


Research Data

Air-flow rate[m ³ /h]	3995
Pressure[Pa]	1162
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV352ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	42
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	2.2
IP	55
INS	



MTCV352ATEX

Pe-el antistatic moulded housing - PP moulded impeller - stainless steel screws

Certificazioni





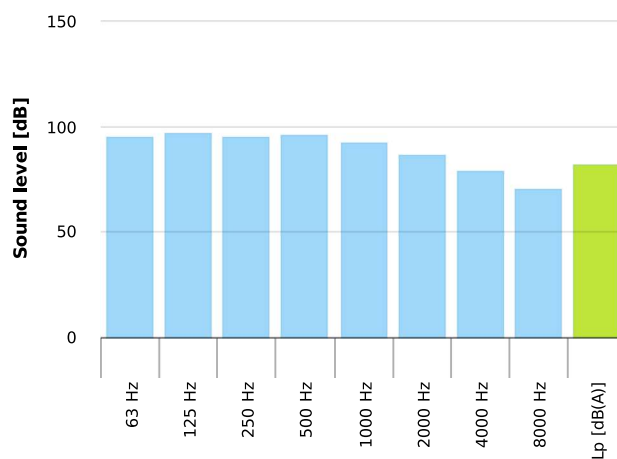


Table engines


Class IE	IE1	IE2	IE3
Size	90L	90L	90L
Power[kW]	2.2	2.2	2.2
Current[A]	4.61	4.6	4.4
Voltage[V]	400	400	400
Cos φ	0.85	0.83	0.84
n	0.81	0.832	0.859

Working point

Q [m³/h]	3995
P_{sta} [Pa]	1162.
P_{tot} [Pa]	1212.
P_{in} [kW] [W]	1738.
n_{sta}	0.743
n_{tot}	0.774
Rpm	2850

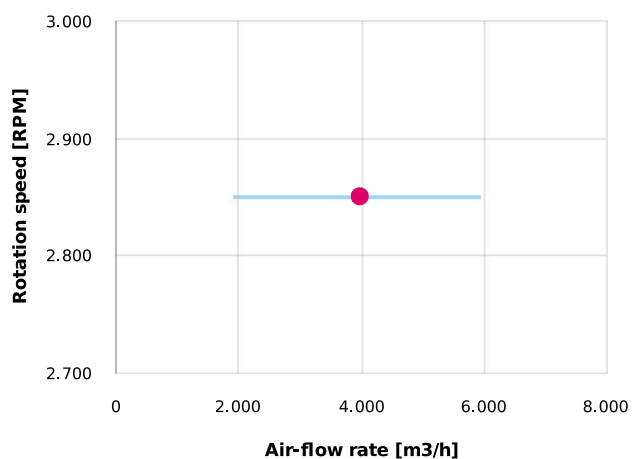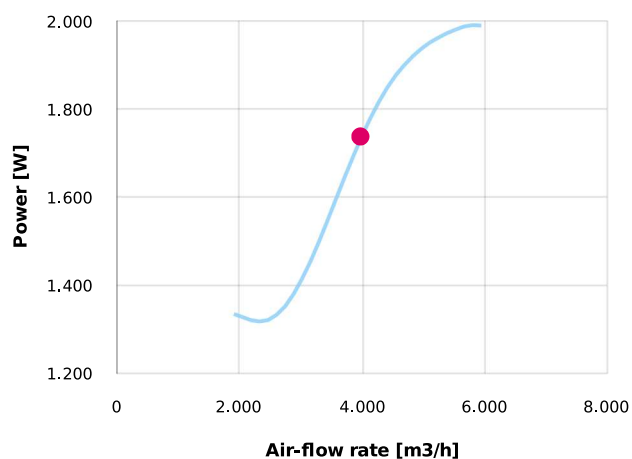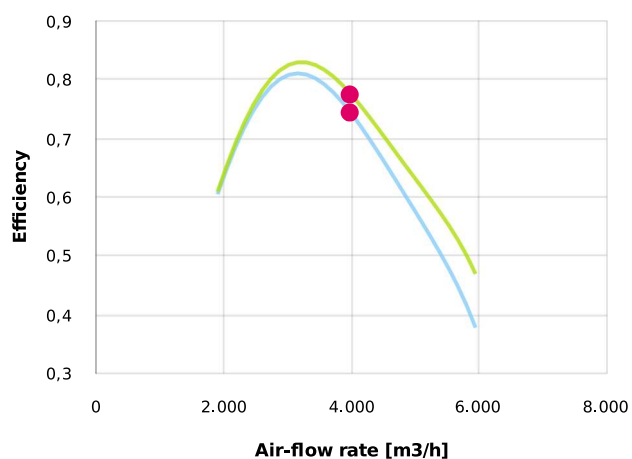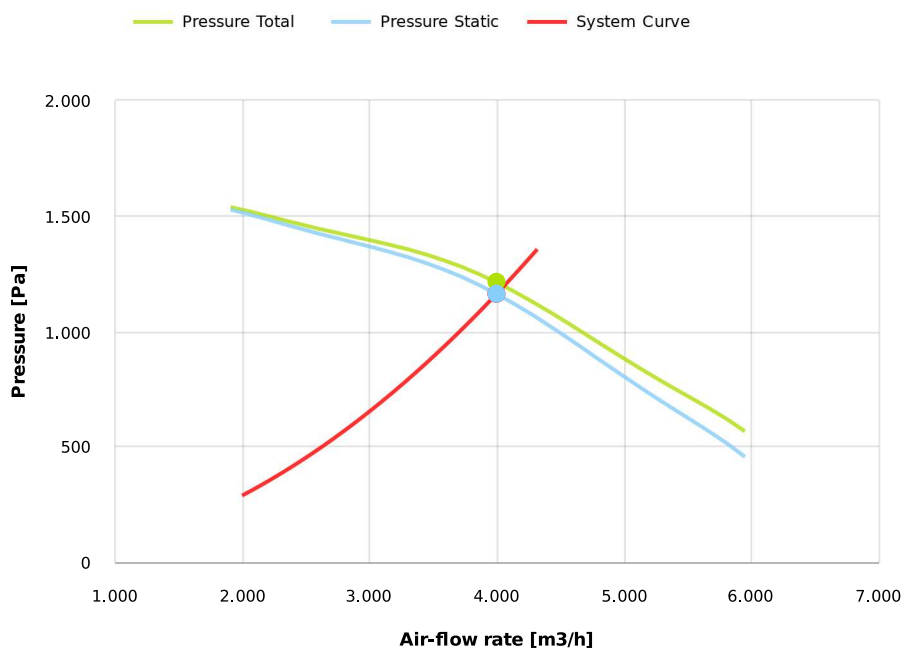

Dimensions

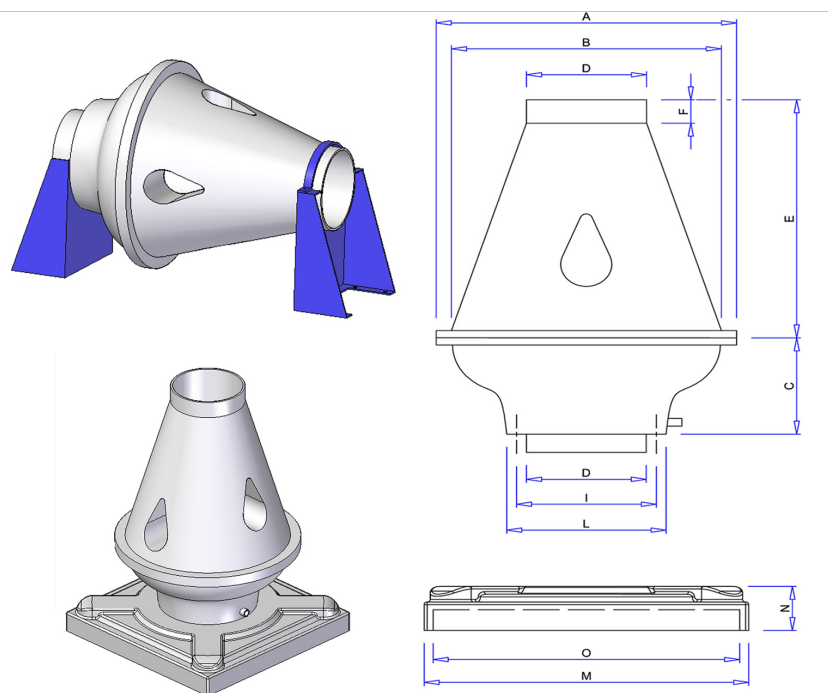

A	B	C	D	E	F	I	L	M	N	N°	O
600	560	240	280	600	50	325	365	540	80	8	490

Configurations & cad

LG 0°

