


Research Data

Air-flow rate[m ³ /h]	1394
Pressure[Pa]	114.3
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV356ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	29
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	



MTCV356ATEX

Pe-el antistatic moulded housing - PP moulded impeller - stainless steel screws

Certificazioni





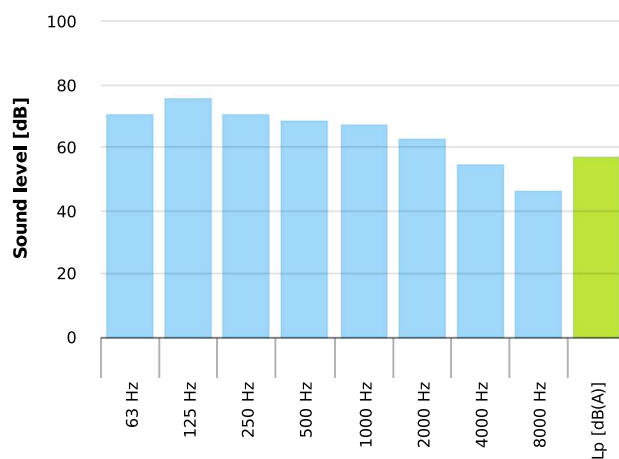


Table engines


Class IE	IE1
Size	71
Power[kW]	0.18
Current[A]	0.7
Voltage[V]	400
Cos φ	0.66
n	0.56

Working point

Q [m³/h]	1394
Psta [Pa]	114.3
Ptot [Pa]	120.4
Pin [kW] [W]	63.10
nsta	0.7
ntot	0.737
Rpm	930

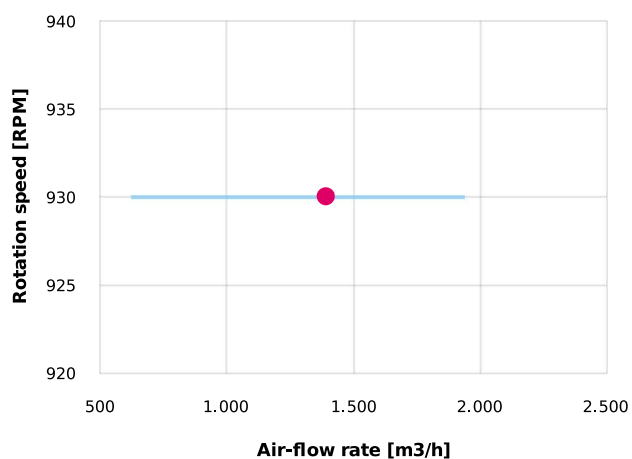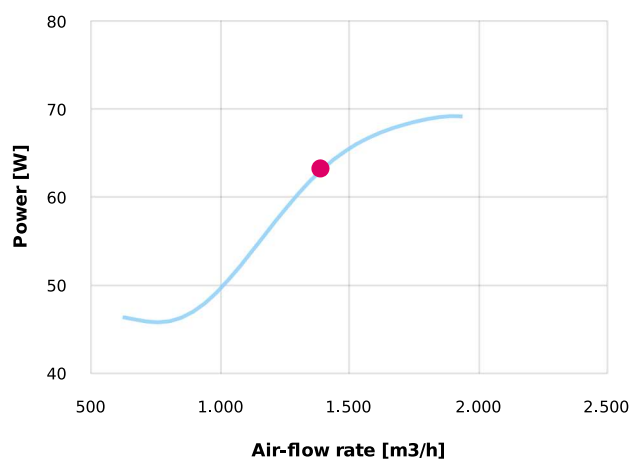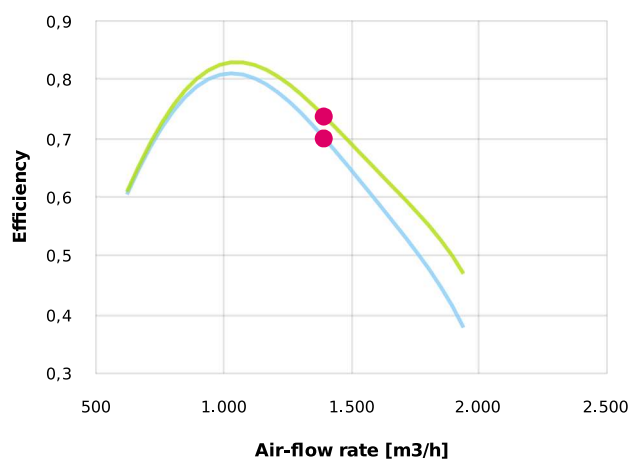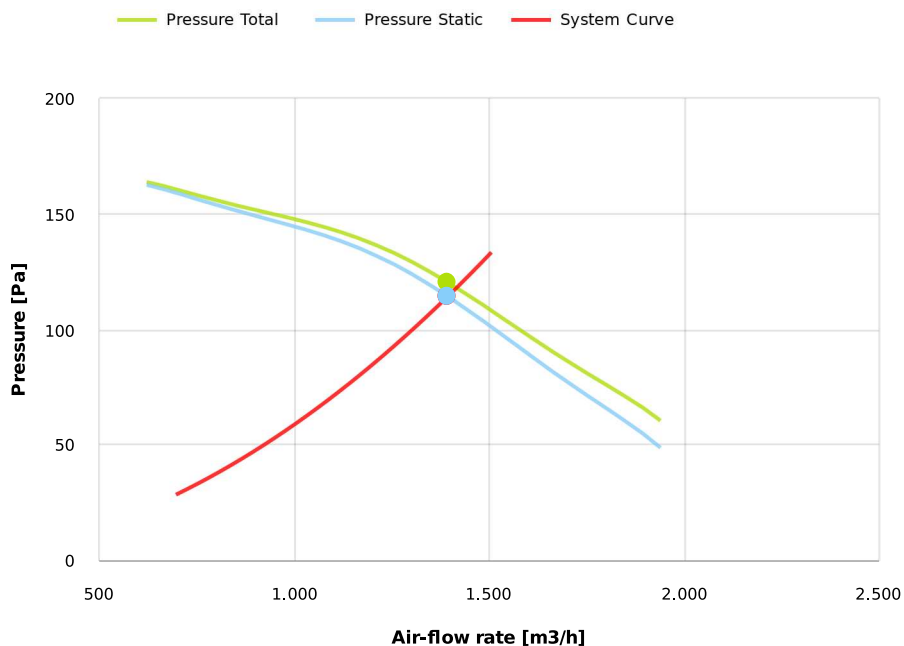

Dimensions

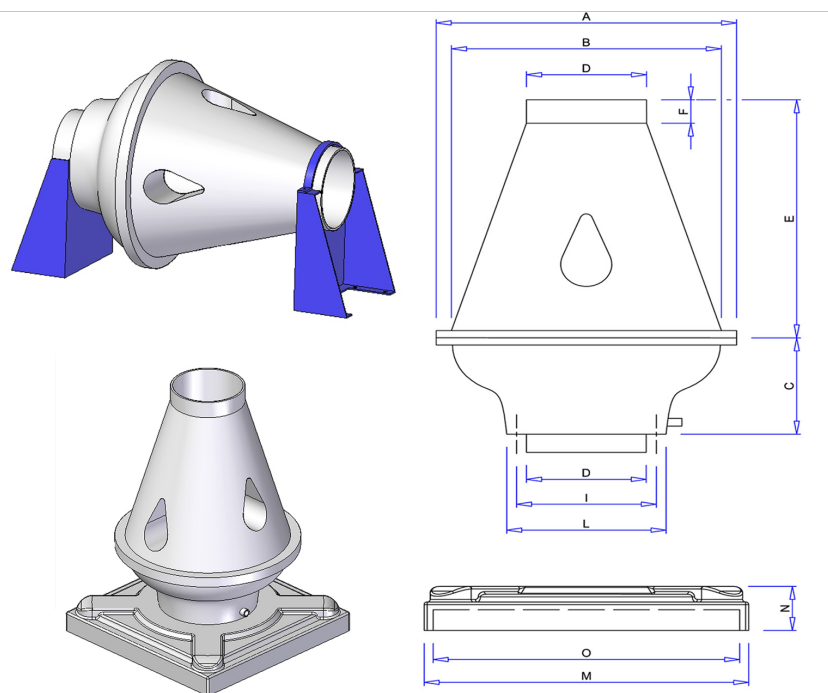

A	B	C	D	E	F	I	L	M	N	N°	O
600	560	240	280	600	50	325	365	540	80	8	490

Configurations & cad

LG 0°

