


Research Data

Air-flow rate[m ³ /h]	4546
Pressure[Pa]	373.8
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV566ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	158
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	1.1
IP	55
INS	



MTCV566ATEX

PP-el antistatic welded housing - PP welded impeller - stainless steel screws

Certificazioni





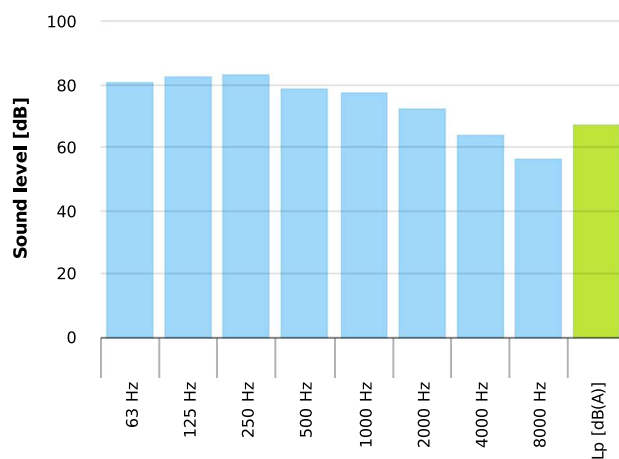


Table engines



Class IE	IE1	IE2	IE3
Size	90L	90L	90L
Power[kW]	1.1	1.1	1.1
Current[A]	3.02	2.95	2.9
Voltage[V]	400	400	400
Cos φ	0.73	0.69	0.67
n	0.72	0.784	0.81

Working point

Q [m ³ /h]	4546
Psta [Pa]	373.8
Ptot [Pa]	383.5
Pin [kW] [W]	667.5
nsta	0.707
ntot	0.725
Rpm	930

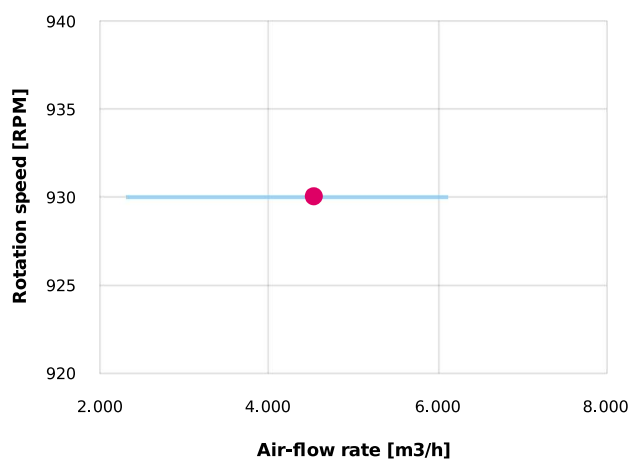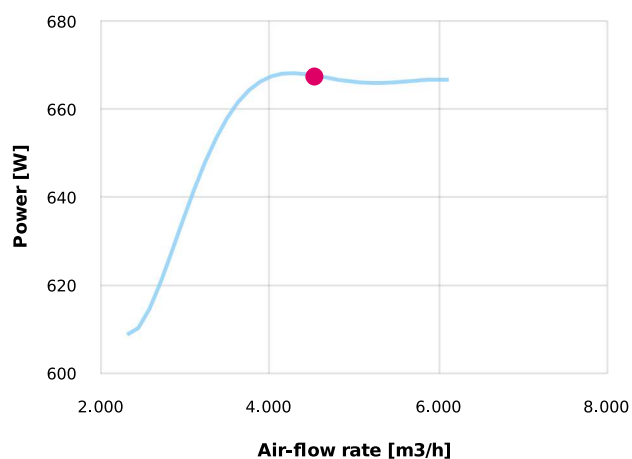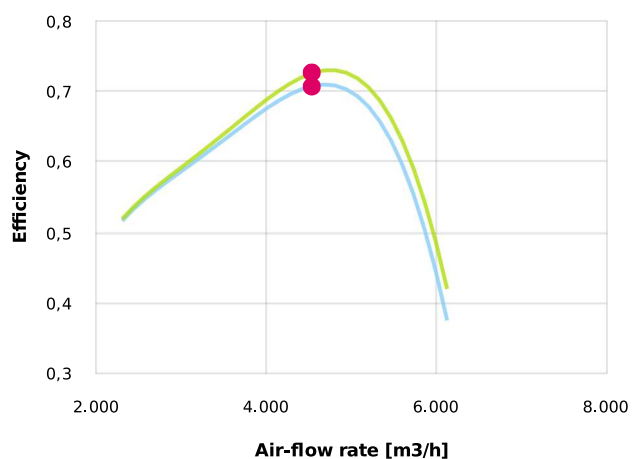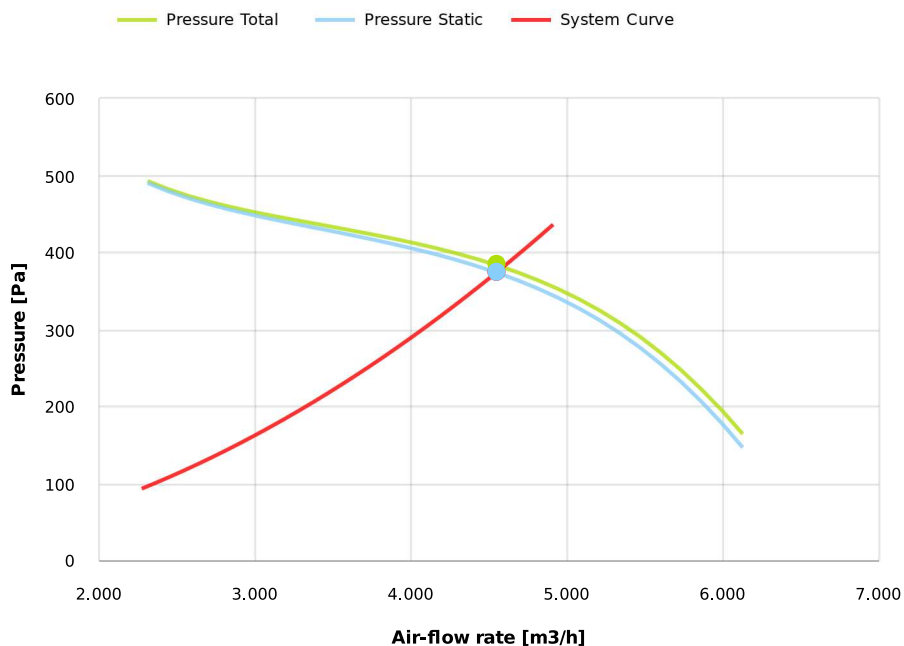

Dimensions

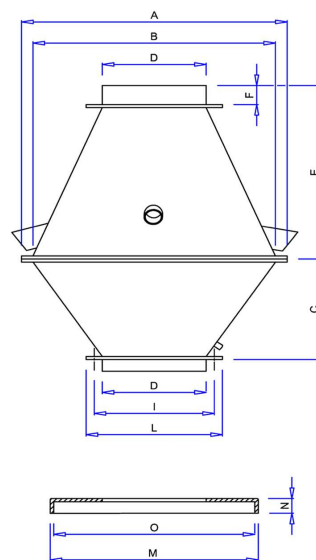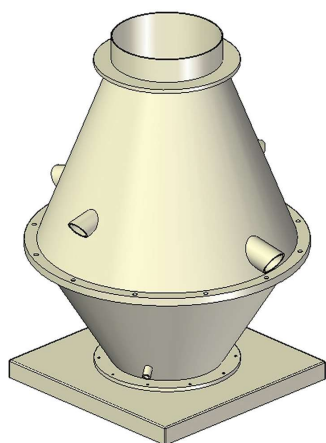

A	B	C	D	E	F	I	L	M	N	N°	O
1150	1050	430	450	800	80	560	600	900	70	10	870

Configurations & cad

LG 0°

