


Research Data

Air-flow rate[m ³ /h]	5450
Pressure[Pa]	726
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV504ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	98
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	2.2
IP	55
INS	



MTCV504ATEX

PP-el antistatic welded housing - PP welded impeller - stainless steel screws

Certificazioni





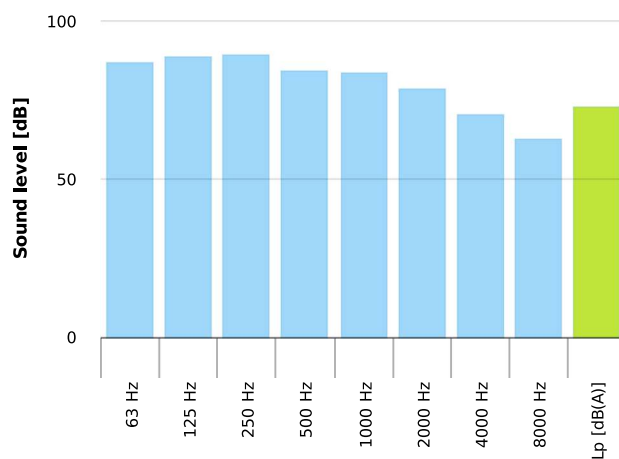


Table engines



Class IE	IE1	IE2	IE3
Size	100L	100L	100L
Power[kW]	2.2	2.2	2.2
Current[A]	4.84	4.89	4.5
Voltage[V]	400	400	400
Cos φ	0.81	0.77	0.82
n	0.81	0.843	0.867

Working point

Q [m ³ /h]	5450
P _{sta} [Pa]	726.0
P _{tot} [Pa]	748.3
P _{in} [kW] [W]	1518.
n _{sta}	0.724
n _{tot}	0.746
Rpm	1450

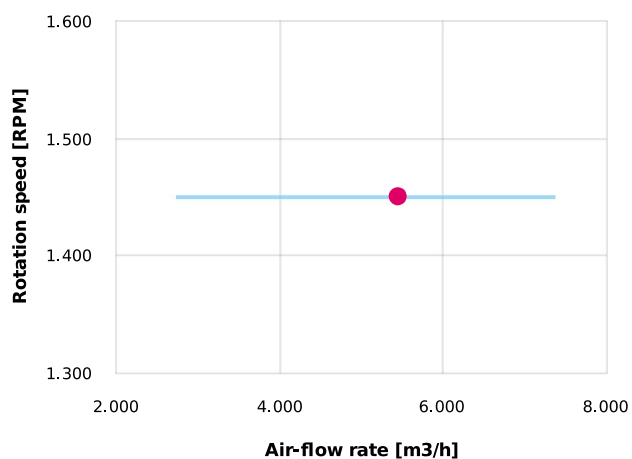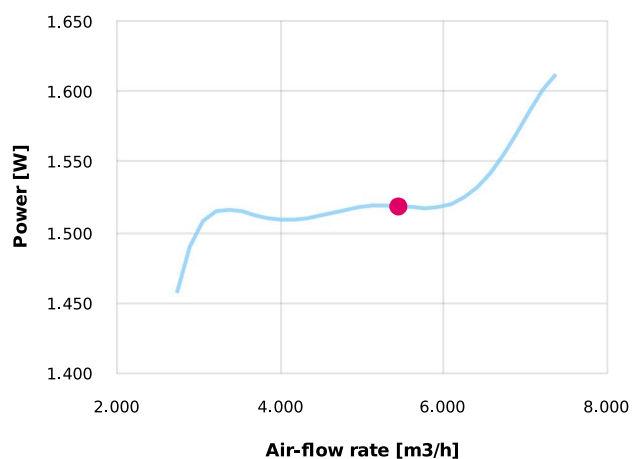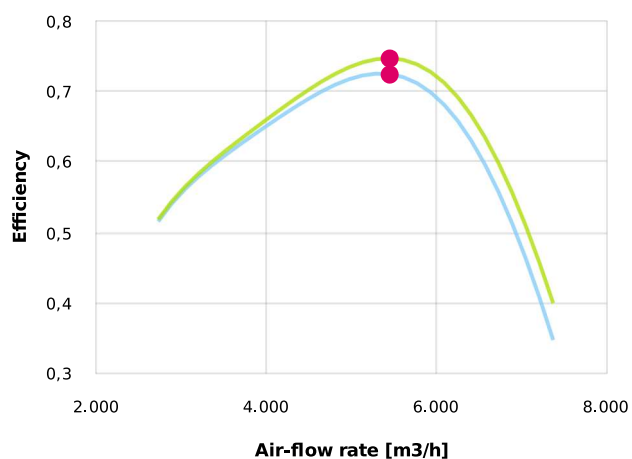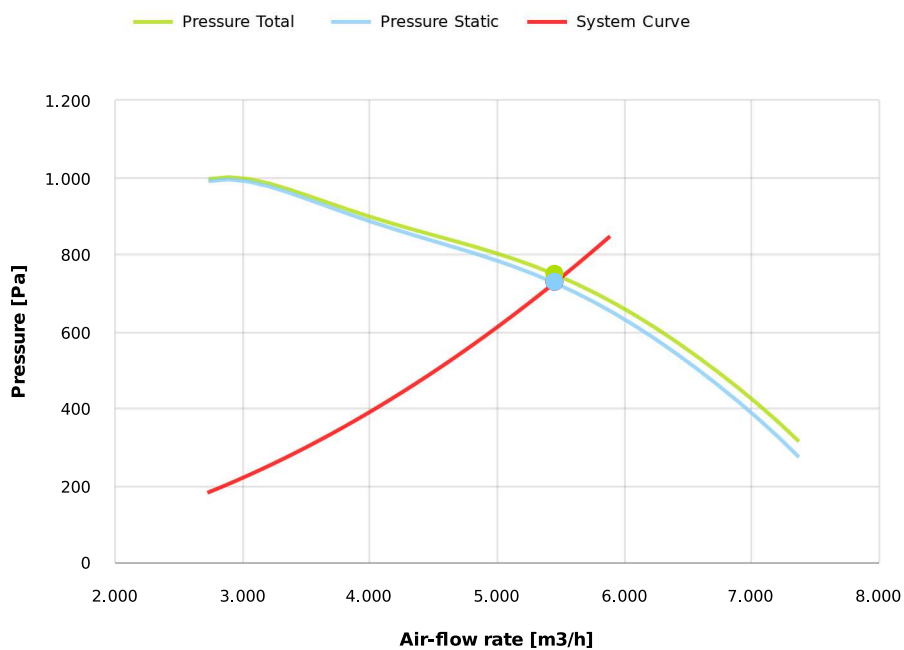

Dimensions

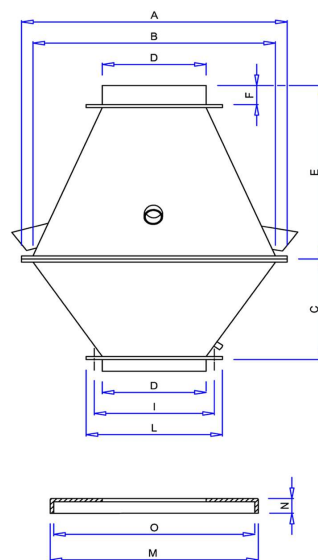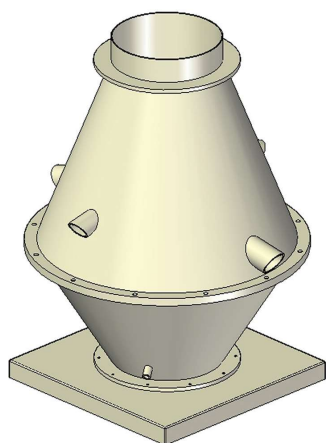

A	B	C	D	E	F	I	L	M	N	N°	O
1000	900	400	400	700	80	510	550	800	70	10	770

Configurations & cad

LG 0°

