


Research Data

Air-flow rate[m ³ /h]	3393
Pressure[Pa]	307.7
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV506ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	89
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.55
IP	55
INS	



MTCV506ATEX

PP-el antistatic welded housing - PP welded impeller - stainless steel screws

Certificazioni





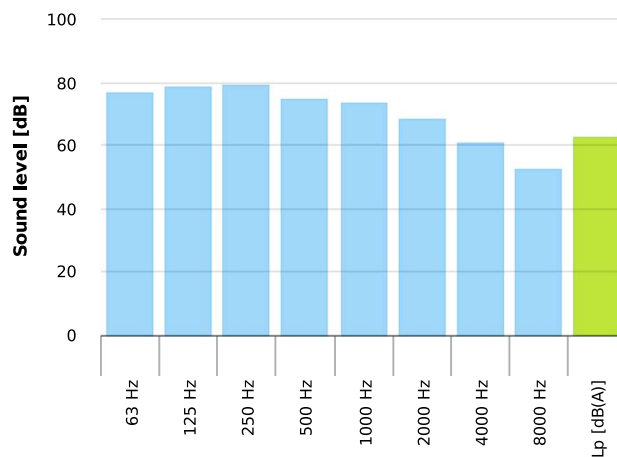


Table engines



Class IE	IE1
Size	80
Power[kW]	0.55
Current[A]	1.65
Voltage[V]	400
Cos φ	0.72
n	0.67

Working point

Q [m ³ /h]	3393
P _{sta} [Pa]	307.7
P _{tot} [Pa]	316.3
P _{in} [kW] [W]	400.7
n _{sta}	0.724
n _{tot}	0.745
Rpm	930

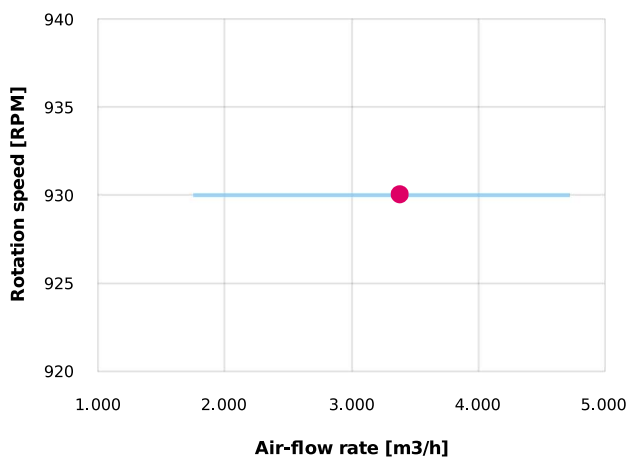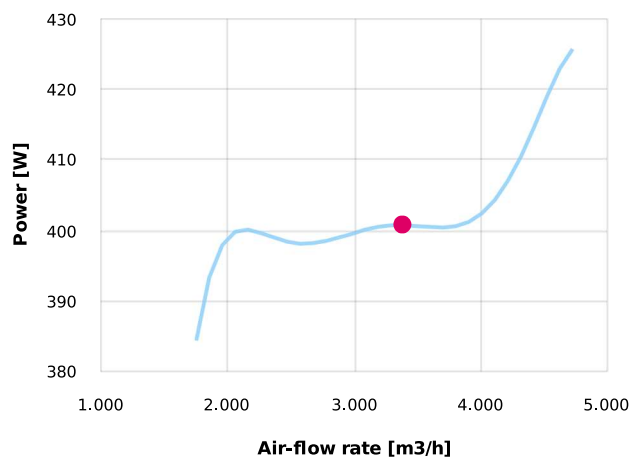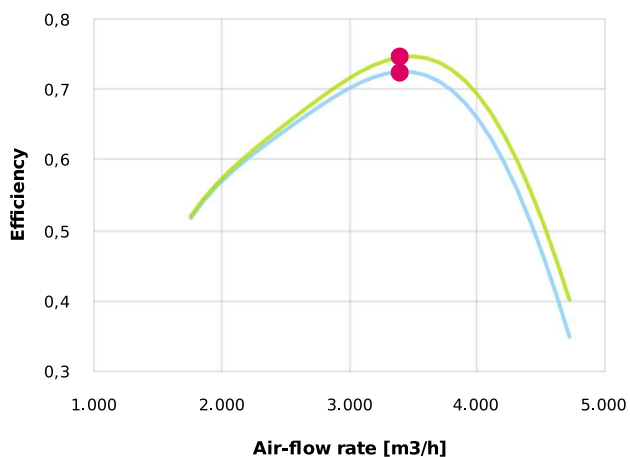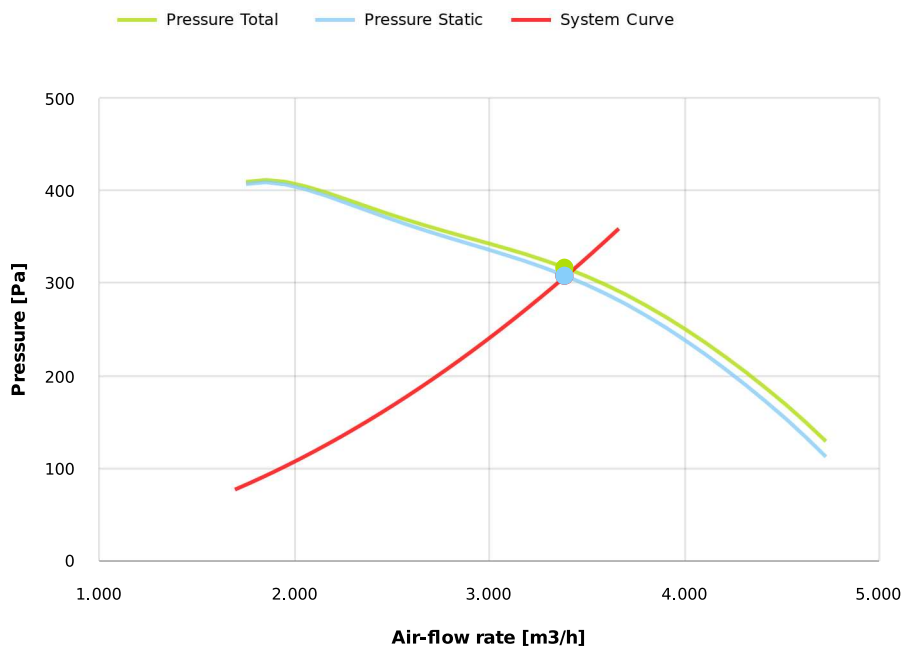

Dimensions

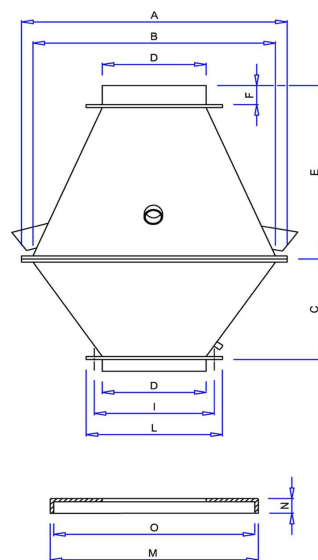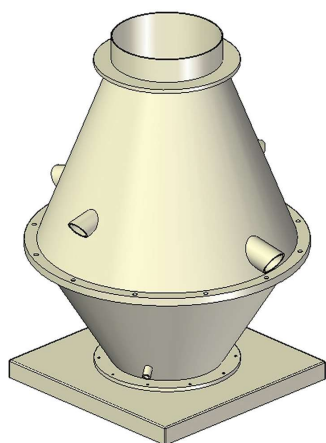

A	B	C	D	E	F	I	L	M	N	N°	O
1000	900	400	400	700	80	510	550	800	70	10	770

Configurations & cad

LG 0°

