


Research Data

Air-flow rate[m ³ /h]	2378
Pressure[Pa]	188.8
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV456ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	46
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.37
IP	55
INS	



MTCV456ATEX

Pe-el antistatic moulded housing - PP moulded impeller - stainless steel screws

Certificazioni





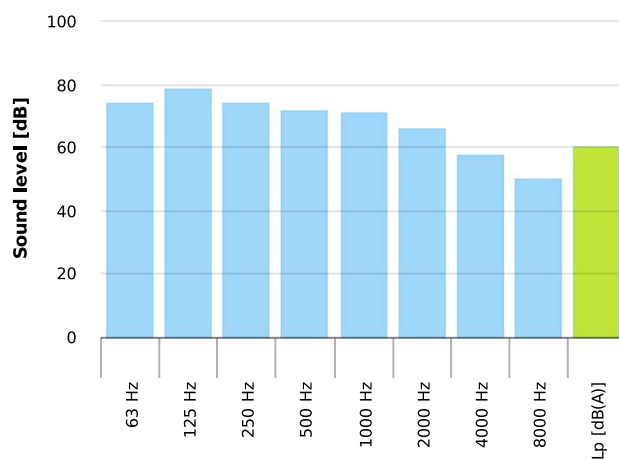


Table engines


Class IE	IE1
Size	71
Power[kW]	0.37
Current[A]	1.27
Voltage[V]	400
Cos φ	0.67
n	0.61

Working point

Q [m³/h]	2378
P_{sta} [Pa]	188.8
P_{tot} [Pa]	195.7
P_{in} [kW] [W]	168.9
n_{sta}	0.737
n_{tot}	0.764
Rpm	930

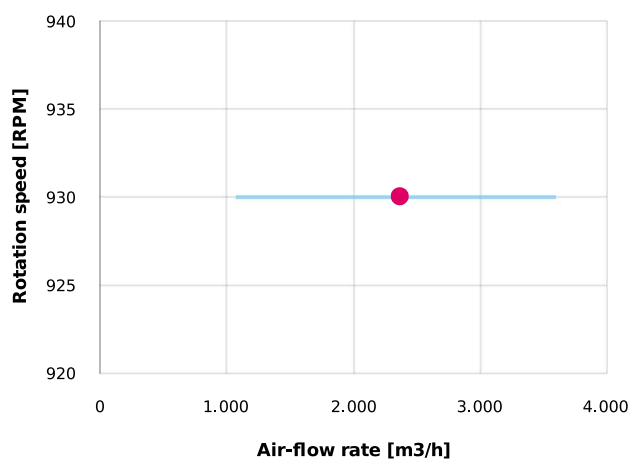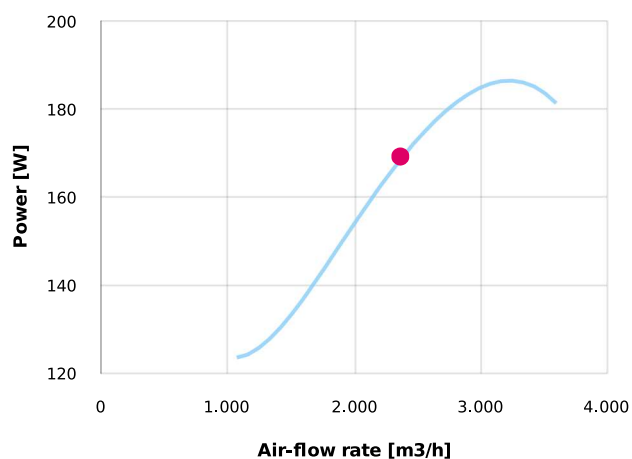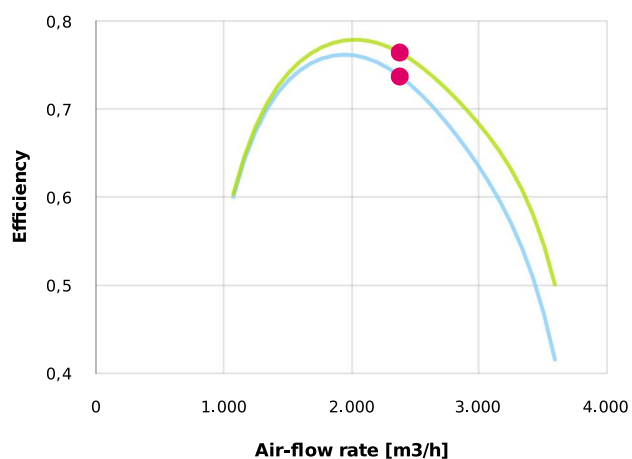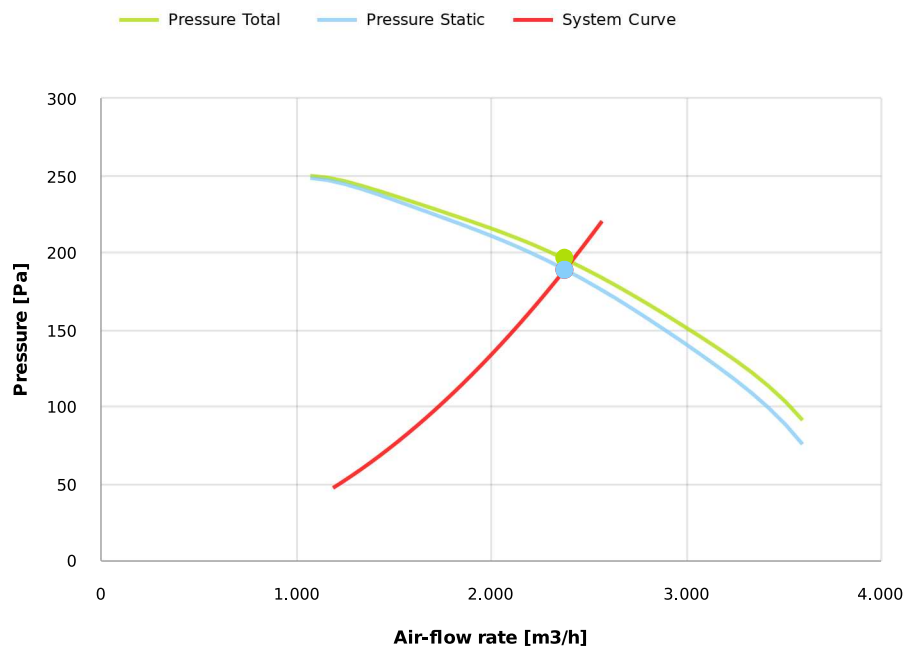

Dimensions

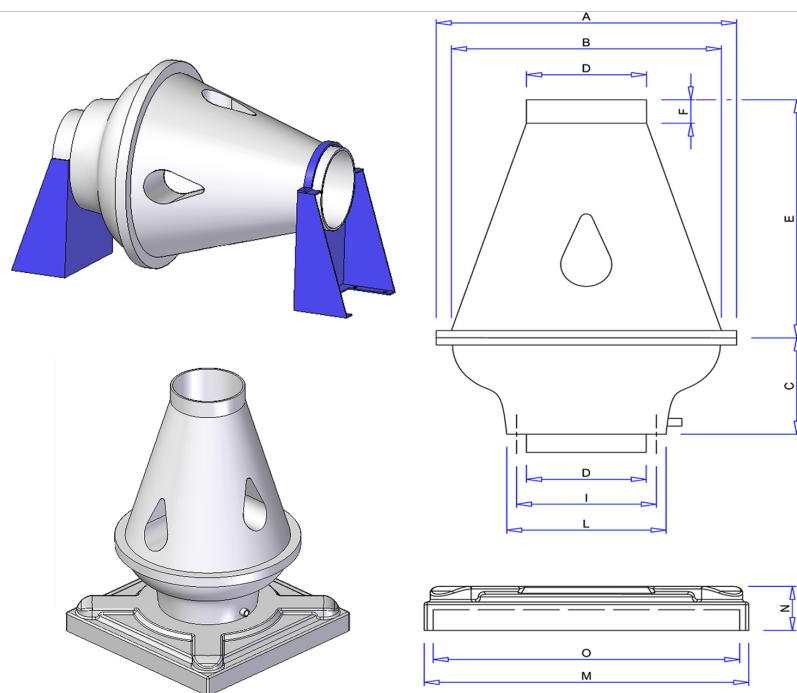

A	B	C	D	E	F	I	L	M	N	N°	O
800	730	280	355	700	50	405	450	750	100	8	700

Configurations & cad

LG 0°

