


Research Data

Air-flow rate[m ³ /h]	4809
Pressure[Pa]	353.3
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV566
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	150
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	1.1
IP	55
INS	


MTCV566

PP welded housing - PP welded impeller - stainless steel screws

Certificazioni





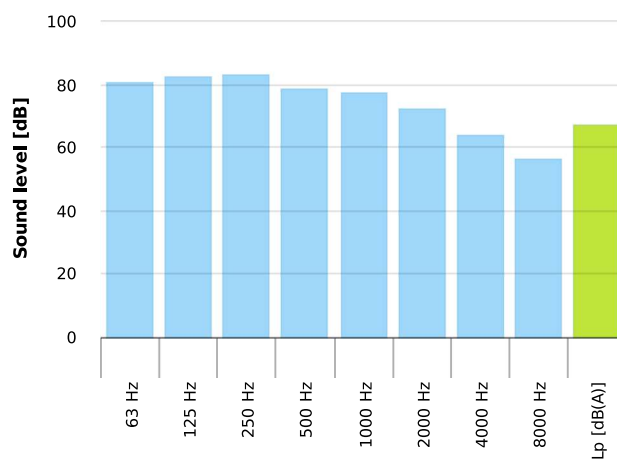


Table engines



Class IE	IE1	IE2	IE3
Size	90L	90L	90L
Power[kW]	1.1	1.1	1.1
Current[A]	3.02	2.95	2.9
Voltage[V]	400	400	400
Cos φ	0.73	0.69	0.67
n	0.72	0.784	0.81

Working point

Q [m³/h]	4809
P_{sta} [Pa]	353.3
P_{tot} [Pa]	364.1
P_{in} [kW] [W]	666.6
n_{sta}	0.708
n_{tot}	0.729
Rpm	930

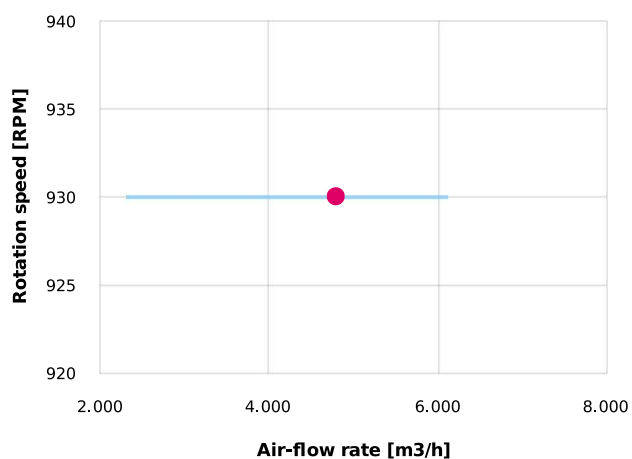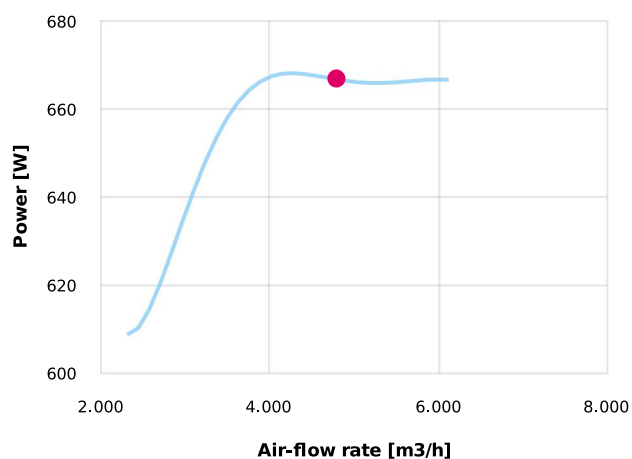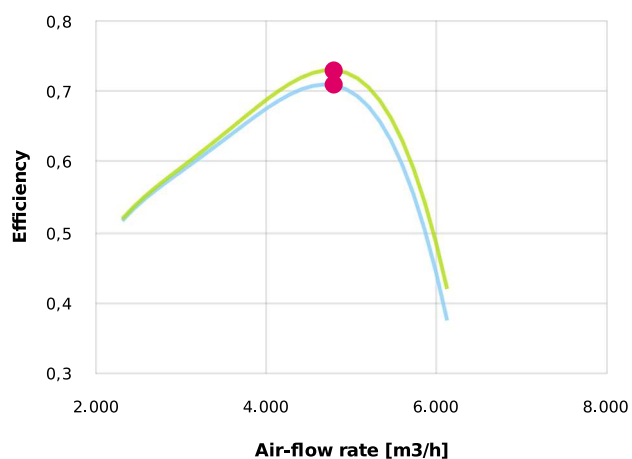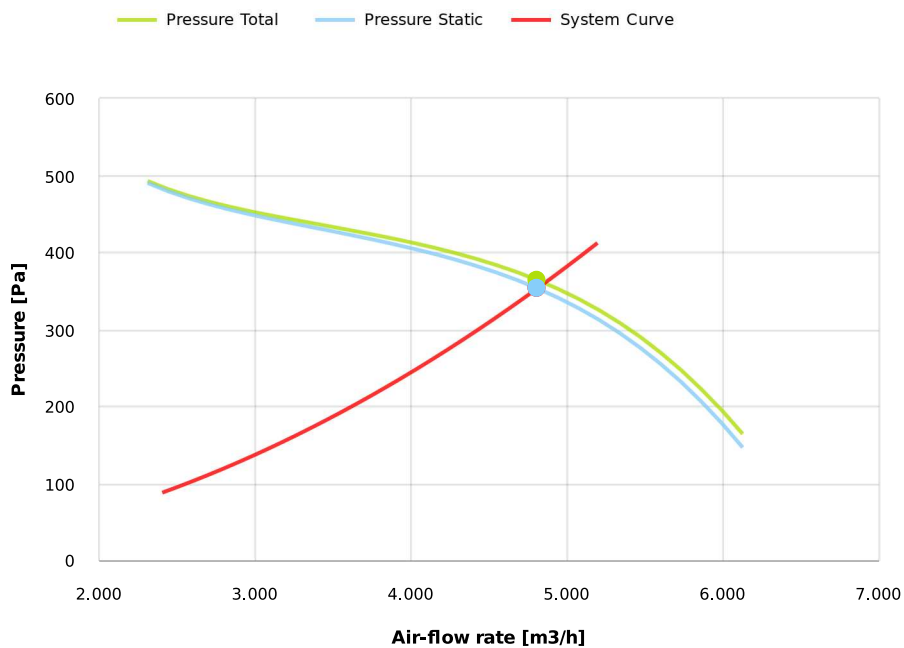

Dimensions

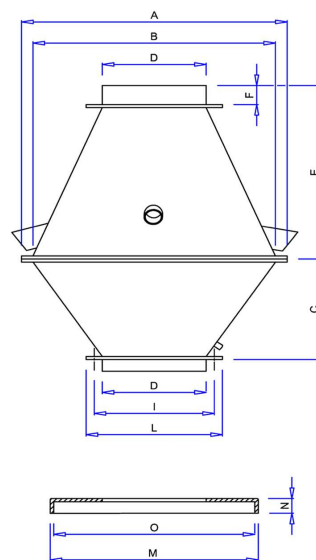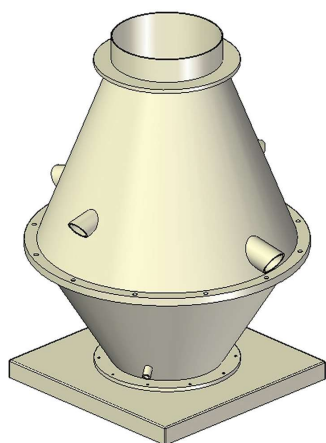

A	B	C	D	E	F	I	L	M	N	N°	O
1150	1050	430	450	800	80	560	600	900	70	10	870

Configurations & cad

LG 0°

