


Research Data

Air-flow rate[m ³ /h]	12094
Pressure[Pa]	1055
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV634ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	162
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	5.5
IP	55
INS	



MTCV634ATEX

PP-el antistatic welded housing - PP welded impeller - stainless steel screws

Certificazioni





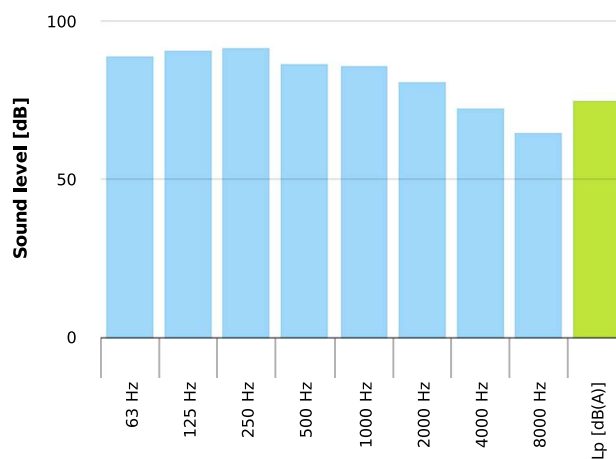


Table engines



Class IE	IE1	IE2	IE3
Size	132S	132S	132S
Power[kW]	5.5	5.5	5.5
Current[A]	11.03	11	10.6
Voltage[V]	400	400	400
Cos φ	0.84	0.82	0.84
n	0.857	0.877	0.896

Working point

Q [m³/h]	12094
P_{sta} [Pa]	1055.
P_{tot} [Pa]	1100.
P_{in} [kW] [W]	4805.
n_{sta}	0.739
n_{tot}	0.77
Rpm	1450

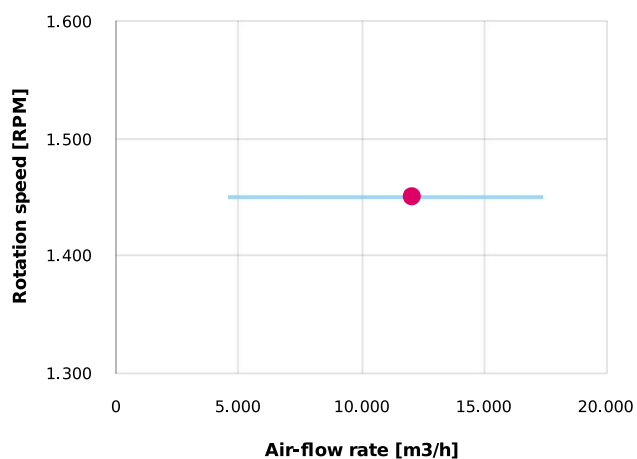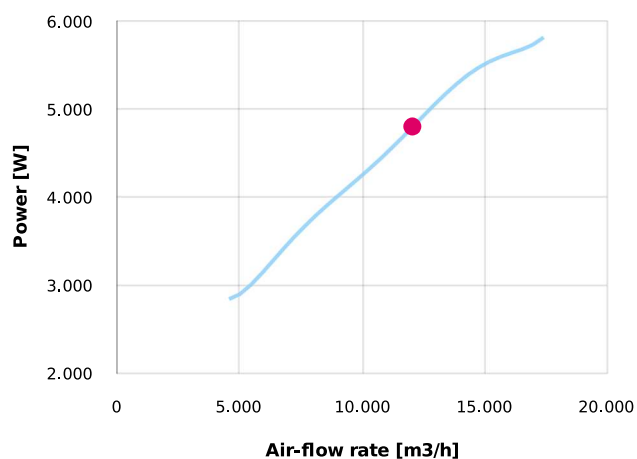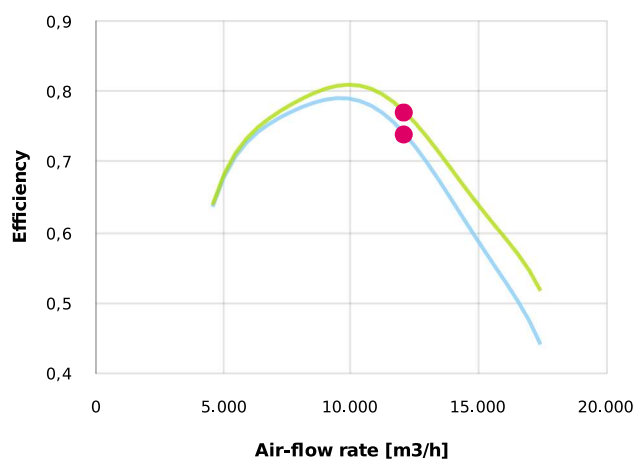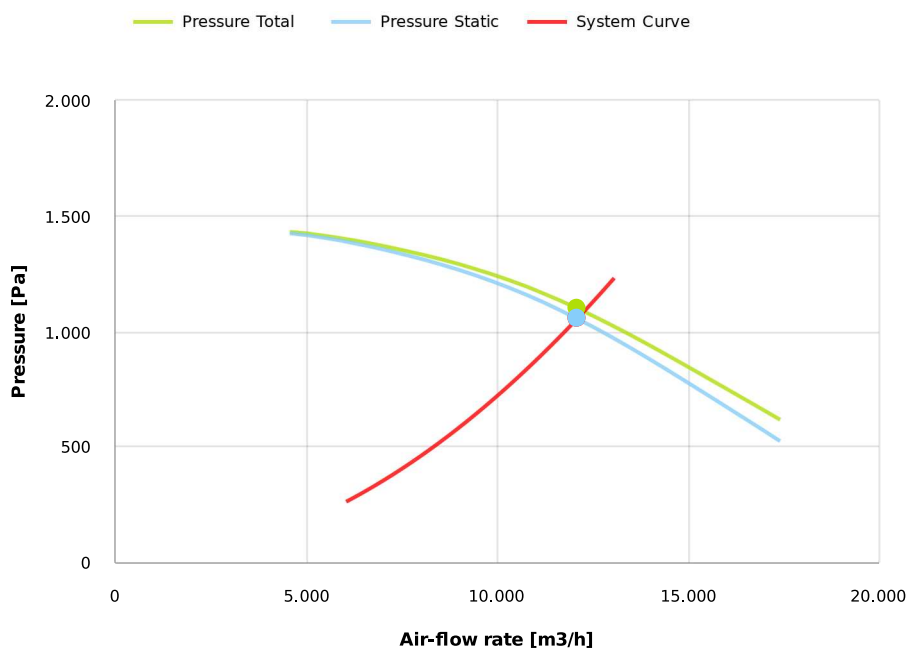

Dimensions

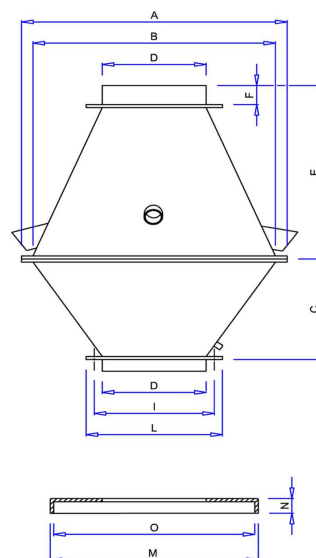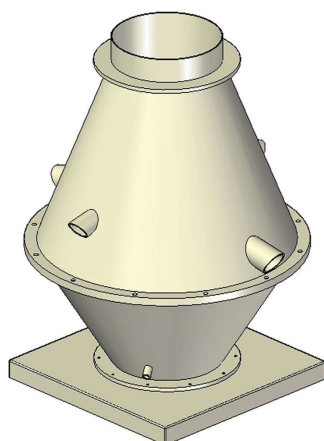

A	B	C	D	E	F	I	L	M	N	N°	O
1300	1200	450	500	900	80	610	650	1000	70	10	970

Configurations & cad

LG 0°

