


Research Data

Air-flow rate[m ³ /h]	12979
Pressure[Pa]	977
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV634
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	150
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	5.5
IP	55
INS	


MTCV634

PP welded housing - PP welded impeller - stainless steel screws

Certificazioni





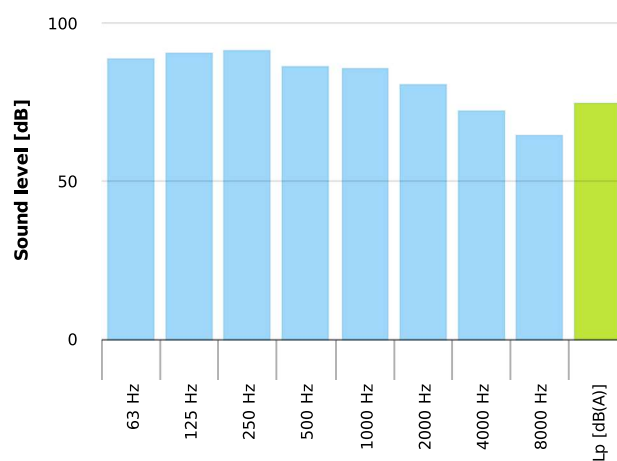


Table engines



Class IE	IE1	IE2	IE3
Size	132S	132S	132S
Power[kW]	5.5	5.5	5.5
Current[A]	11.03	11	10.6
Voltage[V]	400	400	400
Cos φ	0.84	0.82	0.84
n	0.857	0.877	0.896

Working point

Q [m ³ /h]	12979
P _{sta} [Pa]	977.0
P _{tot} [Pa]	1028.
P _{in} [kW] [W]	5056.
n _{sta}	0.698
n _{tot}	0.734
Rpm	1450

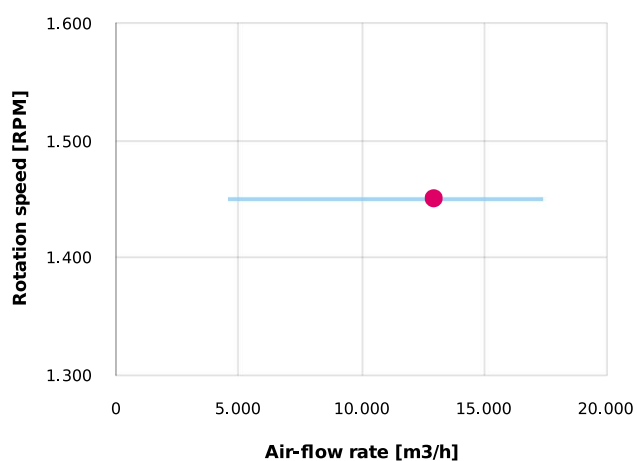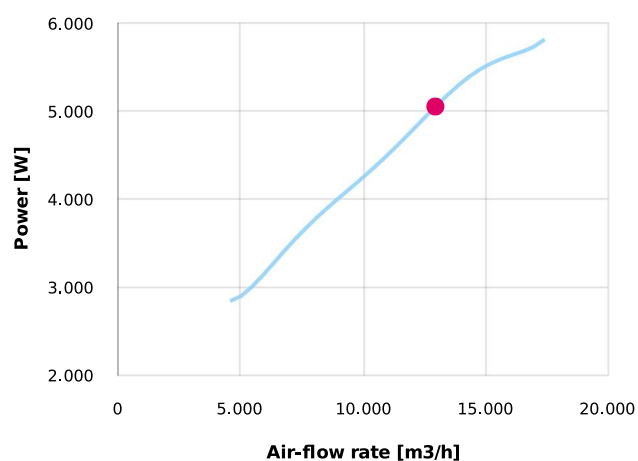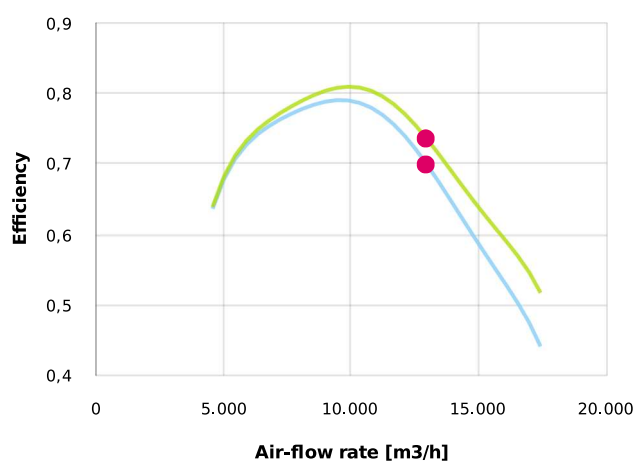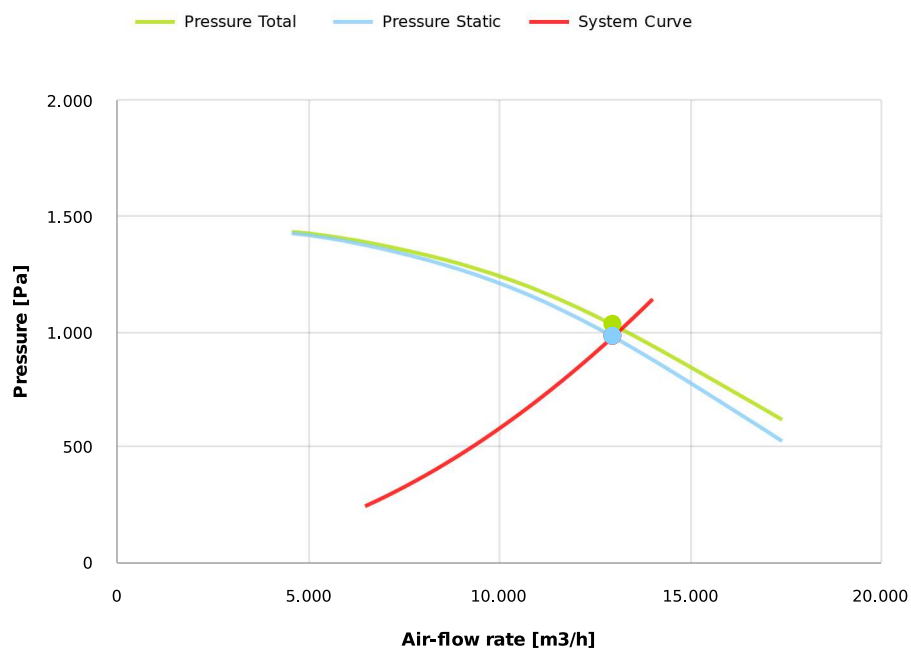

Dimensions

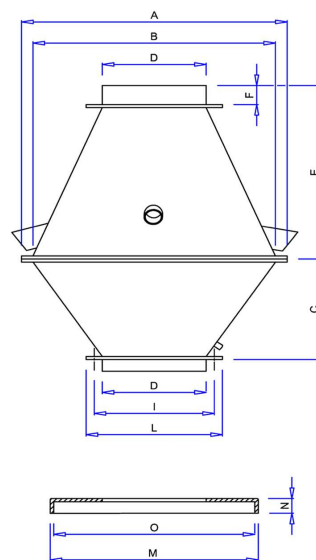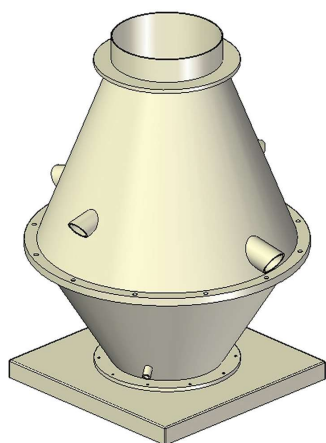

A	B	C	D	E	F	I	L	M	N	N°	O
1300	1200	450	500	900	80	610	650	1000	70	10	970

Configurations & cad

LG 0°

