


Research Data

Air-flow rate[m ³ /h]	8040
Pressure[Pa]	418.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV636
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	180
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	2.2
IP	55
INS	


MTCV636

PP welded housing - PP welded impeller - stainless steel screws

Certificazioni





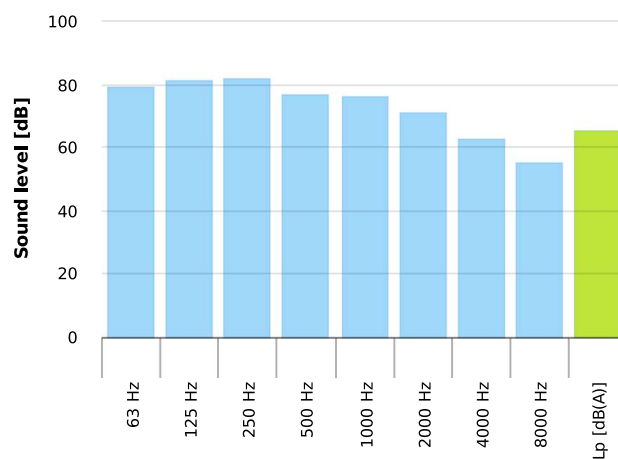


Table engines



Class IE	IE1	IE2	IE3
Size	112M	112M	112M
Power[kW]	2.2	2.2	2.2
Current[A]	5.43	5.18	5.3
Voltage[V]	400	400	400
Cos φ	0.76	0.75	0.72
n	0.77	0.818	0.843

Working point

Q [m³/h]	8040
P_{sta} [Pa]	418.5
P_{tot} [Pa]	438.3
P_{in} [kW] [W]	1301.
n_{sta}	0.719
n_{tot}	0.753
Rpm	930

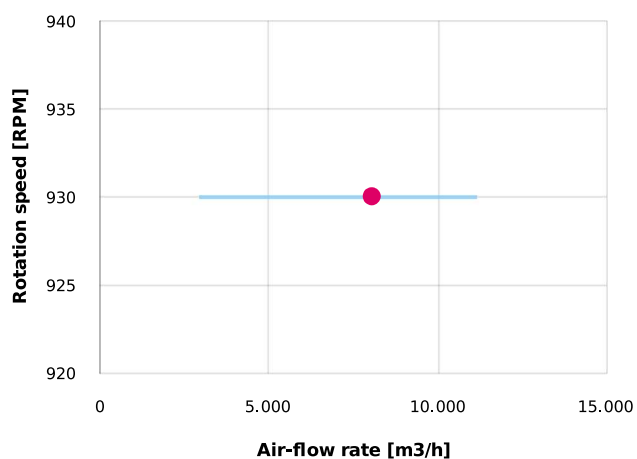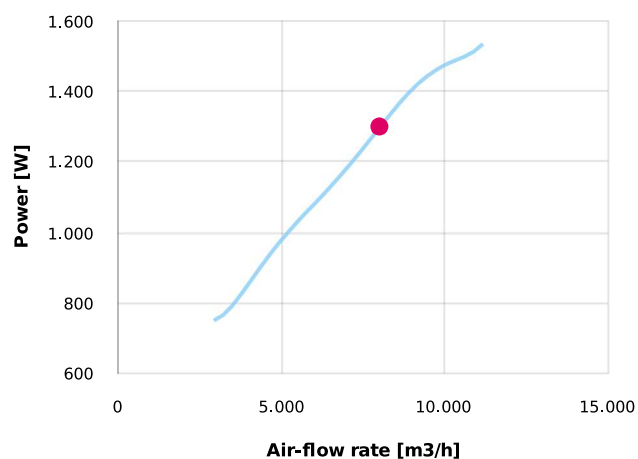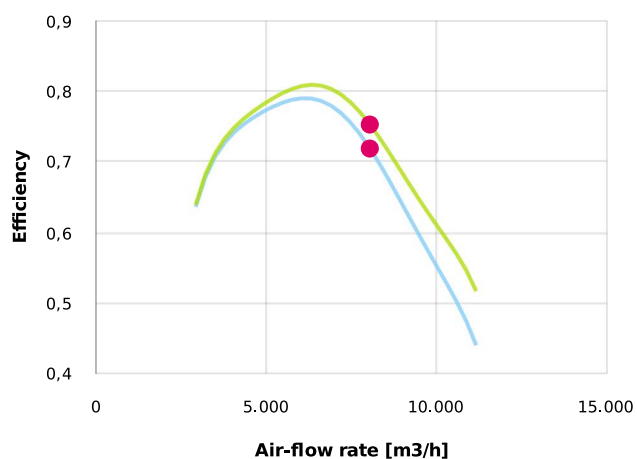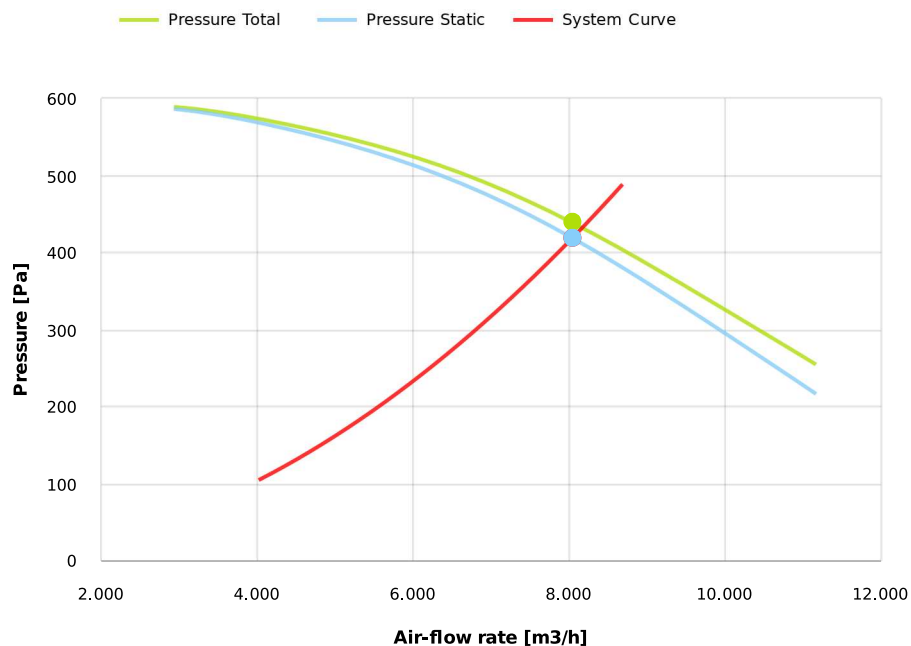

Dimensions

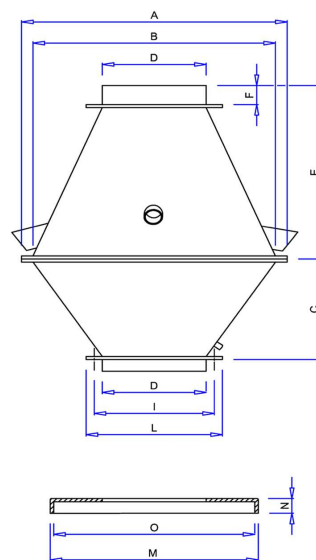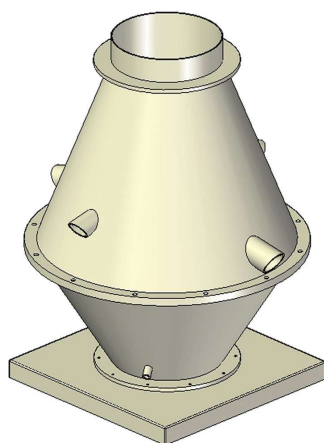

A	B	C	D	E	F	I	L	M	N	N°	O
1300	1200	450	500	900	80	610	650	1000	70	10	970

Configurations & cad

LG 0°

