


Research Data

Air-flow rate[m ³ /h]	10108
Pressure[Pa]	552.8
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	TCV716ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	172
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	4
IP	55
INS	



MTCV716ATEX

PP-el antistatic welded housing - PP welded impeller - stainless steel screws

Certificazioni





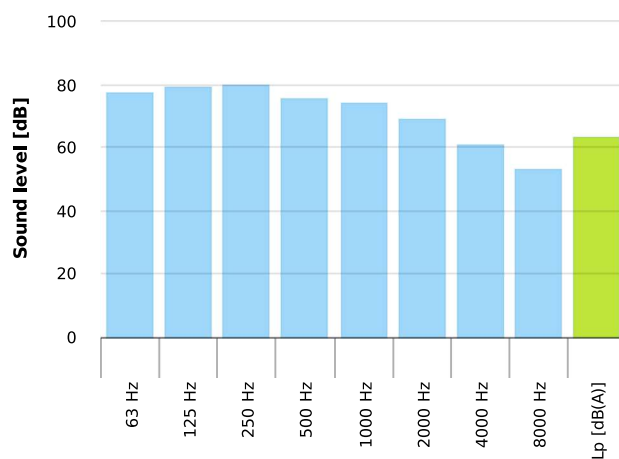


Table engines



Class IE	IE1	IE2	IE3
Size	132M	132M	132M
Power[kW]	4	4	4
Current[A]	9.44	9.1	9
Voltage[V]	400	400	400
Cos φ	0.76	0.75	0.74
n	0.805	0.846	0.868

Working point

Q [m ³ /h]	10108
P _{sta} [Pa]	552.8
P _{tot} [Pa]	567.9
P _{in} [kW] [W]	1969.
n _{sta}	0.786
n _{tot}	0.808
Rpm	930

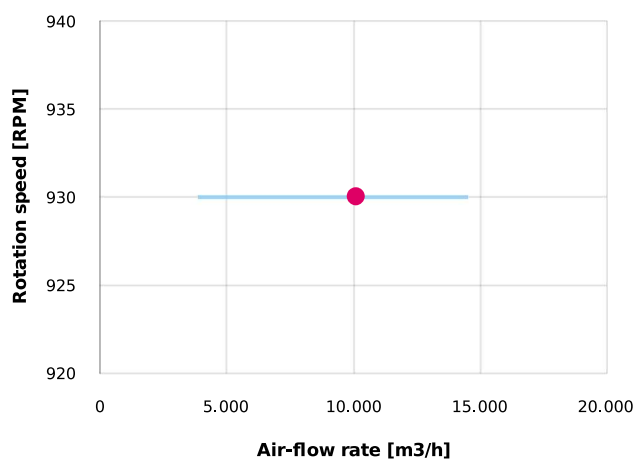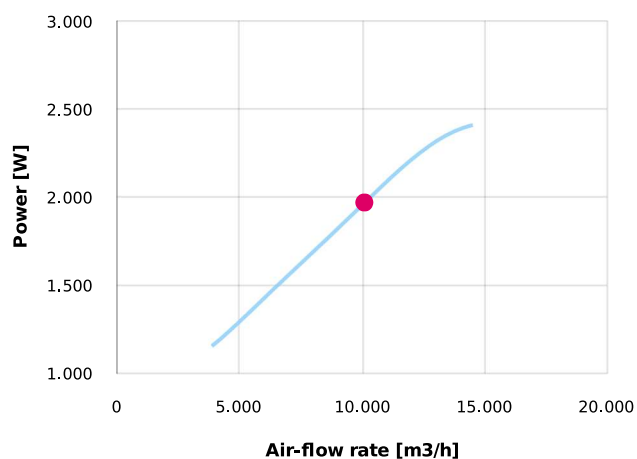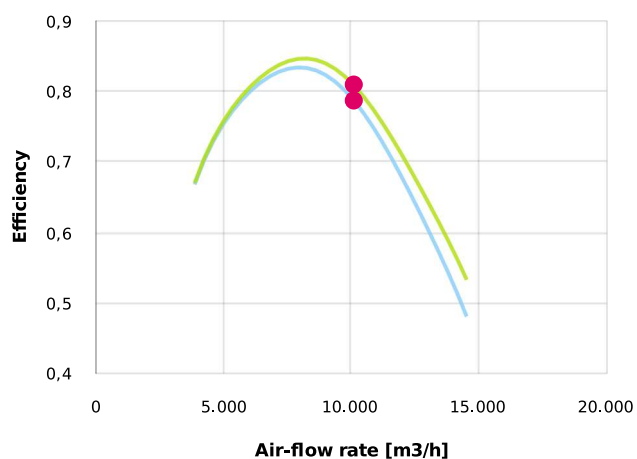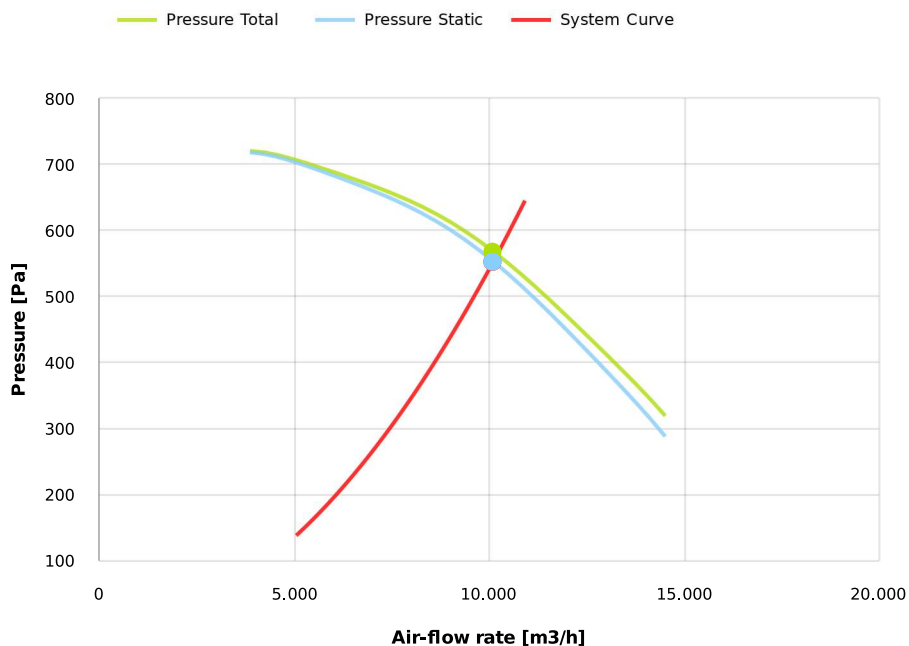


Dimensions

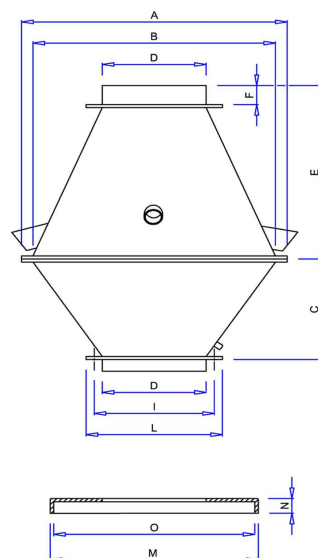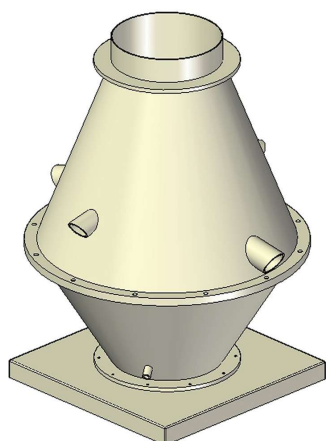


A	B	C	D	E	F	I	L	M	N	N°	O
1350	1270	500	600	1000	80	710	750	1100	70	10	1050

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

