


Research Data

Air-flow rate[m ³ /h]	694.5
Pressure[Pa]	323.2
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO202ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	23
Frequency[Hz]	50
Speed[rpm]	2750
Power[kW]	0.18
IP	55
INS	



P-CO202ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





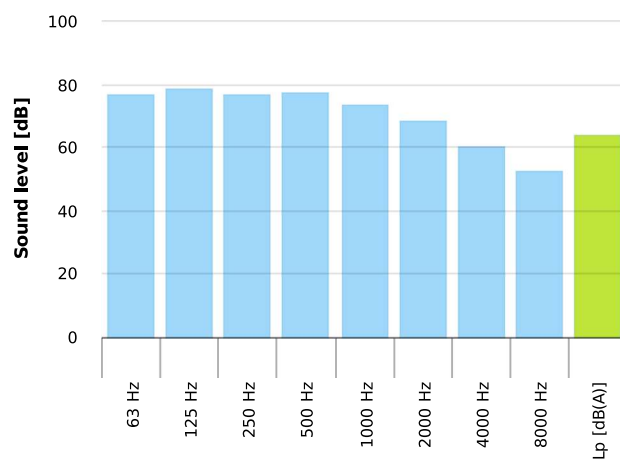


Table engines



Class IE	IE1
Size	63
Power[kW]	0.18
Current[A]	0.55
Voltage[V]	400
Cos φ	0.75
n	0.63

Working point

Q [m ³ /h]	694.5
P _{sta} [Pa]	323.2
P _{tot} [Pa]	337.3
P _{in} [kW] [W]	78.50
n _{sta}	0.794
n _{tot}	0.828
Rpm	2750

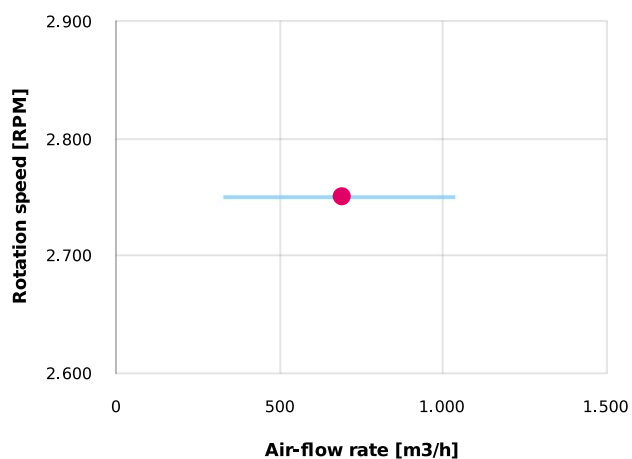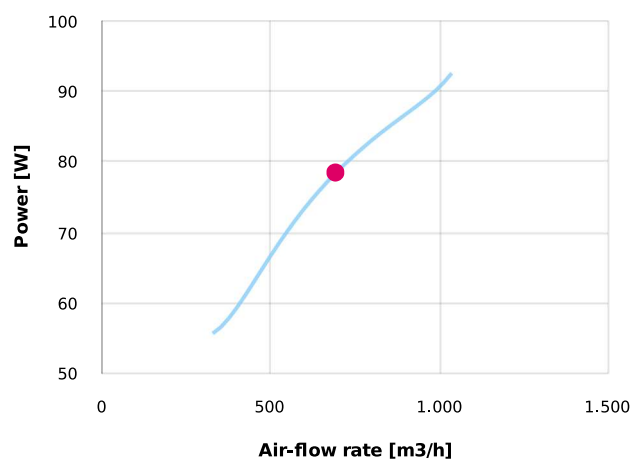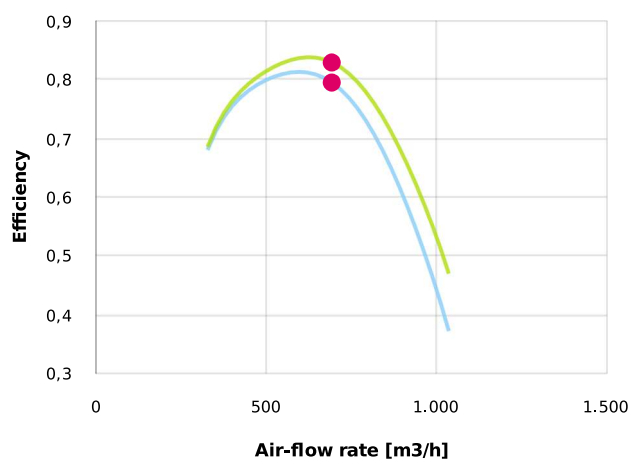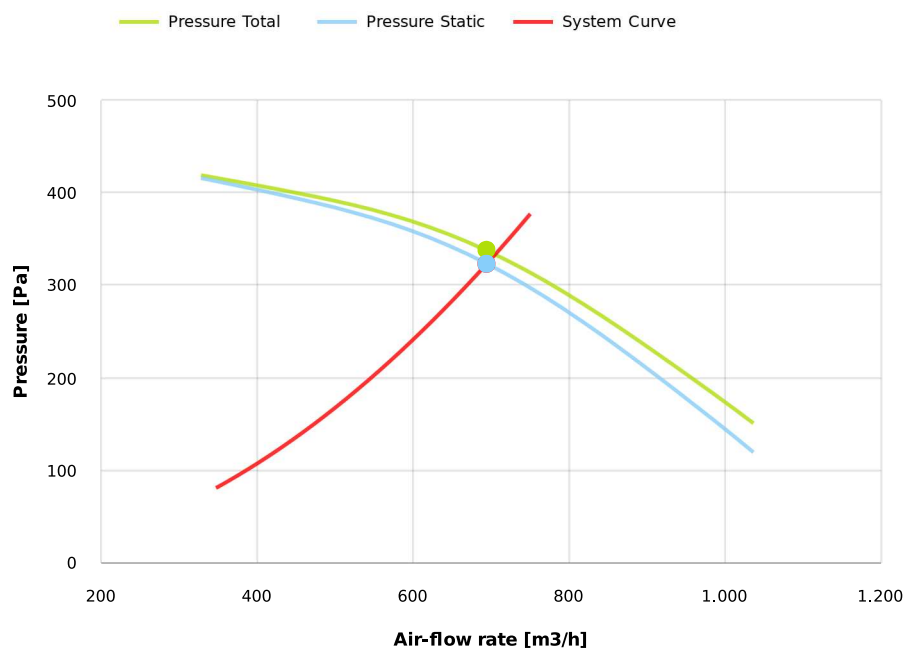

Dimensions

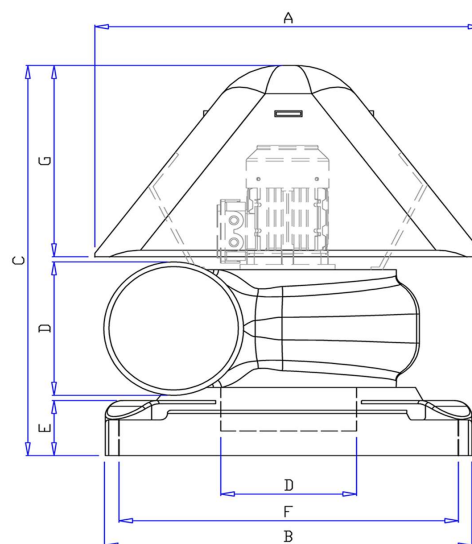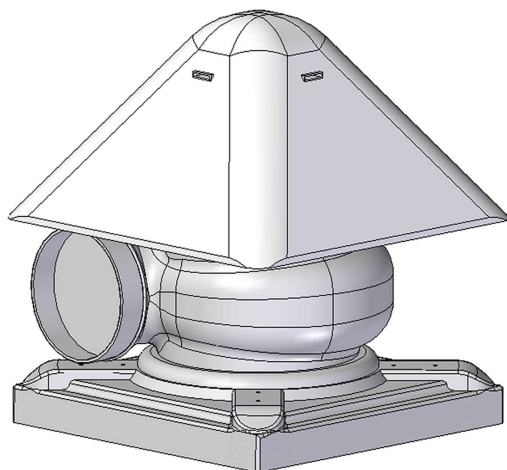

A	B	C	D	E	F	G
570	540	550	160	85	500	320

Configurations & cad

LG 0°

