


Research Data

Air-flow rate[m ³ /h]	353.6
Pressure[Pa]	92.63
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO204ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	23
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	0.12
IP	55
INS	



P-CO204ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





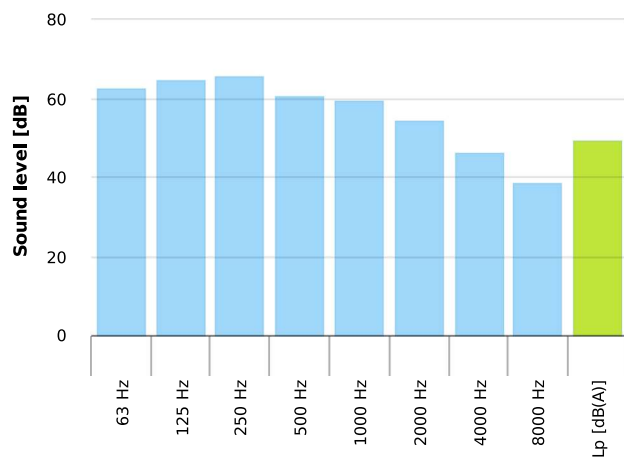


Table engines



Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m ³ /h]	353.6
P _{sta} [Pa]	92.63
P _{tot} [Pa]	96.28
P _{in} [kW] [W]	9.795
n _{sta}	0.802
n _{tot}	0.834
Rpm	1450

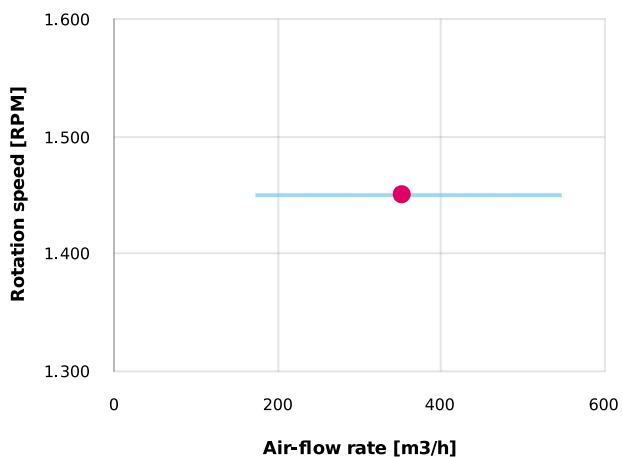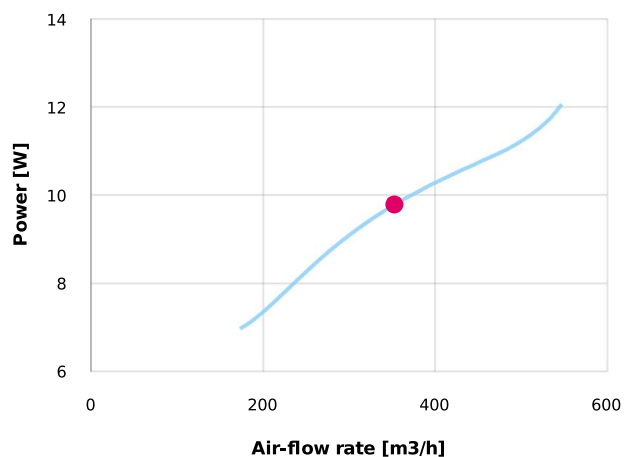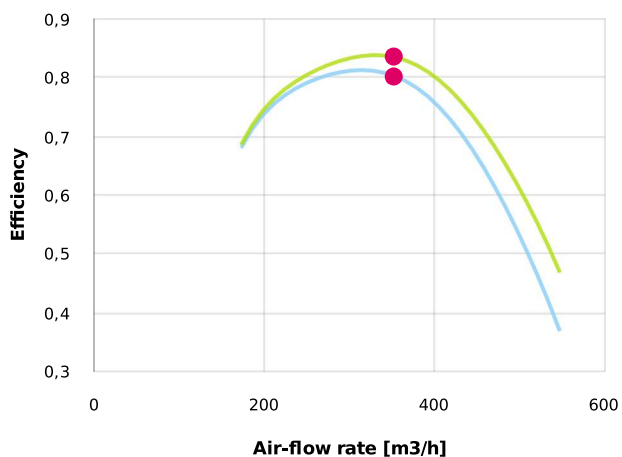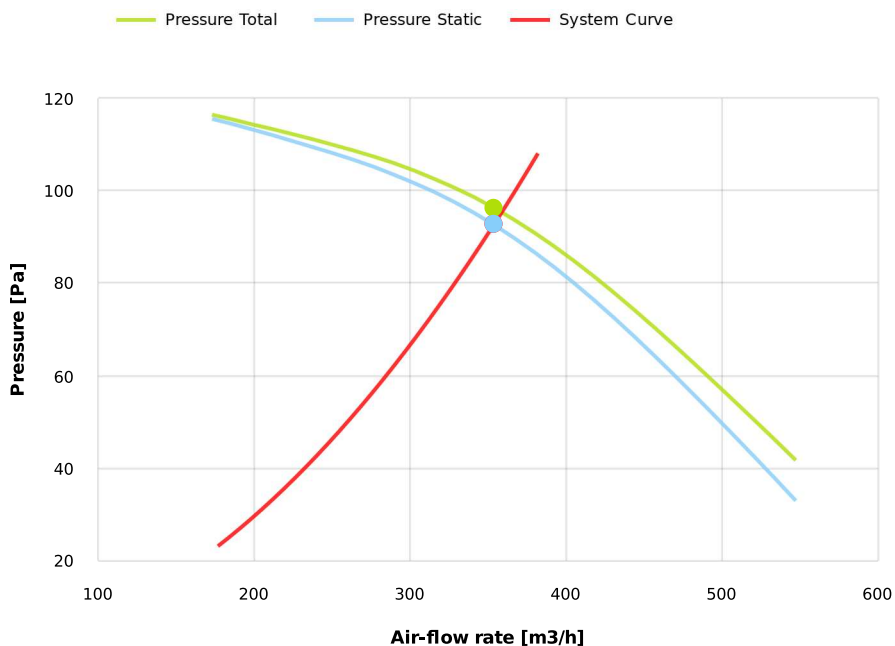

Dimensions

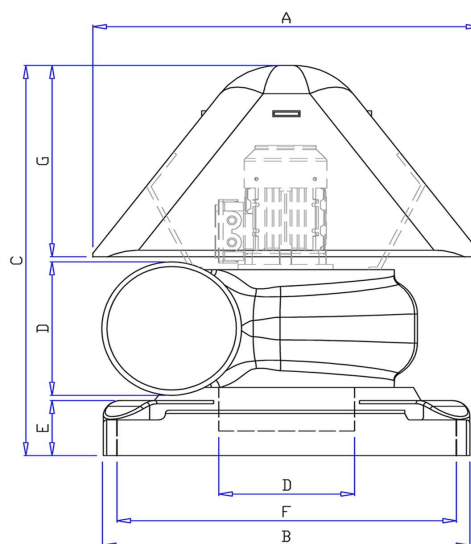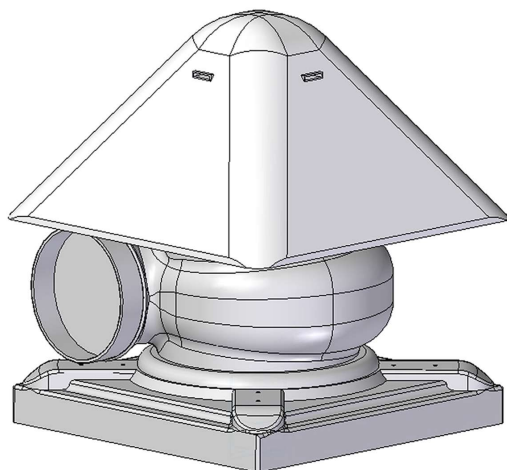

A	B	C	D	E	F	G
570	540	550	160	85	500	320

Configurations & cad

LG 0°

