


Research Data

Air-flow rate[m ³ /h]	1002
Pressure[Pa]	458.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO222ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	26
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	0.25
IP	55
INS	


P-CO222ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





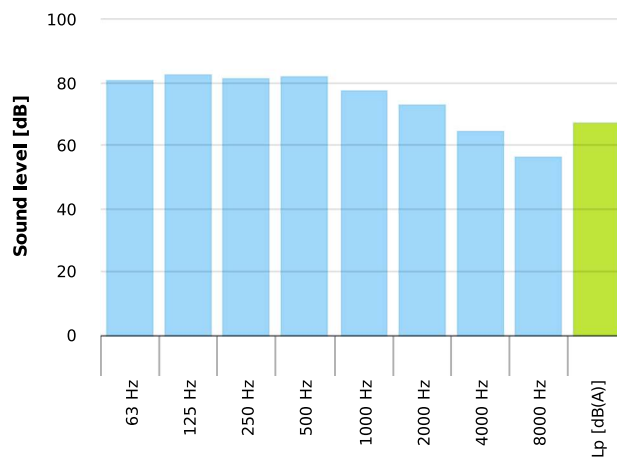


Table engines



Class IE	IE1
Size	63
Power[kW]	0.25
Current[A]	0.71
Voltage[V]	400
Cos φ	0.78
n	0.65

Working point

Q [m ³ /h]	1002
P _{sta} [Pa]	458.5
P _{tot} [Pa]	470.6
P _{in} [kW] [W]	153.2
n _{sta}	0.831
n _{tot}	0.853
Rpm	2800

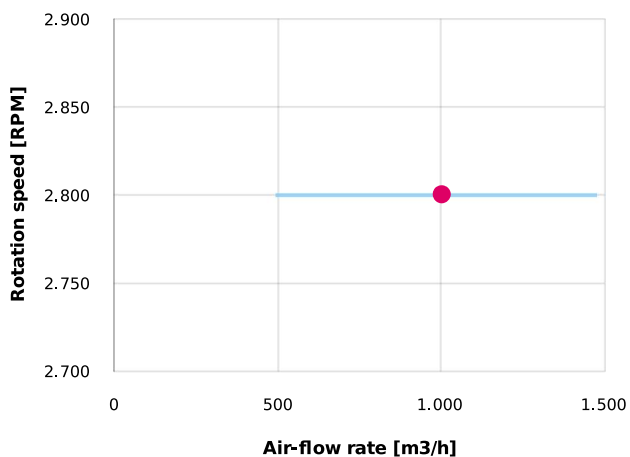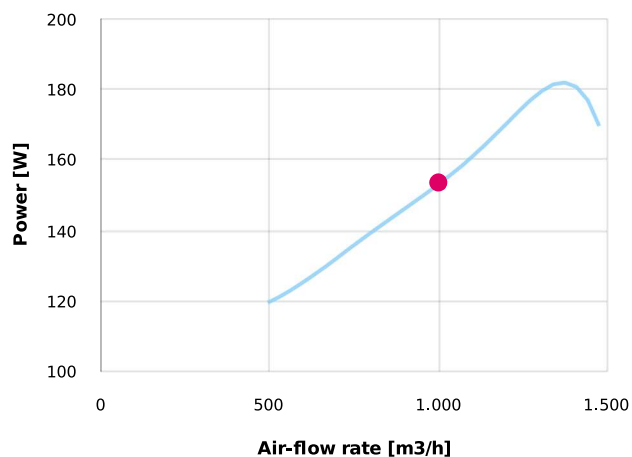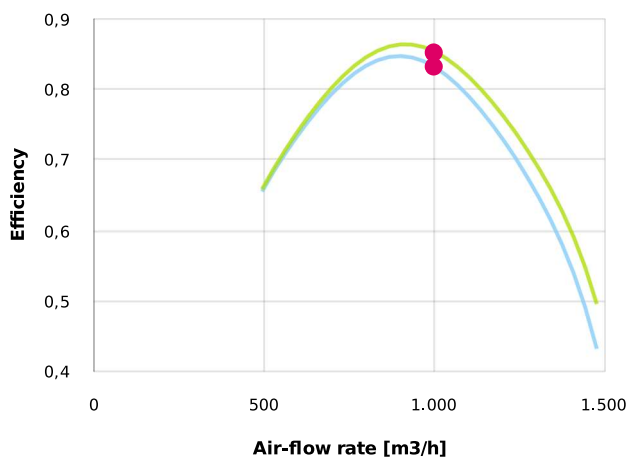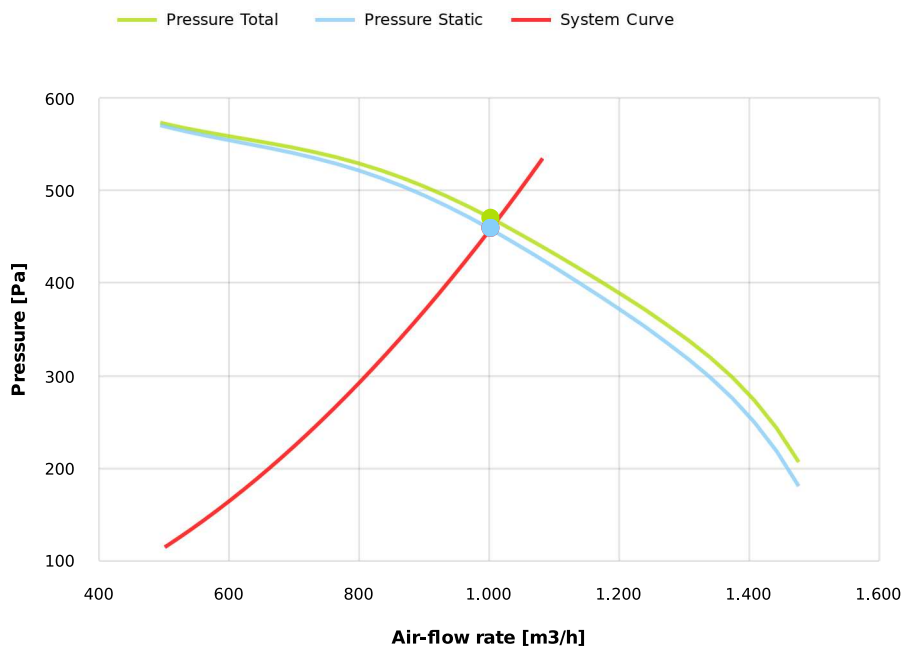

Dimensions

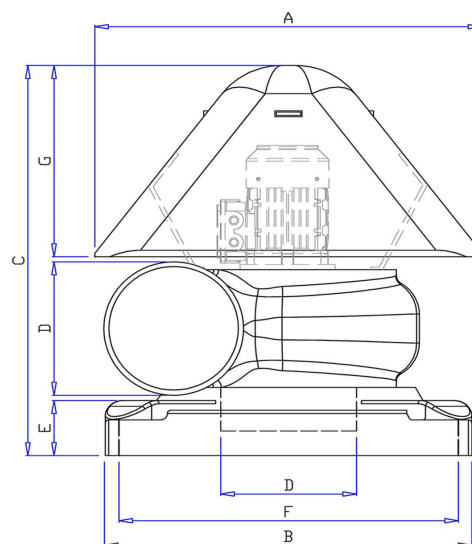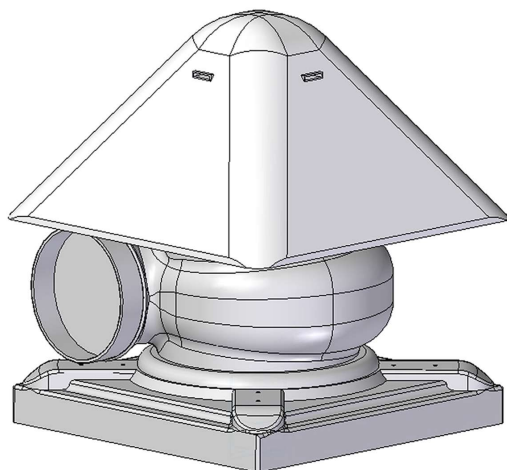

A	B	C	D	E	F	G
570	540	580	200	85	500	320

Configurations & cad

LG 0°

