


Research Data

Air-flow rate[m ³ /h]	499.4
Pressure[Pa]	108
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO224
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	16
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.12
IP	55
INS	


P-CO224

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





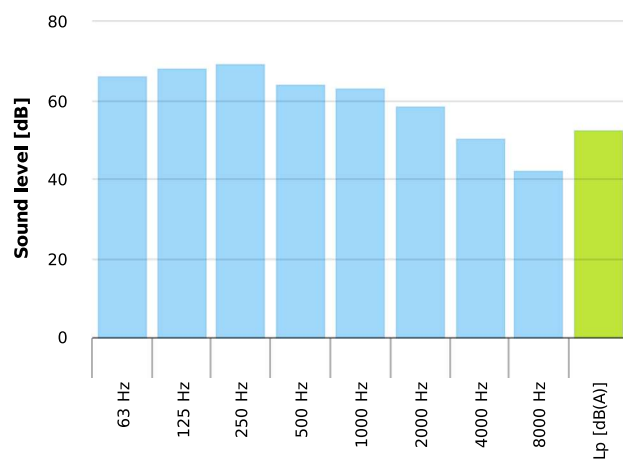


Table engines



Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m ³ /h]	499.4
P _{sta} [Pa]	108.0
P _{tot} [Pa]	111.0
P _{in} [kW] [W]	18.11
n _{sta}	0.825
n _{tot}	0.848
Rpm	1370

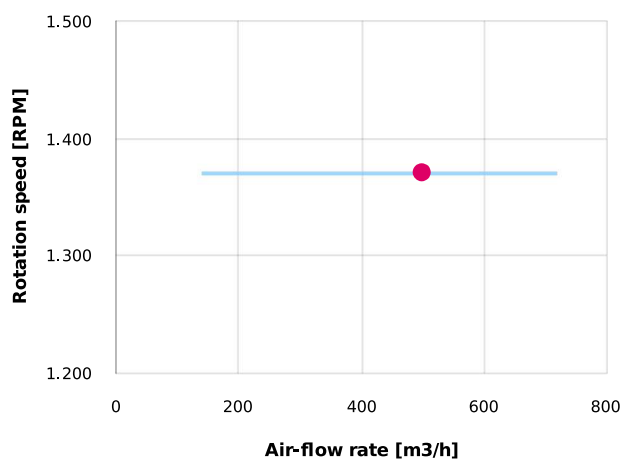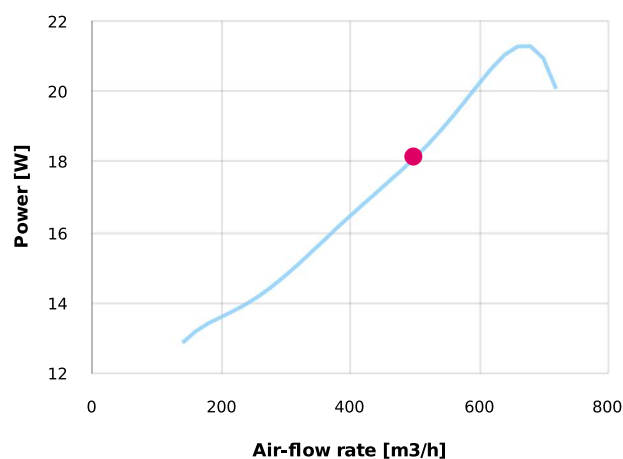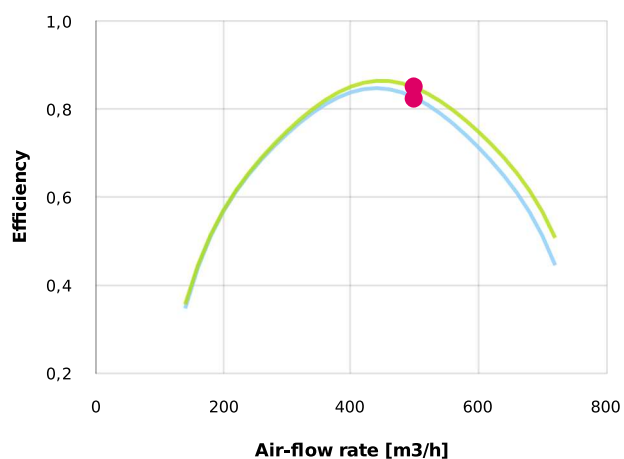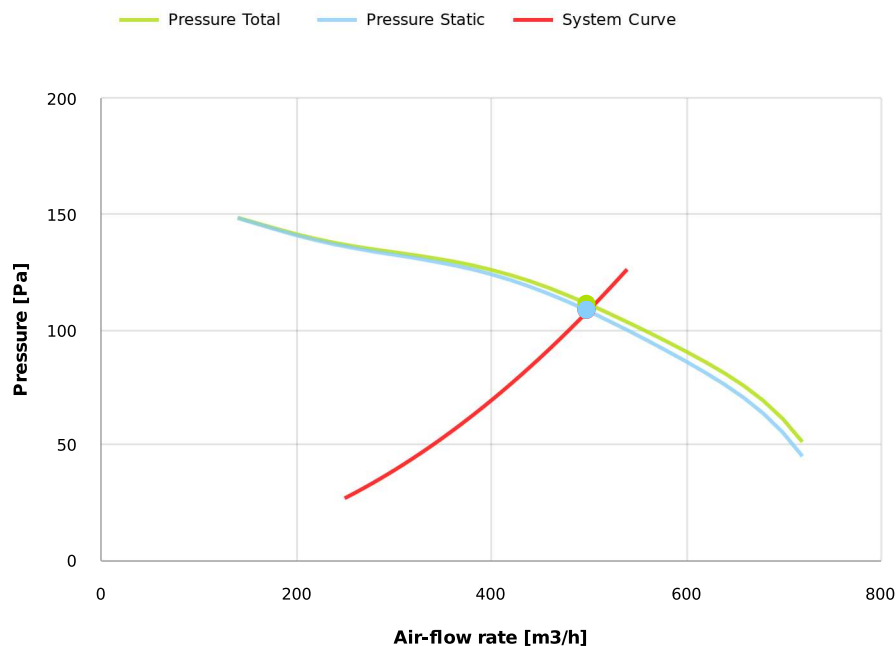

Dimensions

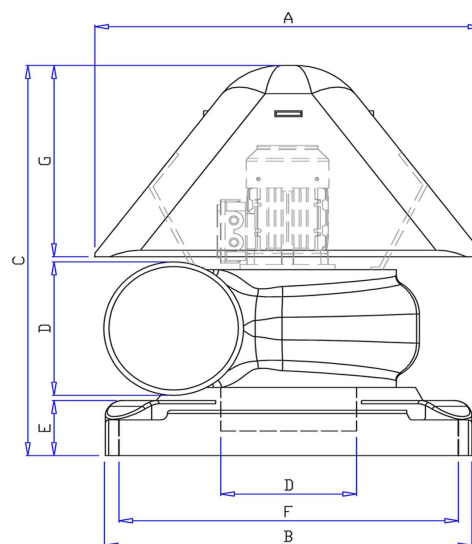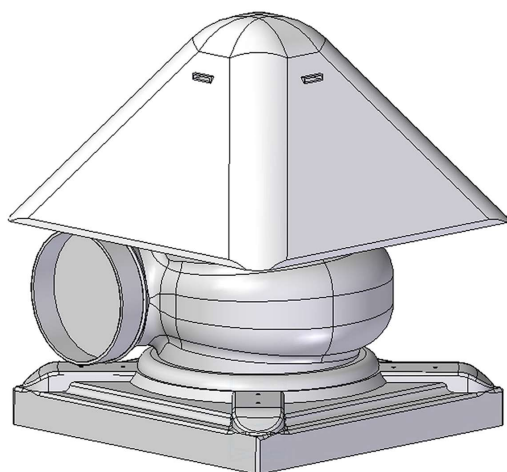

A	B	C	D	E	F	G
570	540	580	200	85	500	320

Configurations & cad

LG 0°

