


Research Data

Air-flow rate[m ³ /h]	1327
Pressure[Pa]	580.4
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO252ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	26
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	0.37
IP	55
INS	


P-CO252ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





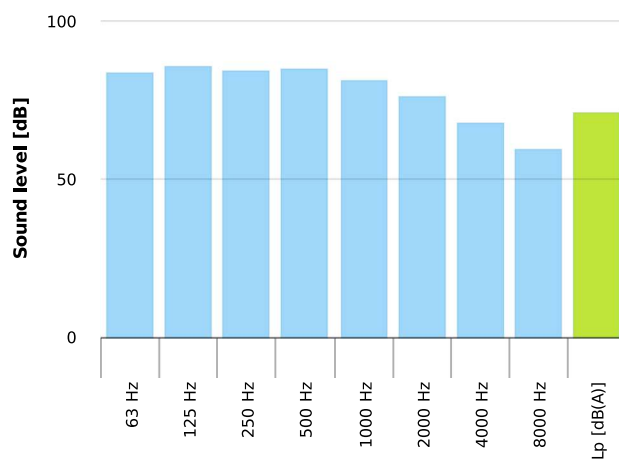


Table engines



Class IE	IE1
Size	63
Power[kW]	0.37
Current[A]	1.05
Voltage[V]	400
Cos φ	0.78
n	0.65

Working point

Q [m³/h]	1327
P_{sta} [Pa]	580.4
P_{tot} [Pa]	601.5
P_{in} [kW] [W]	276.8
n_{sta}	0.781
n_{tot}	0.808
Rpm	2800

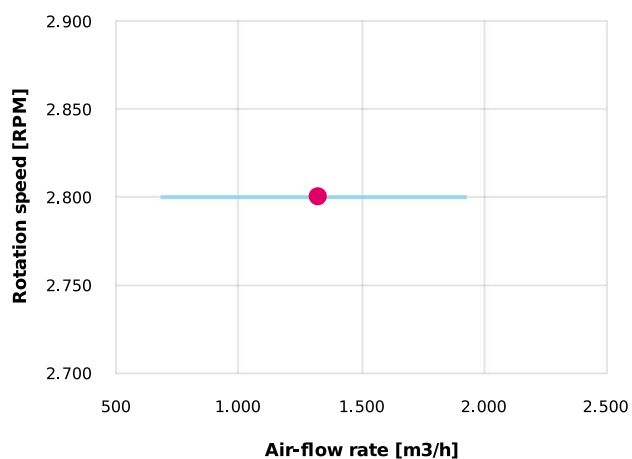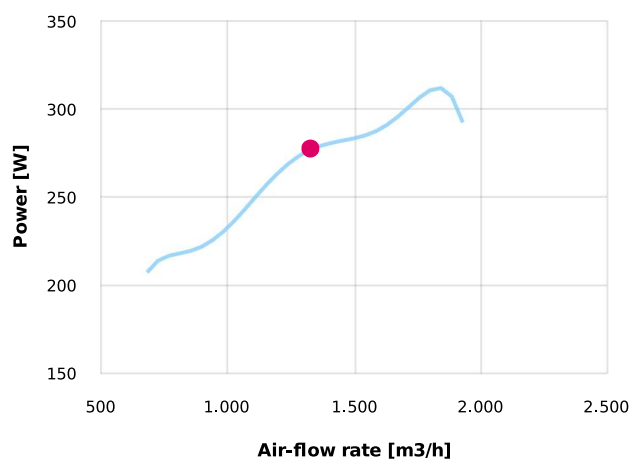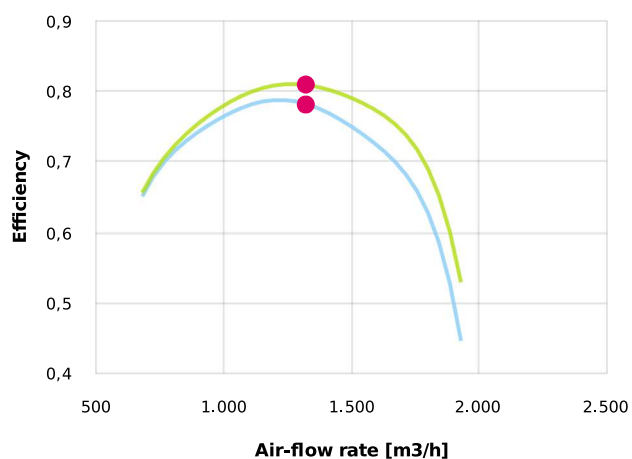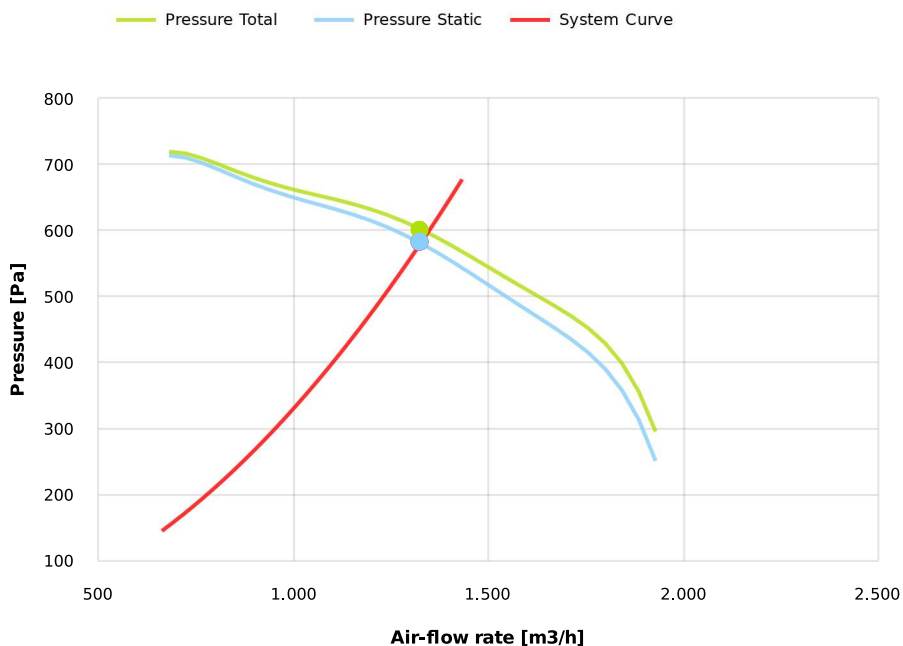

Dimensions

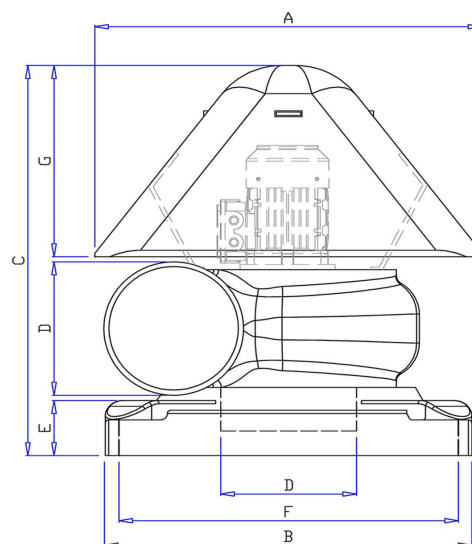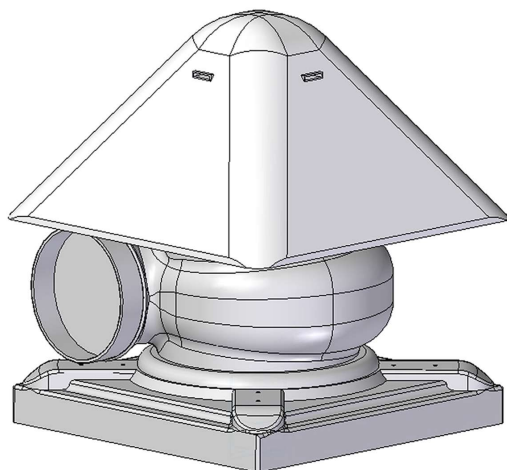

A	B	C	D	E	F	G
570	540	580	200	85	500	320

Configurations & cad

LG 0°

