


Research Data

Air-flow rate[m ³ /h]	712.6
Pressure[Pa]	127.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO254
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	16
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.12
IP	55
INS	


P-CO254

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





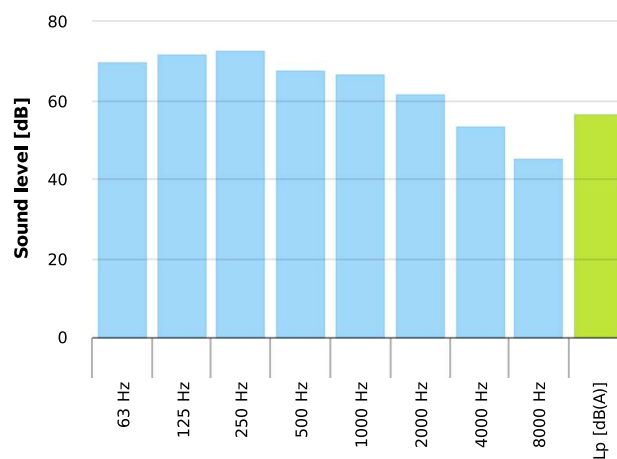


Table engines



Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57

Working point

Q [m³/h]	712.6
P_{sta} [Pa]	127.5
P_{tot} [Pa]	133.5
P_{in} [kW] [W]	33.02
n_{sta}	0.759
n_{tot}	0.796
Rpm	1370

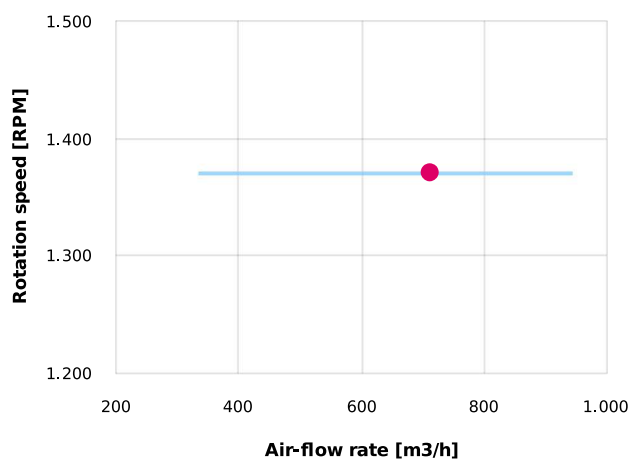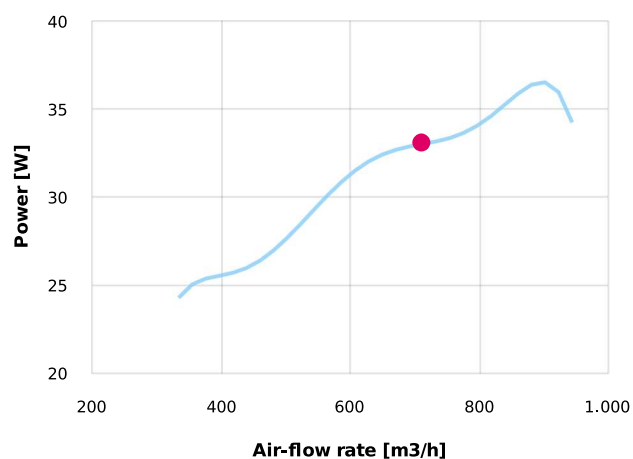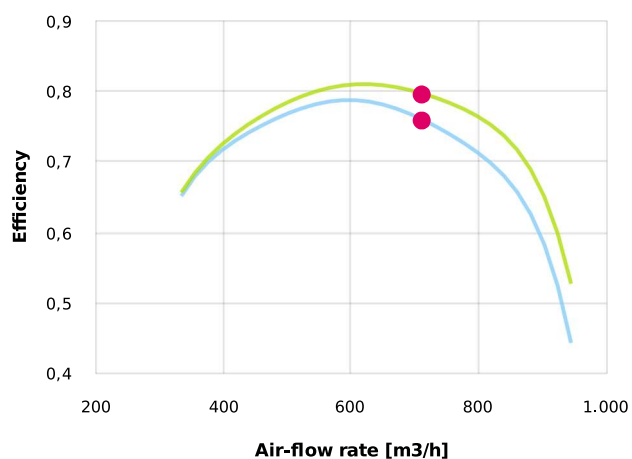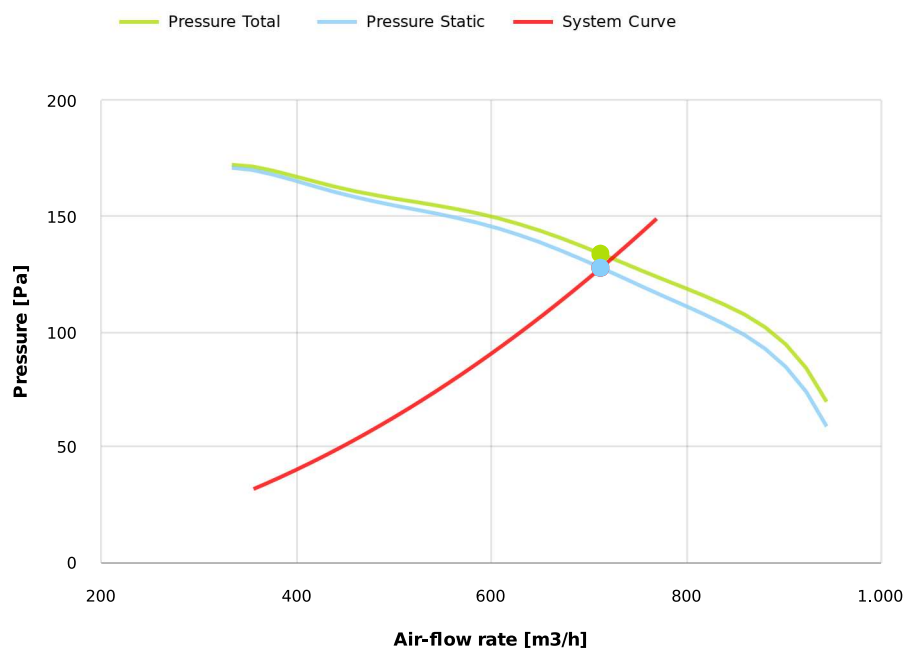

Dimensions

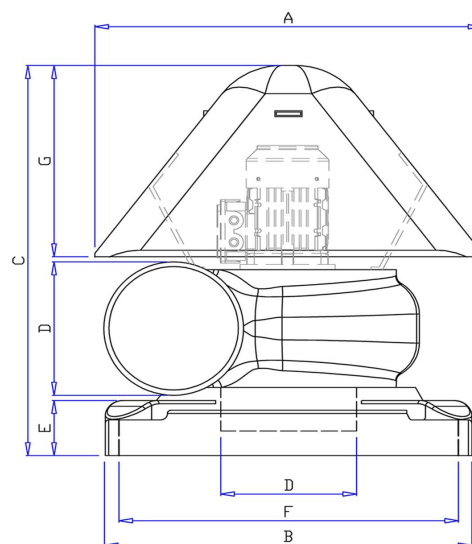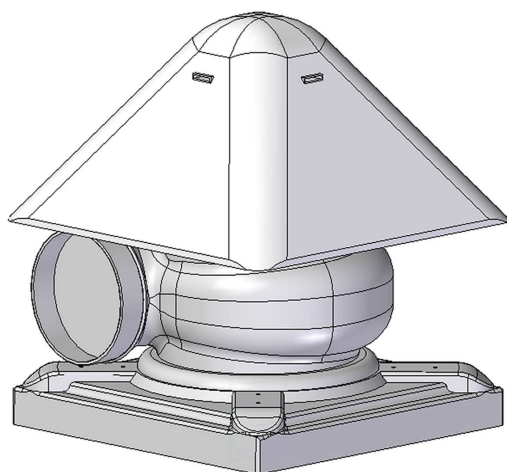

A	B	C	D	E	F	G
570	540	580	200	85	500	320

Configurations & cad

LG 0°

