


Research Data

Air-flow rate[m ³ /h]	1957
Pressure[Pa]	800.6
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO282ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	39
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	0.75
IP	55
INS	



P-CO282ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





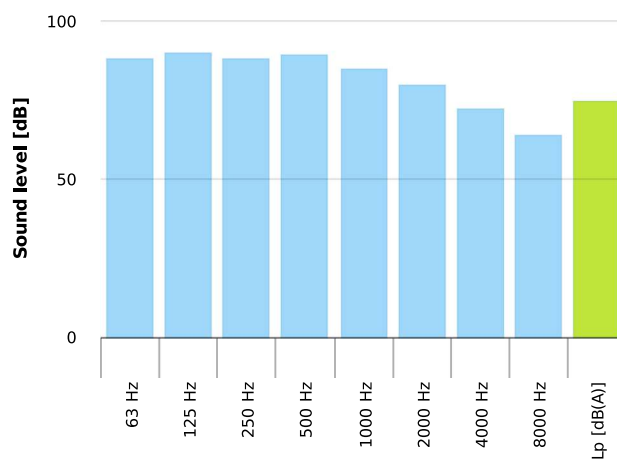


Table engines



Class IE	IE1	IE2	IE3
Size	80	80	80
Power[kW]	0.75	0.75	0.75
Current[A]	1.83	1.73	1.7
Voltage[V]	400	400	400
Cos φ	0.82	0.81	0.81
n	0.72	0.774	0.807

Working point

Q [m ³ /h]	1957
P _{sta} [Pa]	800.6
P _{tot} [Pa]	829.3
P _{in} [kW] [W]	542.4
n _{sta}	0.802
n _{tot}	0.831
Rpm	2850

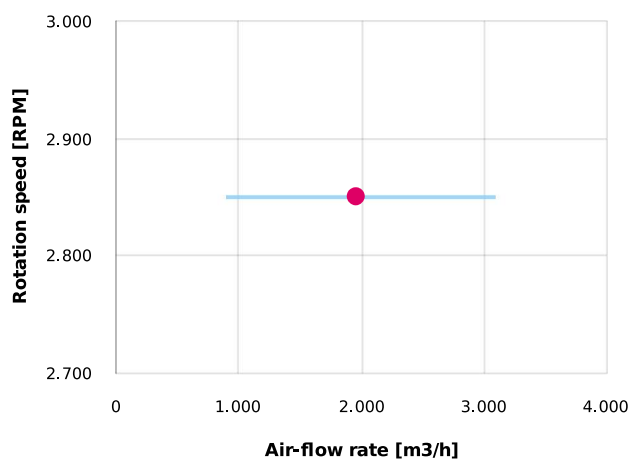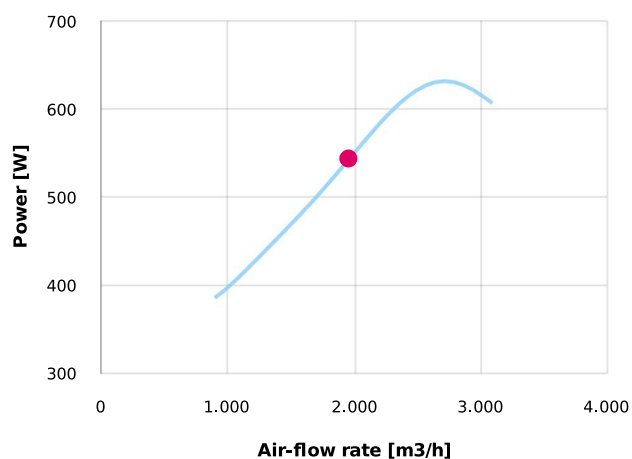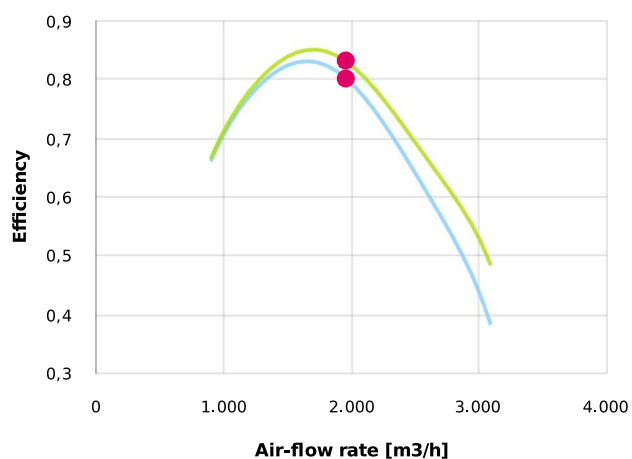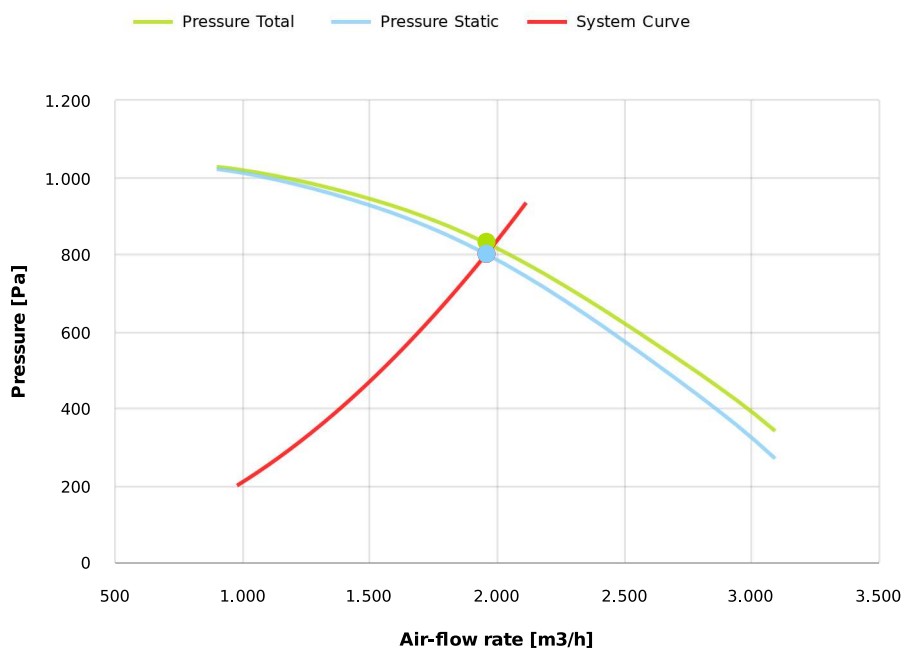

Dimensions

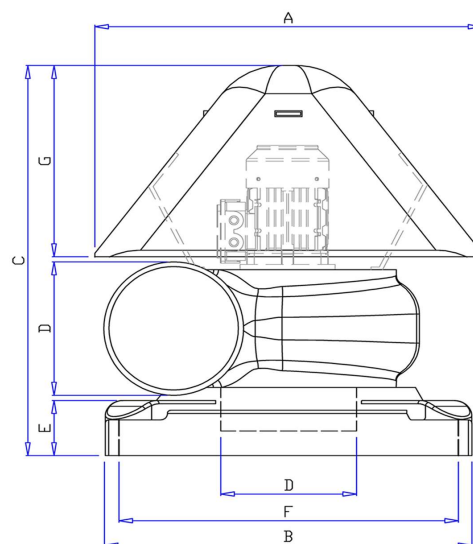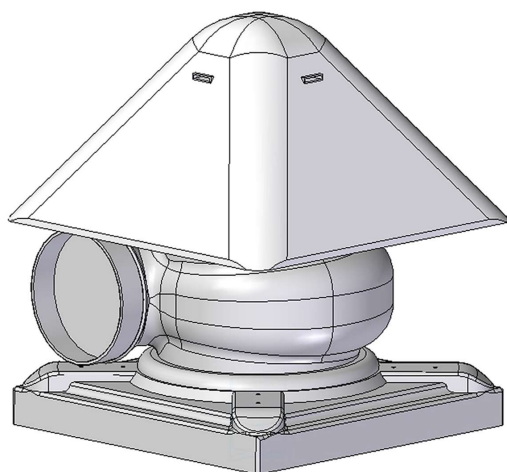

A	B	C	D	E	F	G
570	540	600	225	85	500	320

Configurations & cad

LG 0°

