


Research Data

Air-flow rate[m ³ /h]	1086
Pressure[Pa]	157.7
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO284
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	20
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.18
IP	55
INS	


P-CO284

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





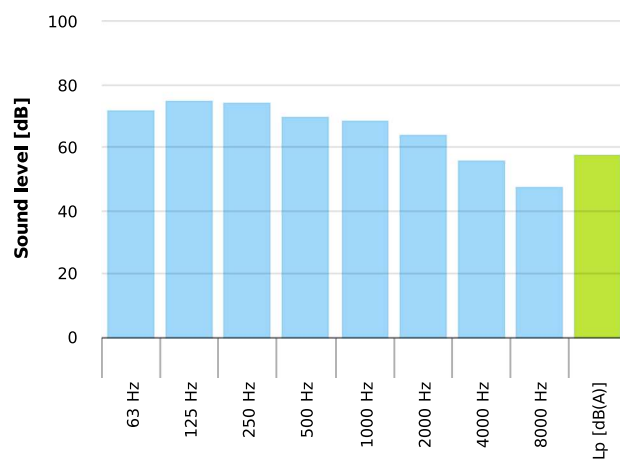


Table engines



Class IE	IE1
Size	63
Power[kW]	0.18
Current[A]	0.68
Voltage[V]	400
Cos φ	0.65
n	0.59

Working point

Q [m ³ /h]	1086
P _{sta} [Pa]	157.7
P _{tot} [Pa]	166.5
P _{in} [kW] [W]	65.78
n _{sta}	0.723
n _{tot}	0.764
Rpm	1370

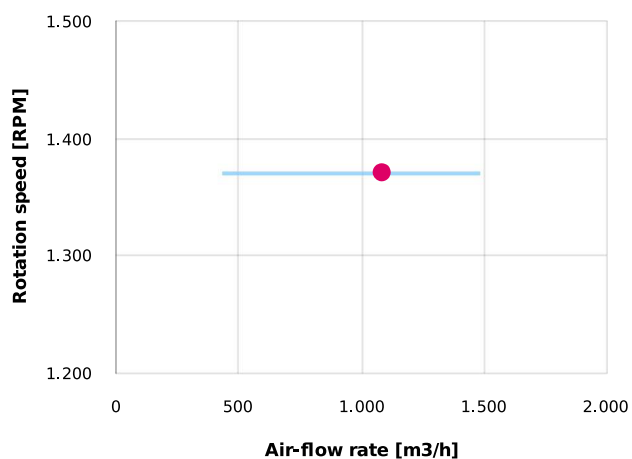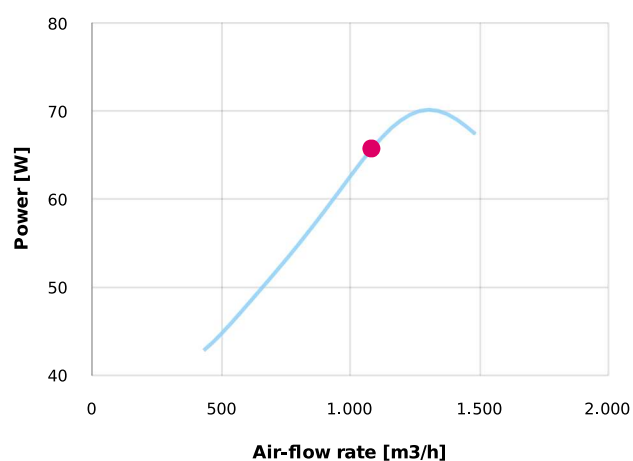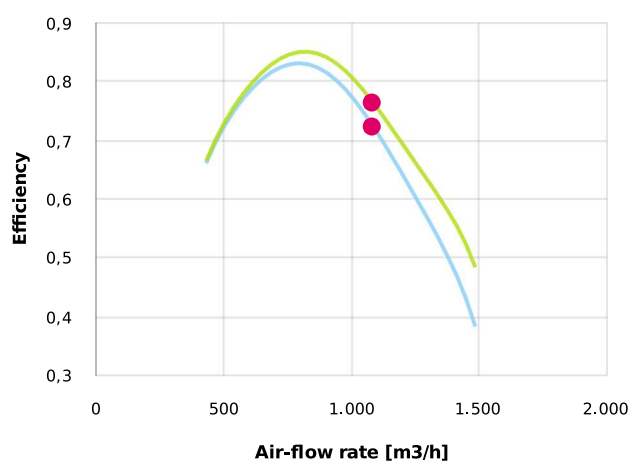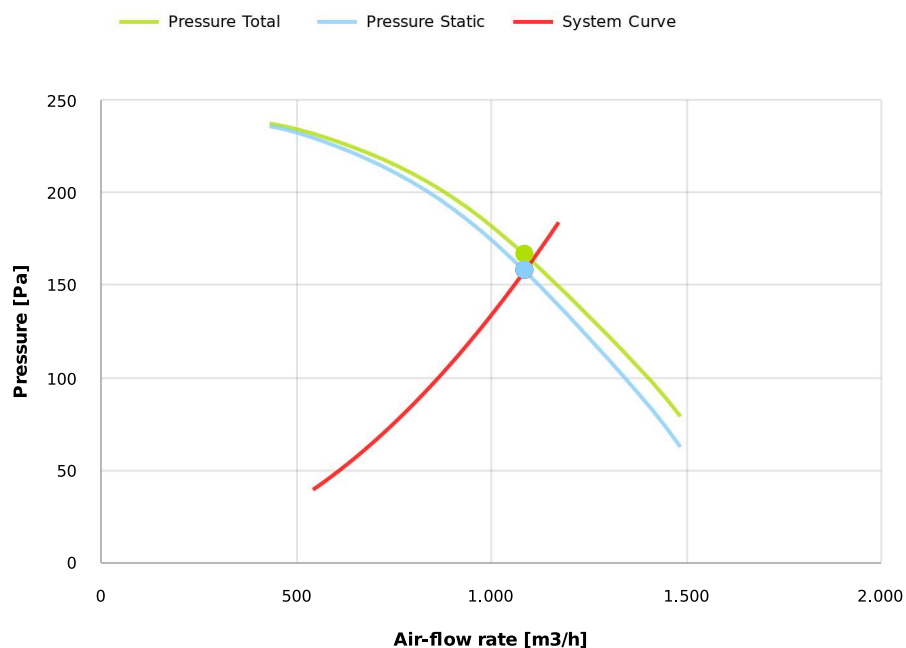

Dimensions

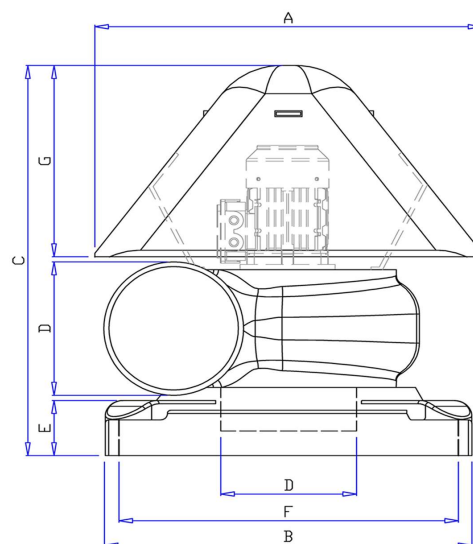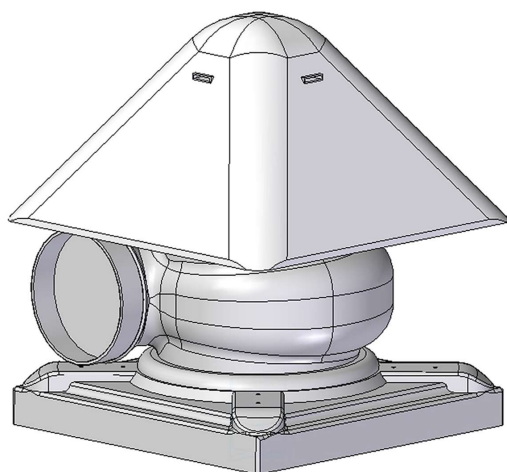

A	B	C	D	E	F	G
570	540	600	225	85	500	320

Configurations & cad

LG 0°

