


Research Data

Air-flow rate[m ³ /h]	2750
Pressure[Pa]	1015
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO312ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	51
Frequency[Hz]	50
Speed[rpm]	2850
Power[kW]	1.5
IP	55
INS	


P-CO312ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





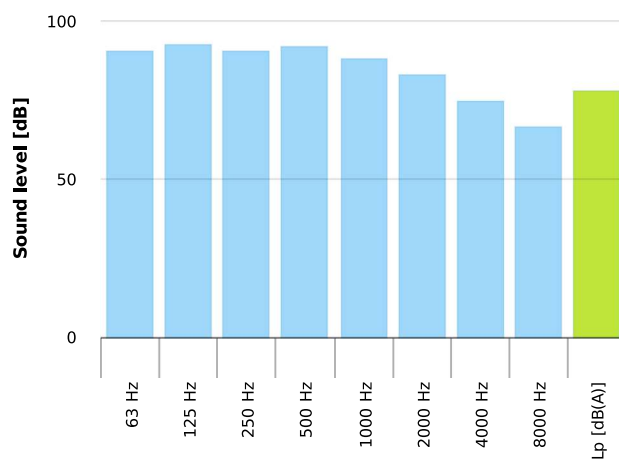


Table engines



Class IE	IE1	IE2	IE3
Size	90S	90S	90S
Power[kW]	1.5	1.5	1.5
Current[A]	3.32	3.21	3.1
Voltage[V]	400	400	400
Cos φ	0.83	0.83	0.82
n	0.785	0.813	0.842

Working point

Q [m ³ /h]	2750
P _{sta} [Pa]	1015
P _{tot} [Pa]	1052
P _{in} [kW] [W]	956.8
n _{sta}	0.813
n _{tot}	0.842
Rpm	2850

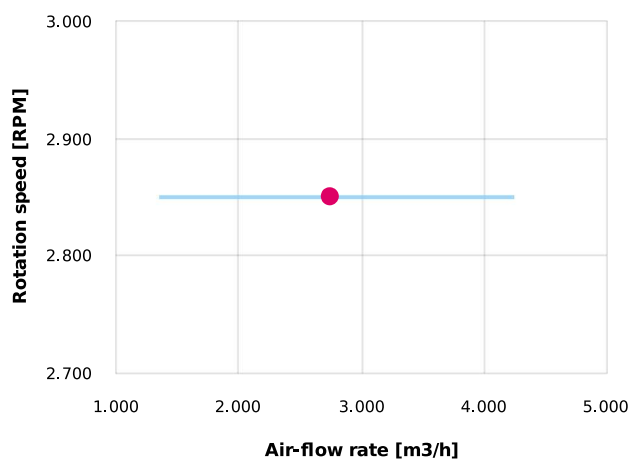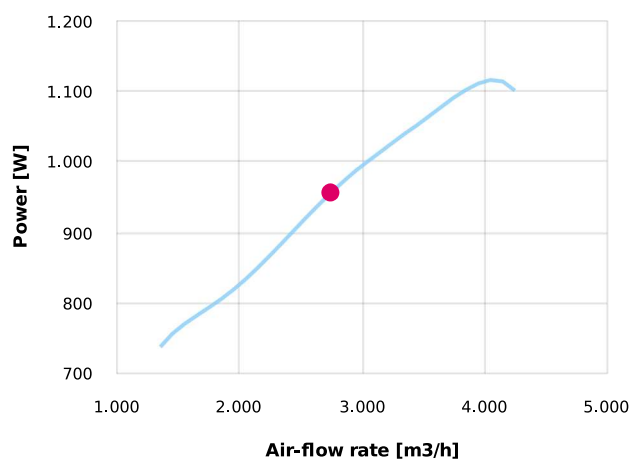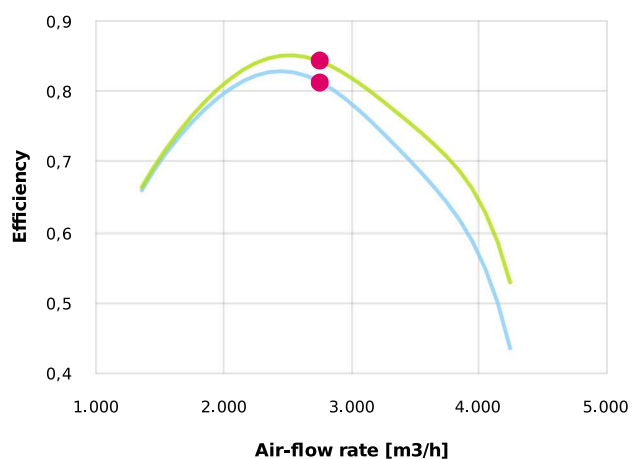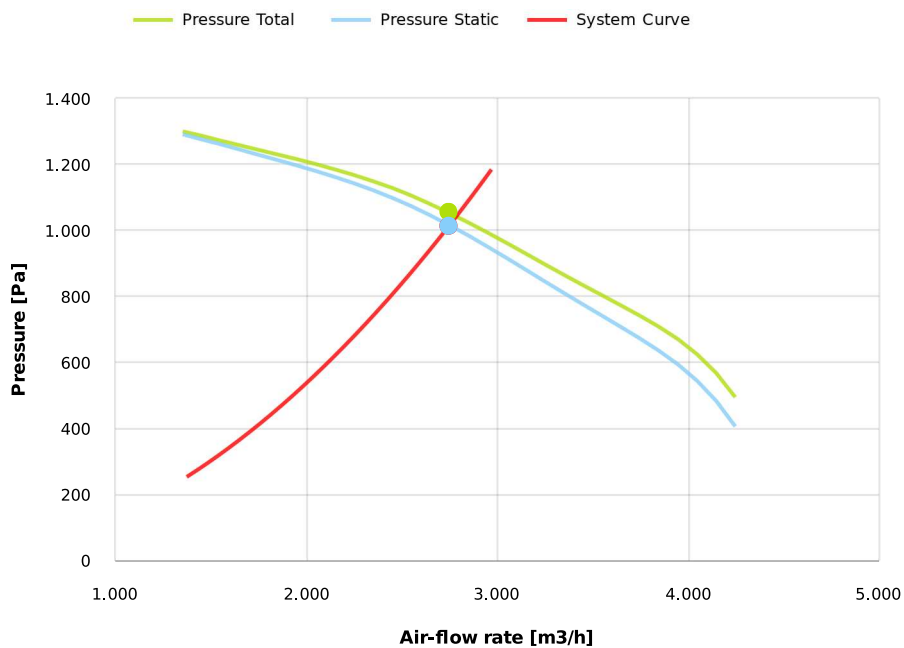

Dimensions

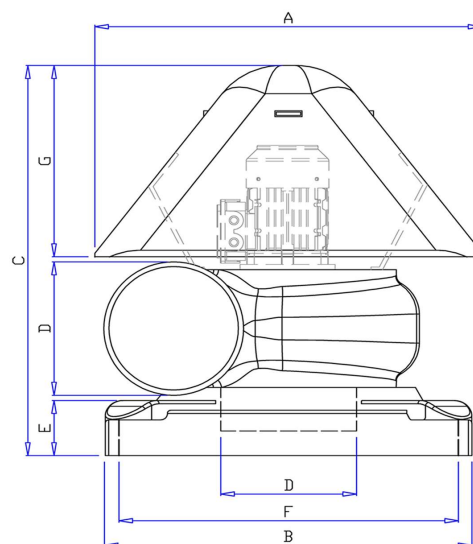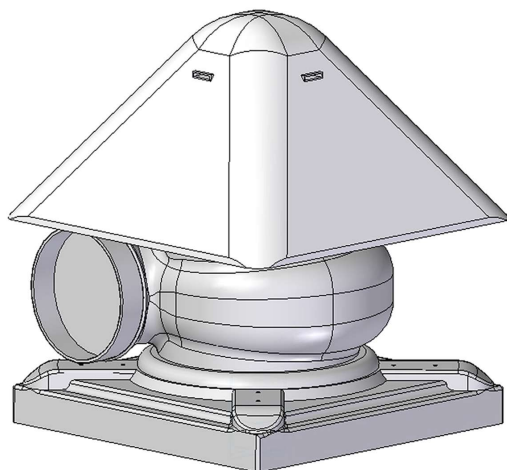

A	B	C	D	E	F	G
660	540	610	250	85	500	360

Configurations & cad

LG 0°

