


Research Data

Air-flow rate[m ³ /h]	1351
Pressure[Pa]	245
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO314ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	36
Frequency[Hz]	50
Speed[rpm]	1400
Power[kW]	0.25
IP	55
INS	


P-CO314ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





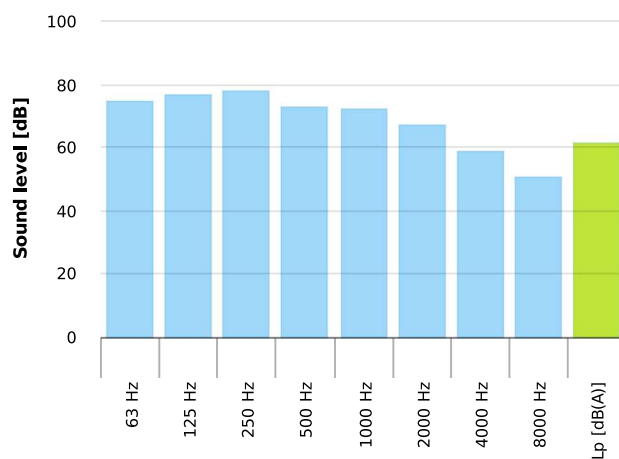


Table engines



Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.84
Voltage[V]	400
Cos φ	0.72
n	0.6

Working point

Q [m ³ /h]	1351
P _{sta} [Pa]	245.0
P _{tot} [Pa]	254.0
P _{in} [kW] [W]	113.4
n _{sta}	0.813
n _{tot}	0.843
Rpm	1400

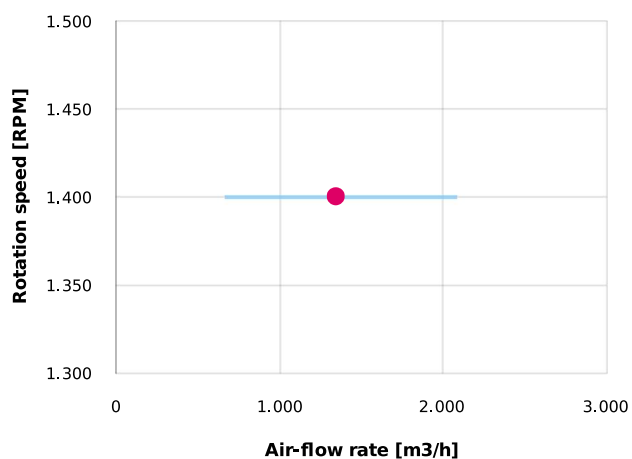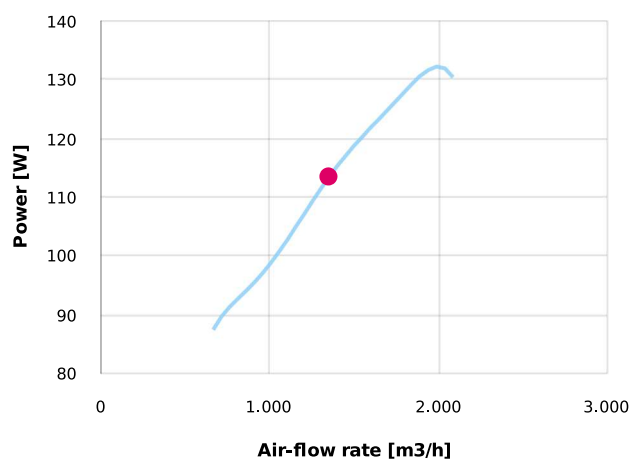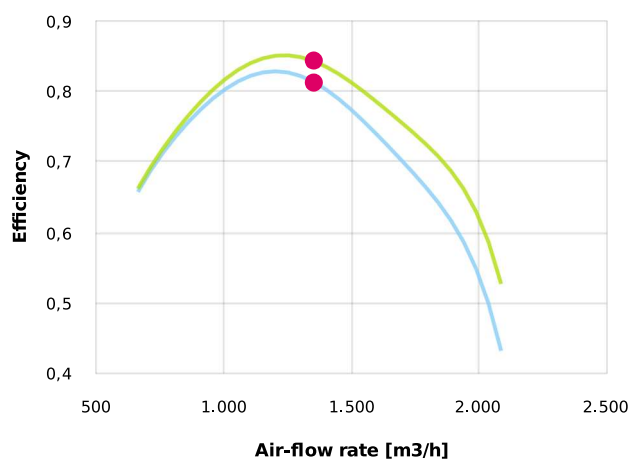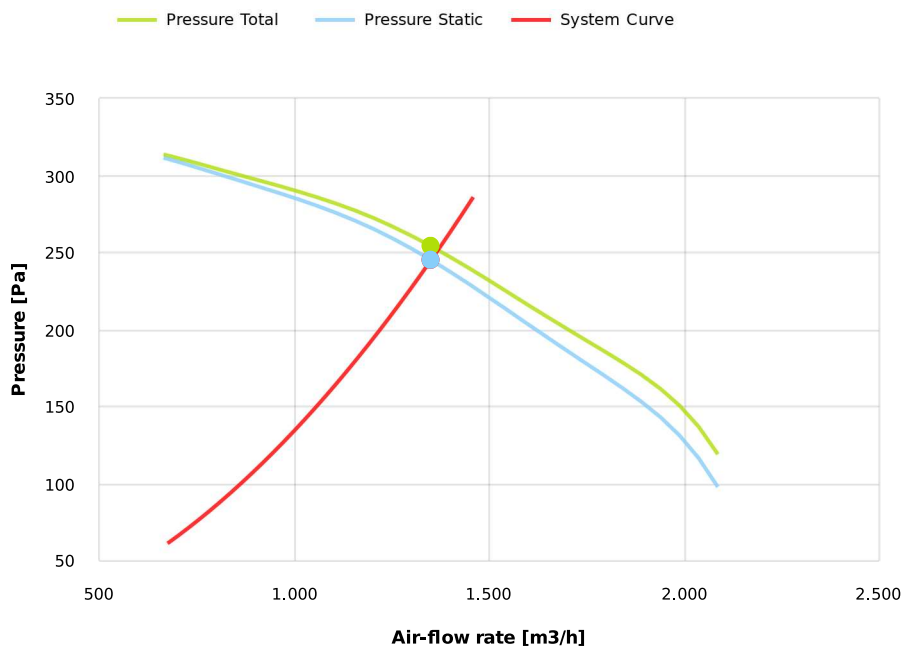

Dimensions

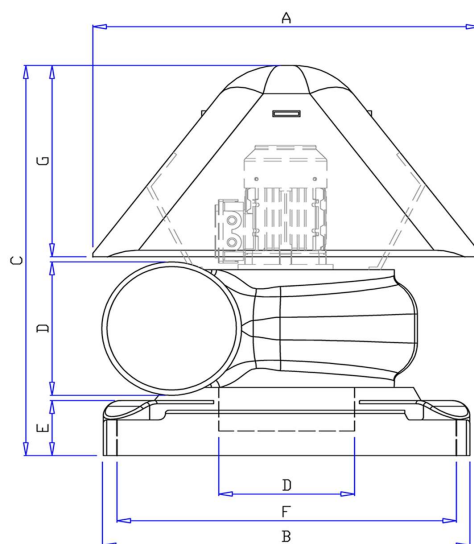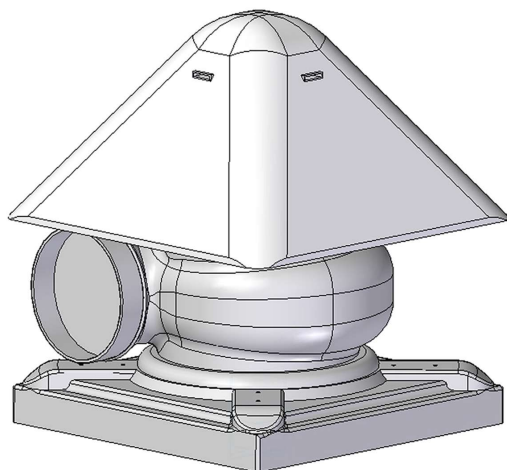

A	B	C	D	E	F	G
660	540	610	250	85	500	360

Configurations & cad

LG 0°

