


Research Data

Air-flow rate[m ³ /h]	897.4
Pressure[Pa]	108.1
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO316ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	36
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	



P-CO316ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





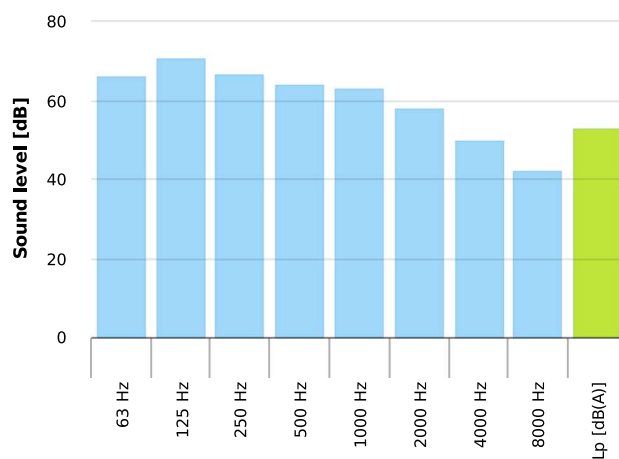


Table engines



Class IE	IE1
Size	71
Power[kW]	0.18
Current[A]	0.7
Voltage[V]	400
Cos φ	0.66
n	0.56

Working point

Q [m ³ /h]	897.4
P _{sta} [Pa]	108.1
P _{tot} [Pa]	112.1
P _{in} [kW] [W]	33.25
n _{sta}	0.813
n _{tot}	0.843
Rpm	930

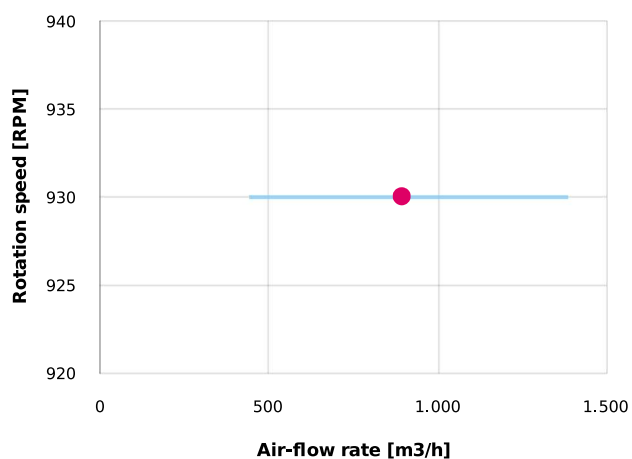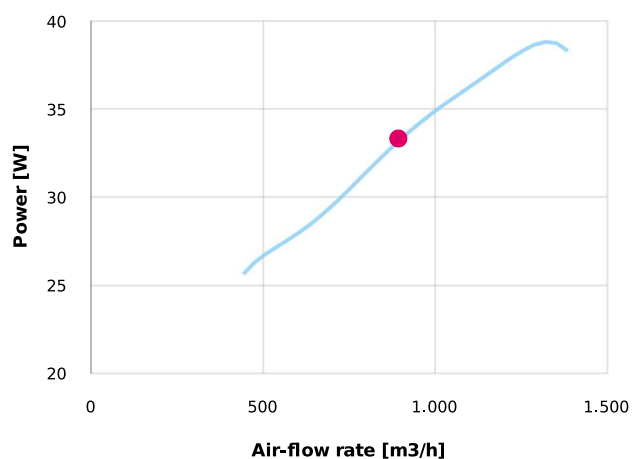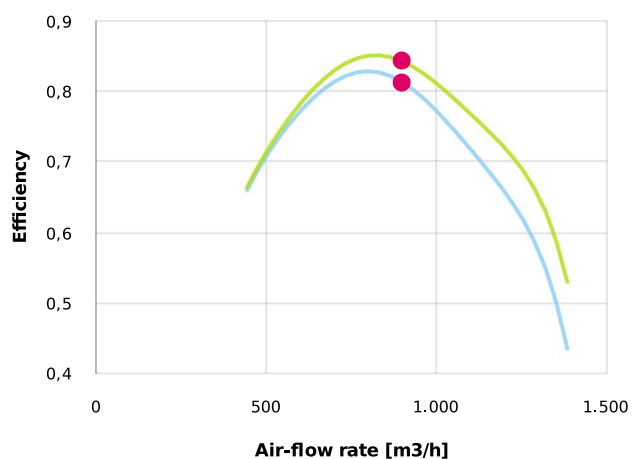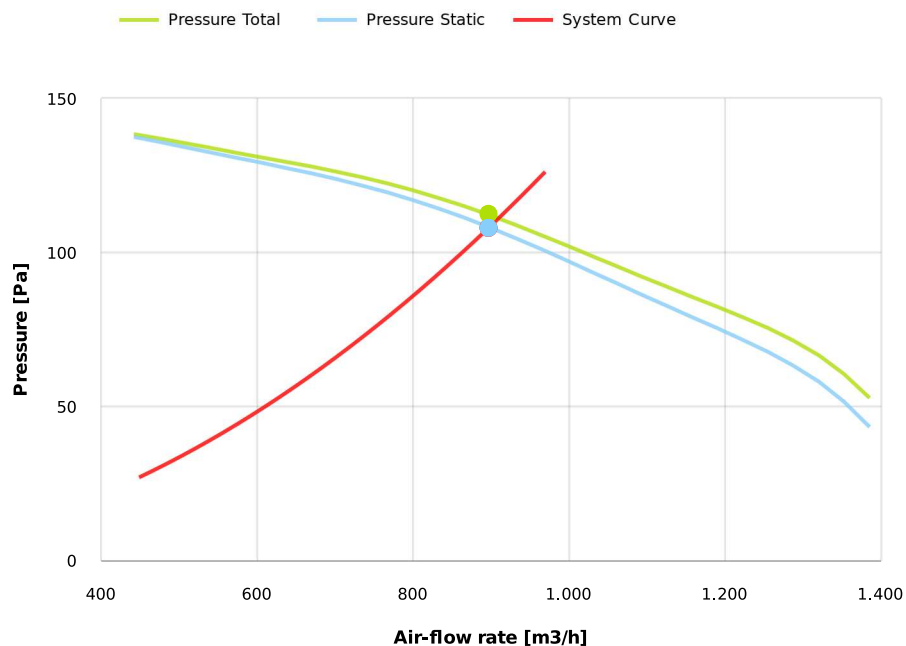

Dimensions

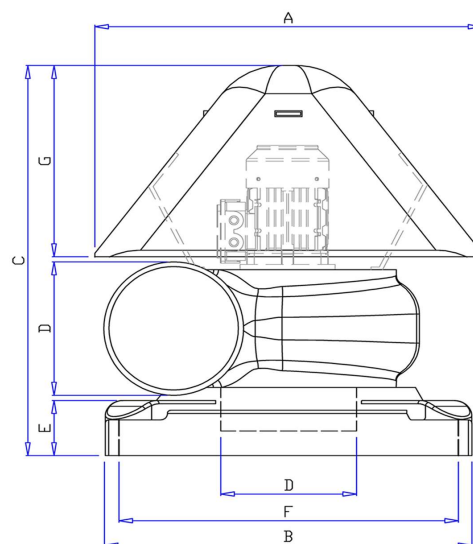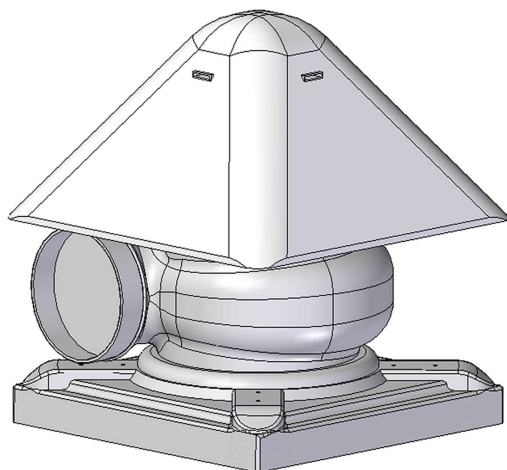

A	B	C	D	E	F	G
660	540	610	250	85	500	360

Configurations & cad

LG 0°

