


## Research Data

|                                  |       |
|----------------------------------|-------|
| Air-flow rate[m <sup>3</sup> /h] | 995   |
| Pressure[Pa]                     | 97.56 |
| Pressure Type                    | Psta  |
| Power supply                     | all   |
| Density[m <sup>3</sup> /h]       | 1.205 |

## Label

|               |         |
|---------------|---------|
| Code          | P-CO316 |
| Voltage[V]    | 400     |
| Phases        | 3       |
| Current[A]    |         |
| Poles         | 6       |
| Weight[kg]    | 25      |
| Frequency[Hz] | 50      |
| Speed[rpm]    | 930     |
| Power[kW]     | 0.18    |
| IP            | 55      |
| INS           |         |


**P-CO316**

Pe moulded housing - PP moulded impeller - PE base-  
ABS protection cap - stainless steel screws

## Certificazioni








## Table engines



|            |      |
|------------|------|
| Class IE   | IE1  |
| Size       | 71   |
| Power[kW]  | 0.18 |
| Current[A] | 0.7  |
| Voltage[V] | 400  |
| Cos φ      | 0.66 |
| n          | 0.56 |

## Working point

|                          |       |
|--------------------------|-------|
| Q [m <sup>3</sup> /h]    | 995   |
| P <sub>sta</sub> [Pa]    | 97.56 |
| P <sub>tot</sub> [Pa]    | 102.4 |
| P <sub>in</sub> [kW] [W] | 34.81 |
| n <sub>sta</sub>         | 0.774 |
| n <sub>tot</sub>         | 0.813 |
| Rpm                      | 930   |

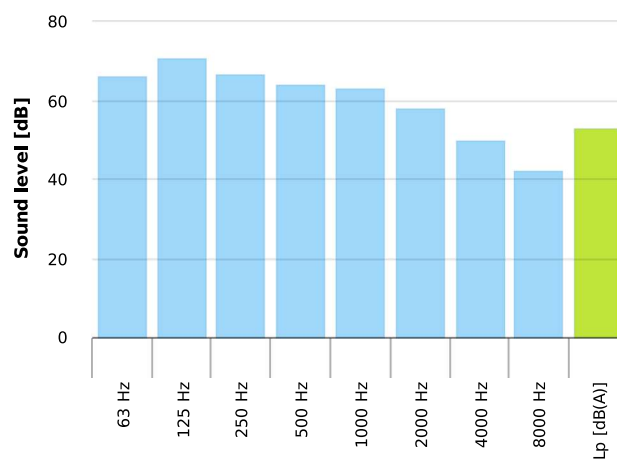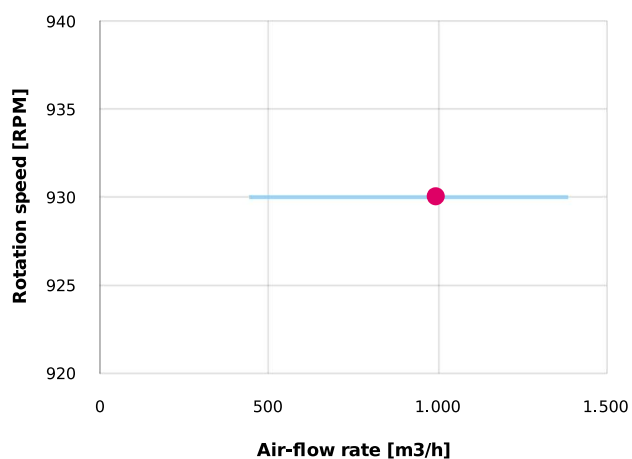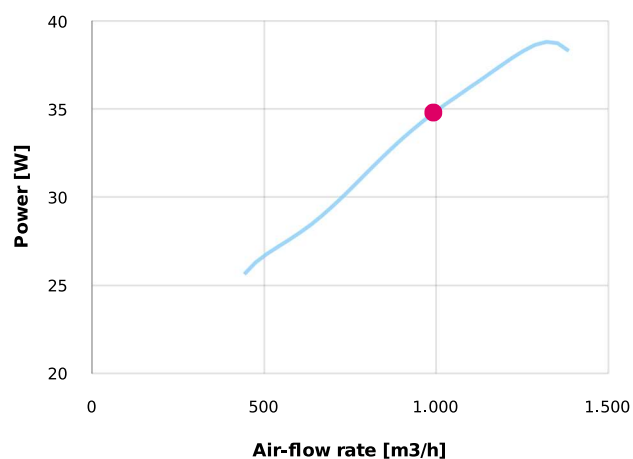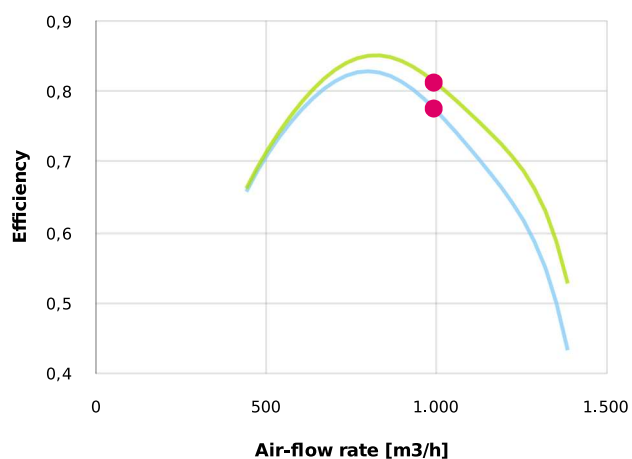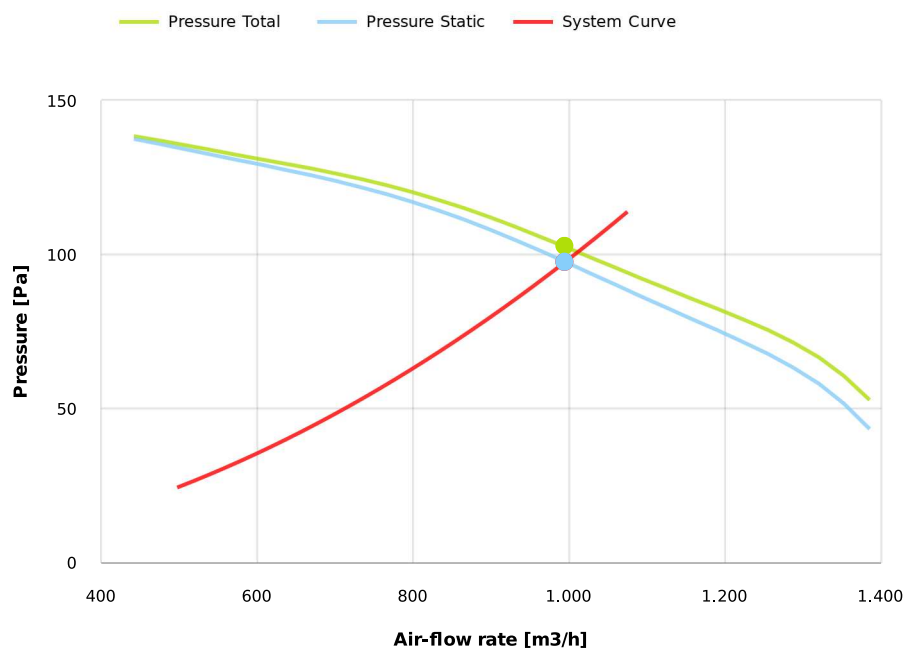

## Dimensions

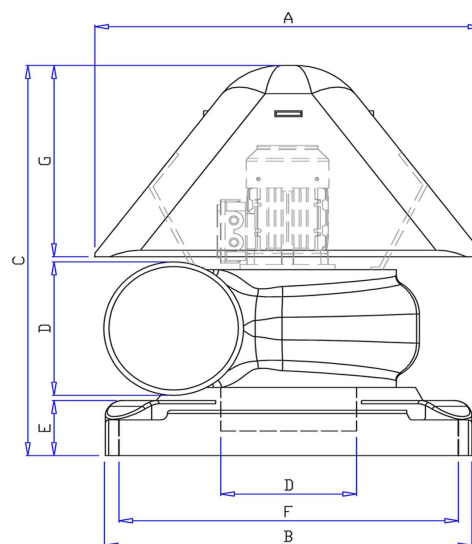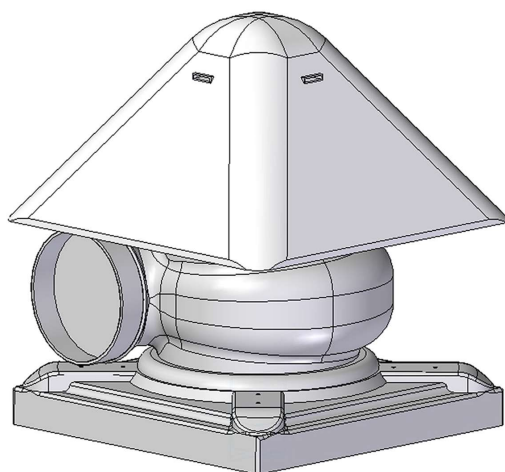

| A   | B   | C   | D   | E  | F   | G   |
|-----|-----|-----|-----|----|-----|-----|
| 660 | 540 | 610 | 250 | 85 | 500 | 360 |

## Configurations & cad

LG 0°

