


Research Data

Air-flow rate[m ³ /h]	2220
Pressure[Pa]	280.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO354
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	29
Frequency[Hz]	50
Speed[rpm]	1400
Power[kW]	0.37
IP	55
INS	


P-CO354

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





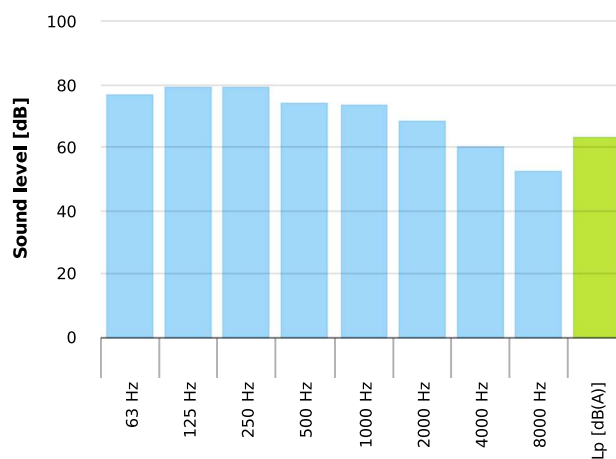


Table engines



Class IE	IE1
Size	71
Power[kW]	0.37
Current[A]	1.11
Voltage[V]	400
Cos φ	0.74
n	0.65

Working point

Q [m ³ /h]	2220
P _{sta} [Pa]	280.5
P _{tot} [Pa]	295.8
P _{in} [kW] [W]	229.6
n _{sta}	0.755
n _{tot}	0.795
Rpm	1400

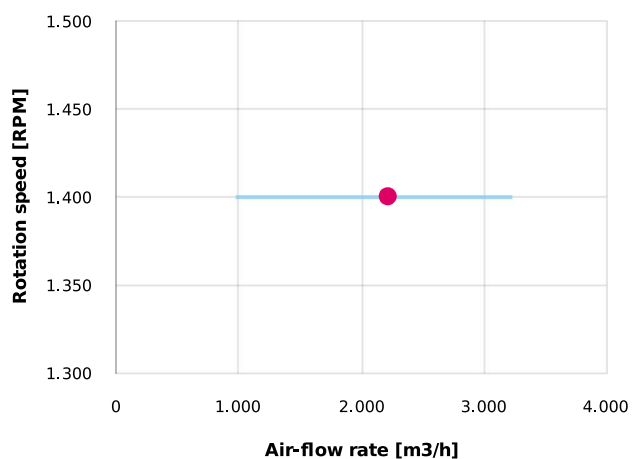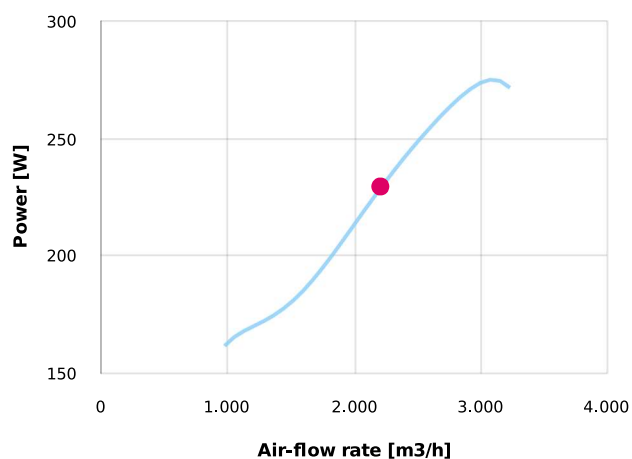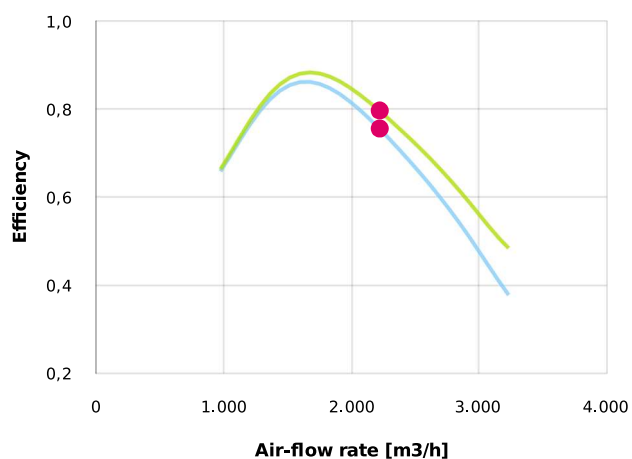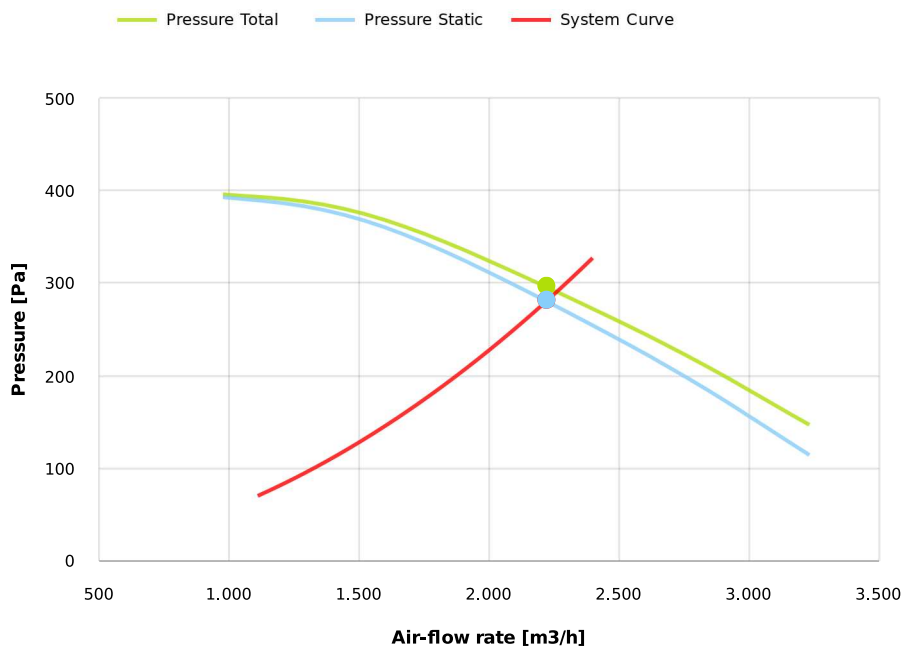

Dimensions

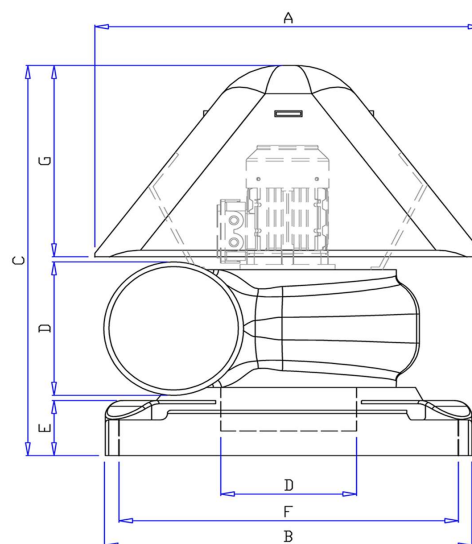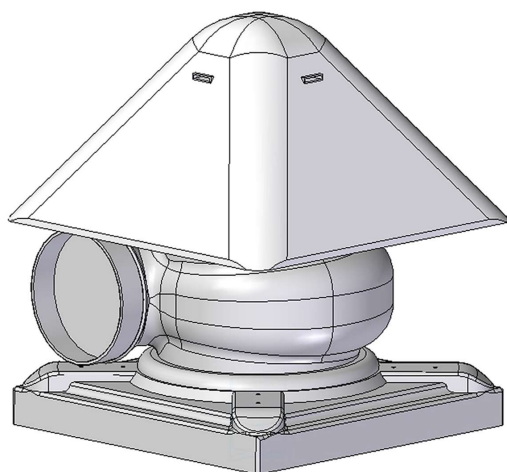

A	B	C	D	E	F	G
660	540	640	280	85	500	360

Configurations & cad

LG 0°

