


Research Data

Air-flow rate[m ³ /h]	1423
Pressure[Pa]	128.6
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO356ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	40
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	


P-CO356ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





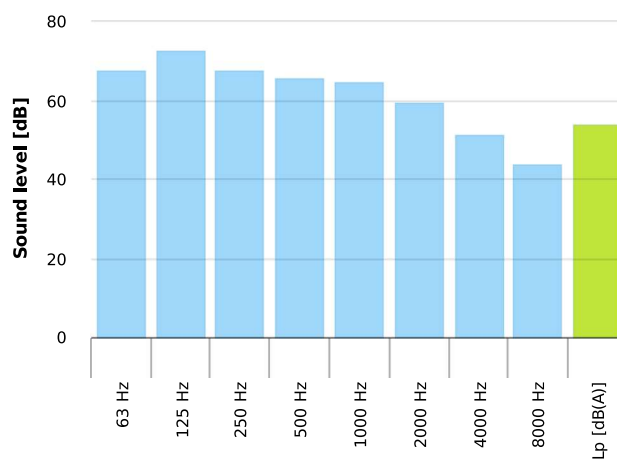


Table engines



Class IE	IE1
Size	71
Power[kW]	0.18
Current[A]	0.7
Voltage[V]	400
Cos φ	0.66
n	0.56

Working point

Q [m ³ /h]	1423
Psta [Pa]	128.6
Ptot [Pa]	134.9
Pin [kW] [W]	65.62
nsta	0.777
ntot	0.815
Rpm	930

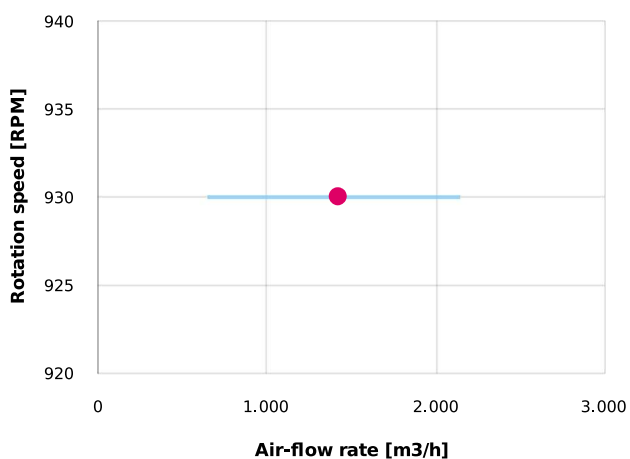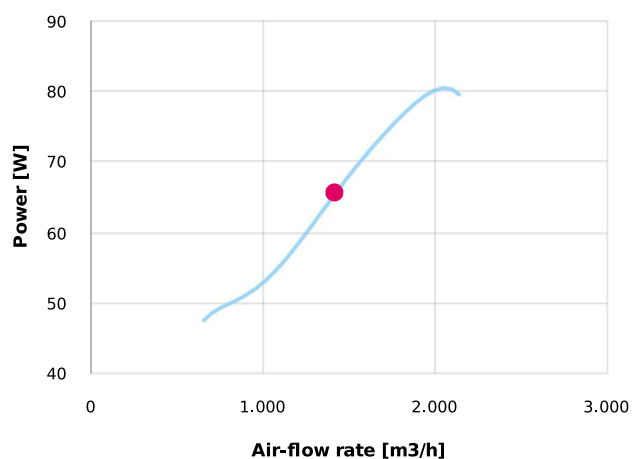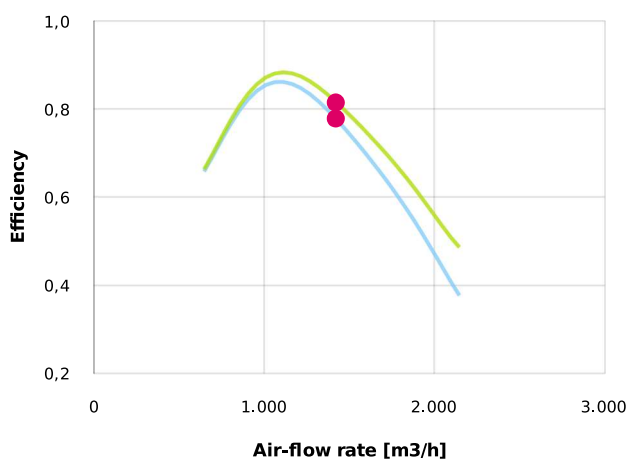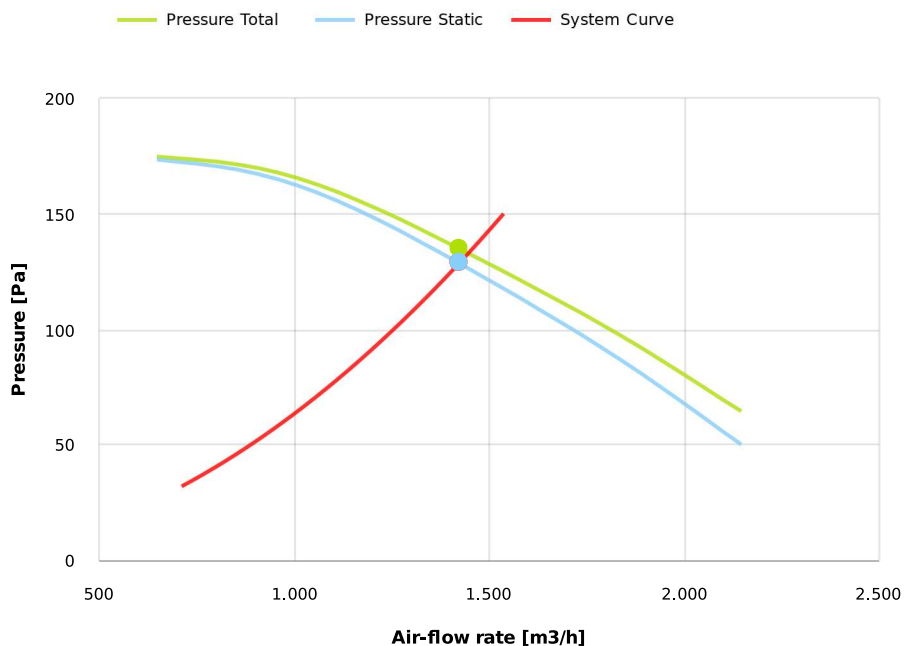

Dimensions

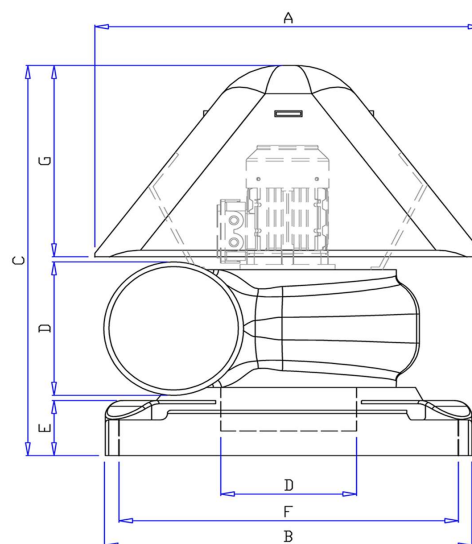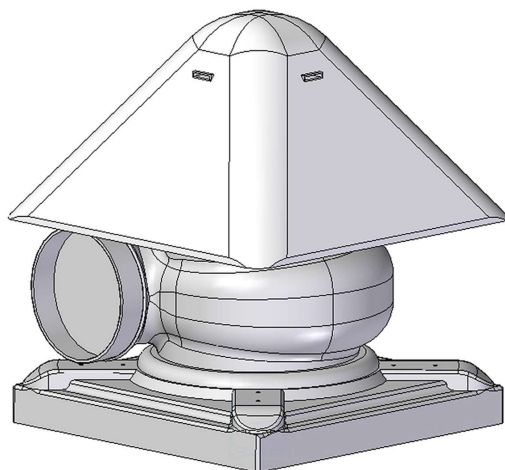

A	B	C	D	E	F	G
660	540	640	280	85	500	360

Configurations & cad

LG 0°

