


Research Data

Air-flow rate[m ³ /h]	1629
Pressure[Pa]	108.6
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO356
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	29
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	


P-CO356

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





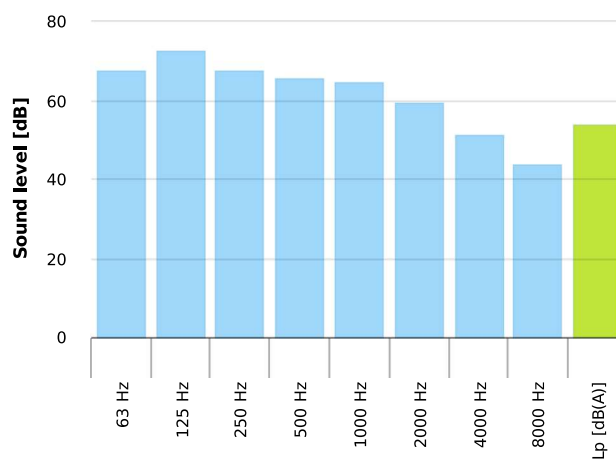


Table engines



Class IE	IE1
Size	71
Power[kW]	0.18
Current[A]	0.7
Voltage[V]	400
Cos φ	0.66
n	0.56

Working point

Q [m³/h]	1629
P_{sta} [Pa]	108.6
P_{tot} [Pa]	116.9
P_{in} [kW] [W]	71.90
n_{sta}	0.682
n_{tot}	0.735
Rpm	930

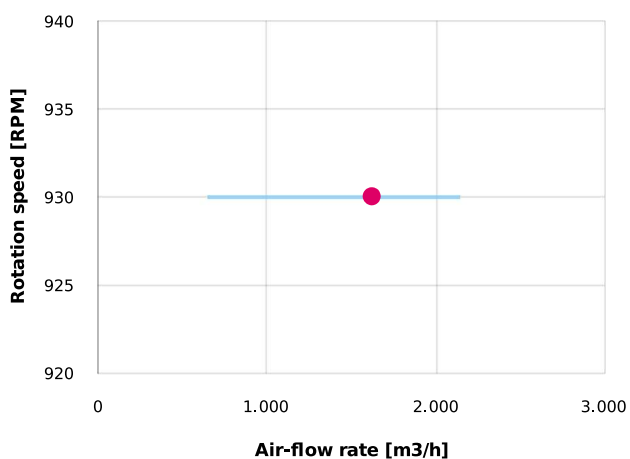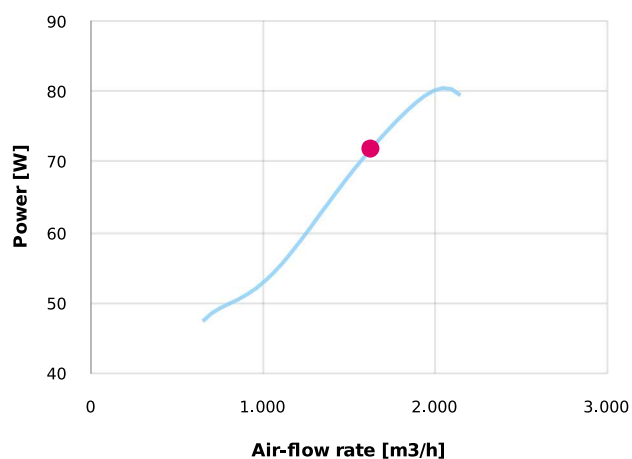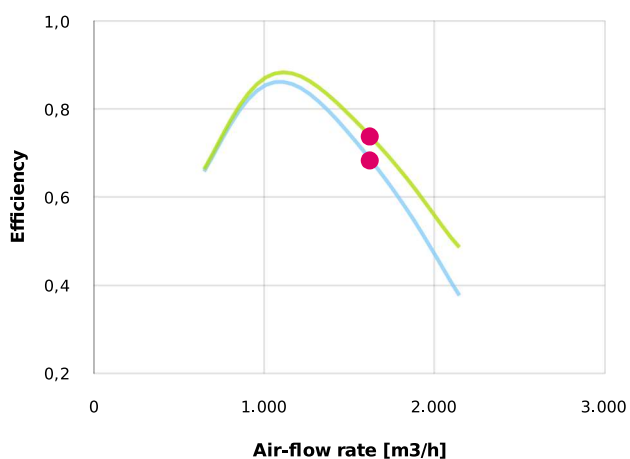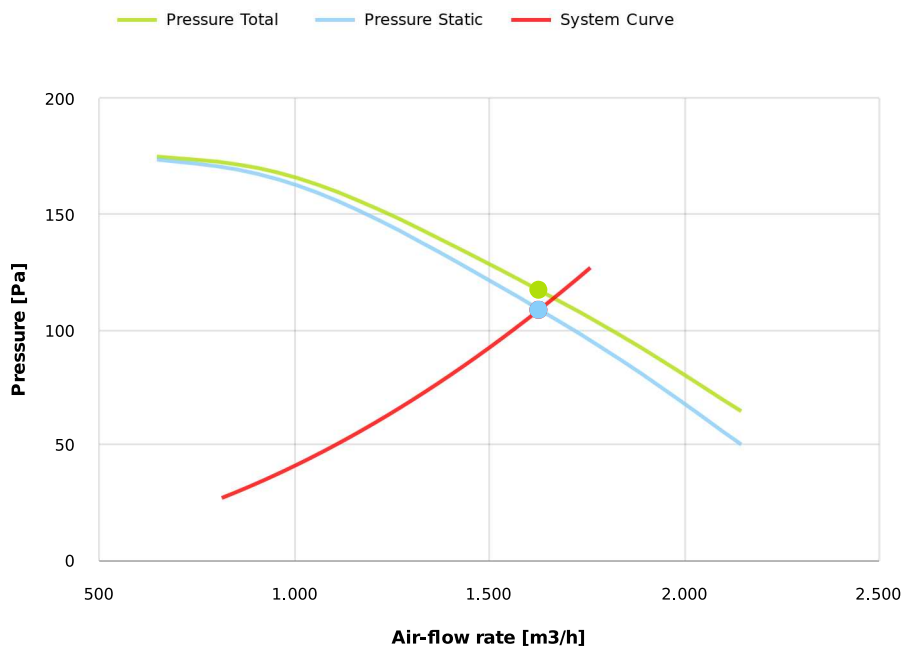

Dimensions

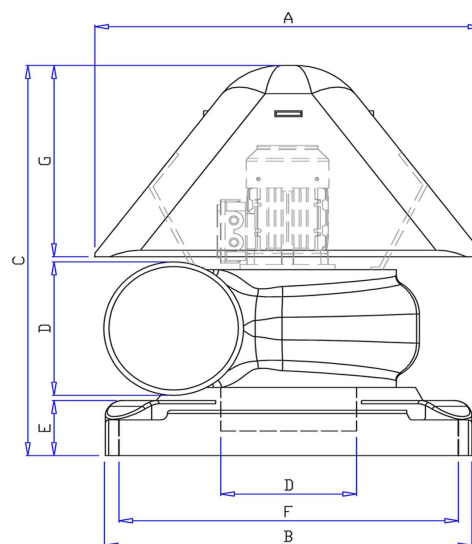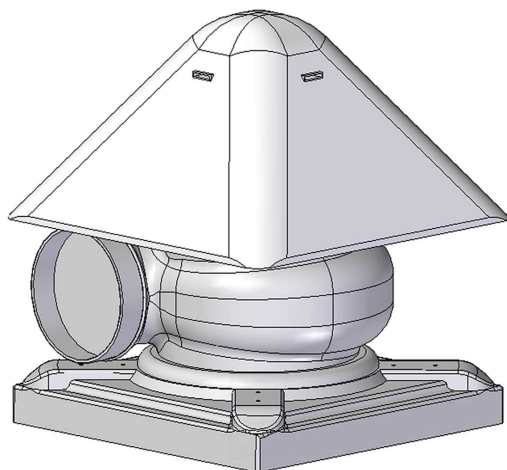

A	B	C	D	E	F	G
660	540	640	280	85	500	360

Configurations & cad

LG 0°

