


Research Data

Air-flow rate[m ³ /h]	2878
Pressure[Pa]	377.9
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO404ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	56
Frequency[Hz]	50
Speed[rpm]	1410
Power[kW]	0.55
IP	55
INS	



P-CO404ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





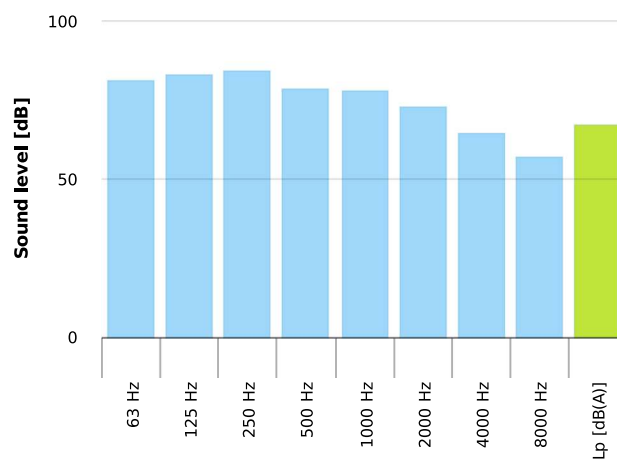


Table engines



Class IE	IE1
Size	71
Power[kW]	0.55
Current[A]	1.6
Voltage[V]	400
Cos φ	0.75
n	0.66

Working point

Q [m ³ /h]	2878
P _{sta} [Pa]	377.9
P _{tot} [Pa]	394.0
P _{in} [kW] [W]	376.5
n _{sta}	0.802
n _{tot}	0.837
Rpm	1410

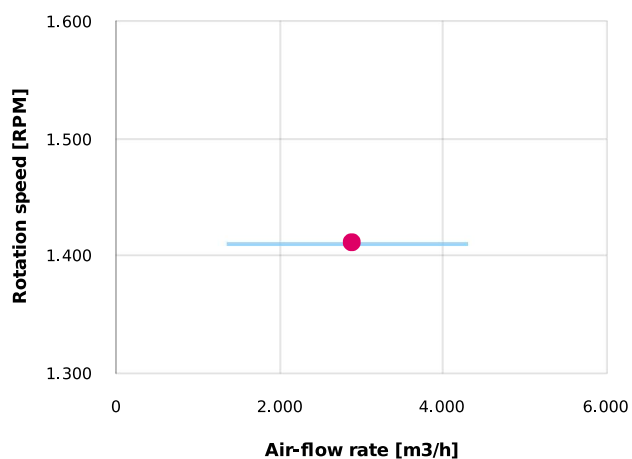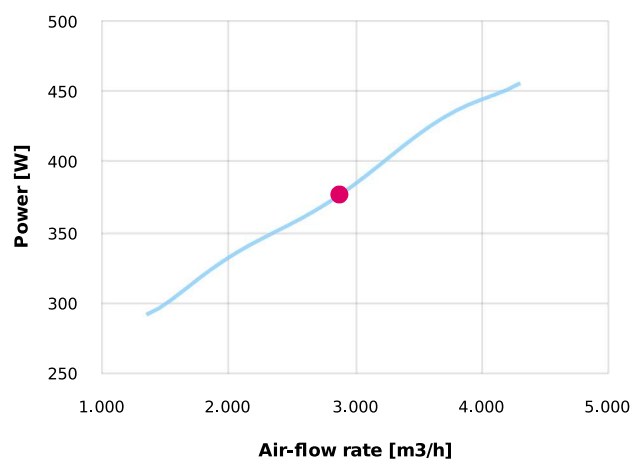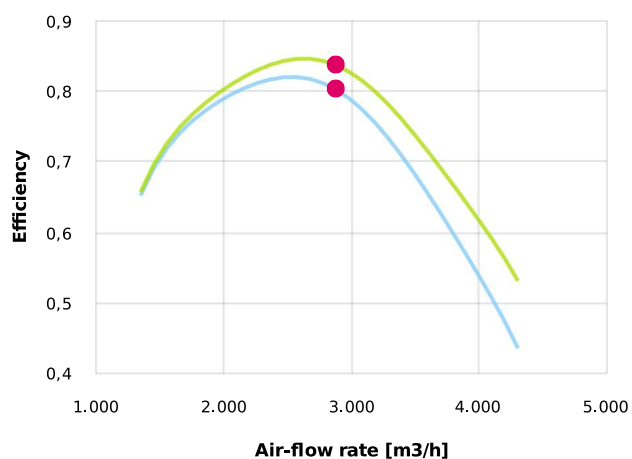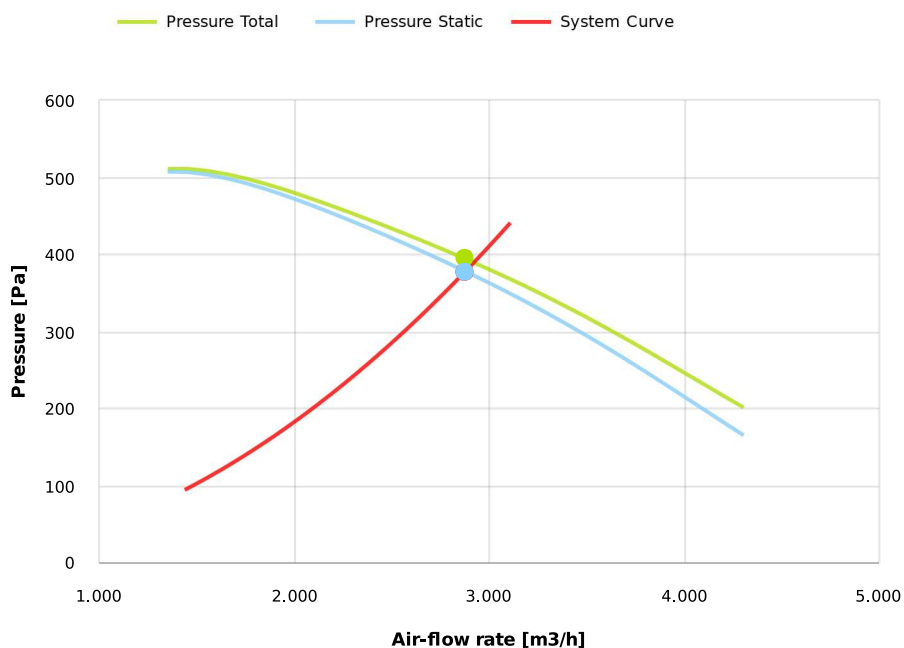

Dimensions

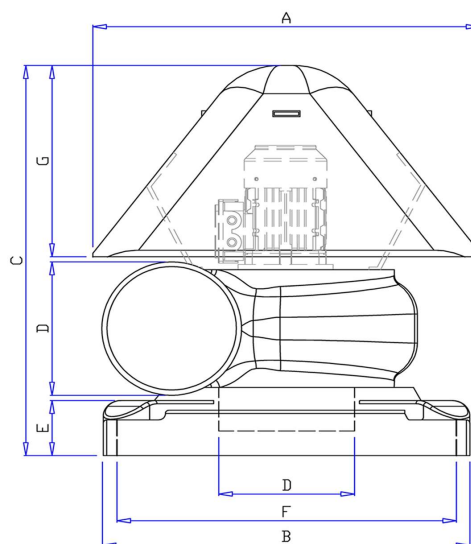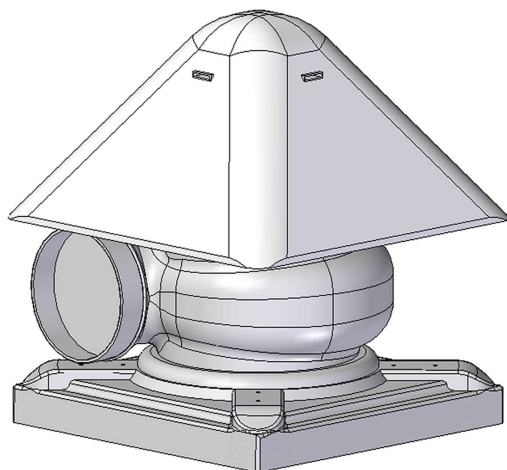

A	B	C	D	E	F	G
660	750	685	315	100	700	360

Configurations & cad

LG 0°

