


Research Data

Air-flow rate[m ³ /h]	3082
Pressure[Pa]	352.4
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO404
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	42
Frequency[Hz]	50
Speed[rpm]	1410
Power[kW]	0.55
IP	55
INS	


P-CO404

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





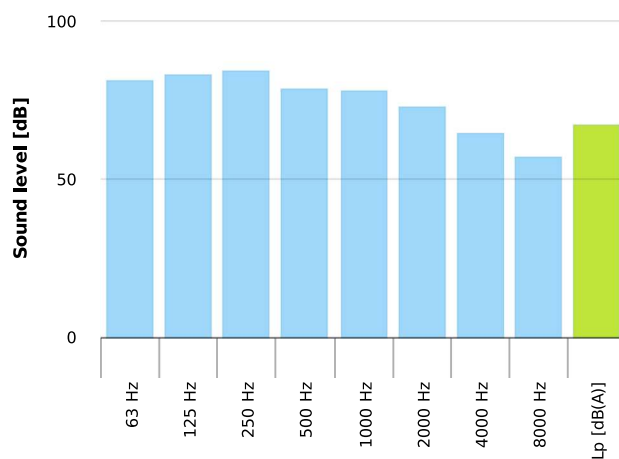


Table engines


Class IE	IE1
Size	71
Power[kW]	0.55
Current[A]	1.6
Voltage[V]	400
Cos φ	0.75
n	0.66

Working point

Q [m3/h]	3082
Psta [Pa]	352.4
Ptot [Pa]	370.9
Pin [kW] [W]	389.9
nsta	0.774
ntot	0.815
Rpm	1410

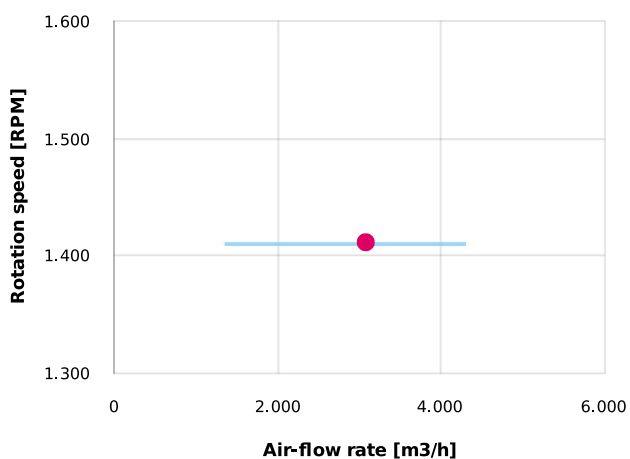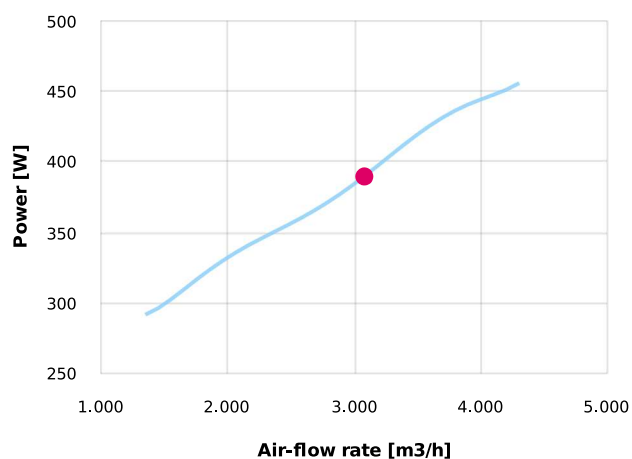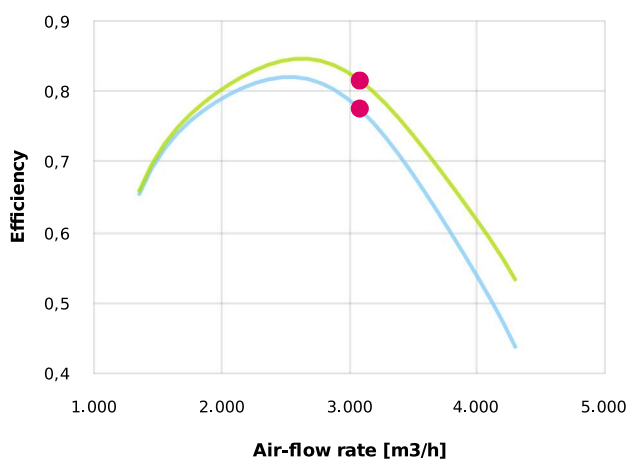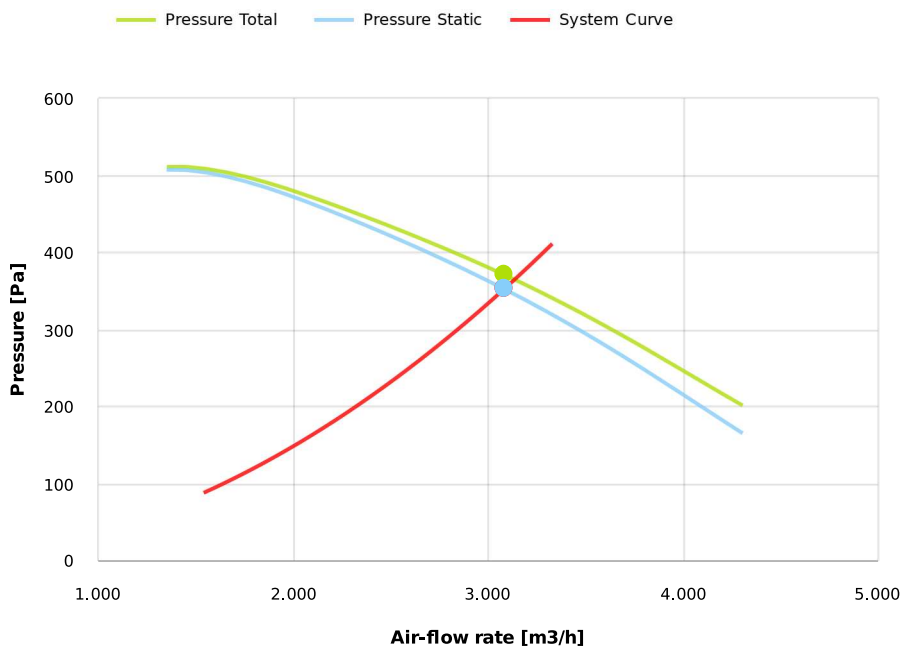

Dimensions

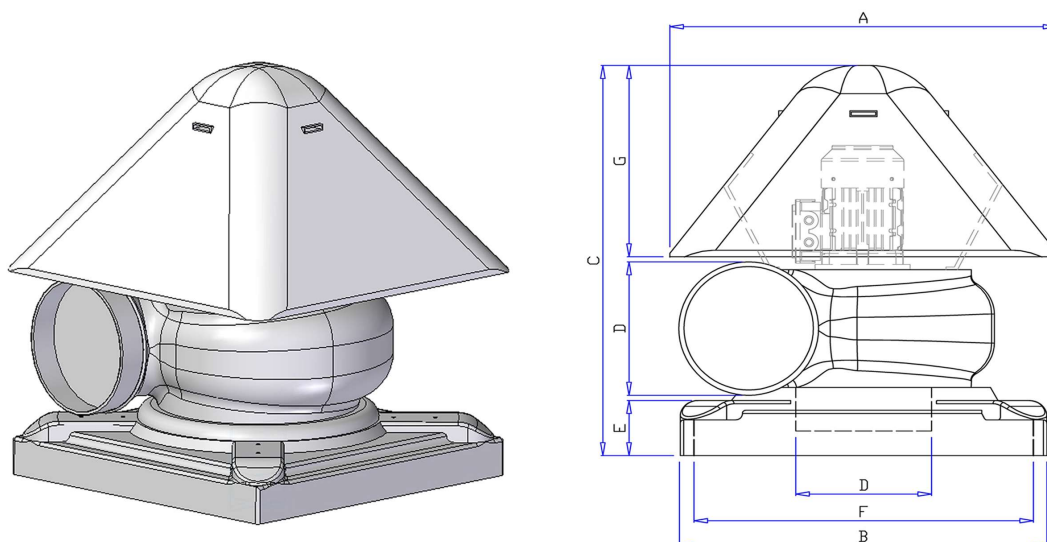

A	B	C	D	E	F	G
660	750	685	315	100	700	360

Configurations & cad

