


Research Data

Air-flow rate[m ³ /h]	1878
Pressure[Pa]	160.9
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO406ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	50
Frequency[Hz]	50
Speed[rpm]	920
Power[kW]	0.25
IP	55
INS	



P-CO406ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





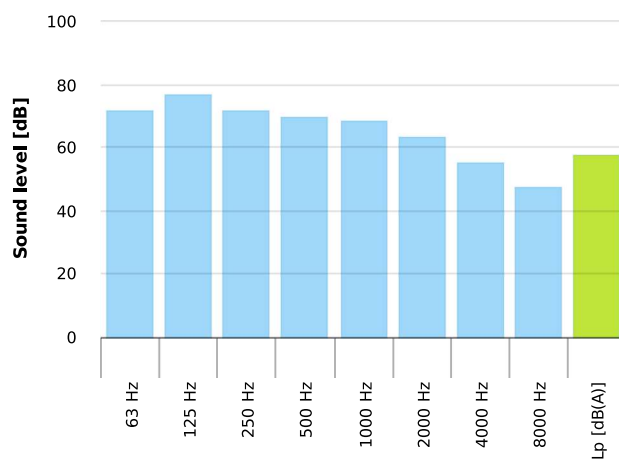


Table engines



Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.87
Voltage[V]	400
Cos φ	0.7
n	0.59

Working point

Q [m ³ /h]	1878
P _{sta} [Pa]	160.9
P _{tot} [Pa]	167.7
P _{in} [kW] [W]	104.5
n _{sta}	0.803
n _{tot}	0.837
Rpm	920

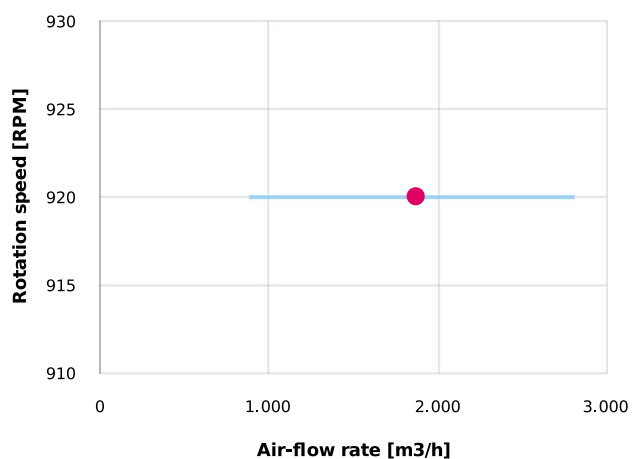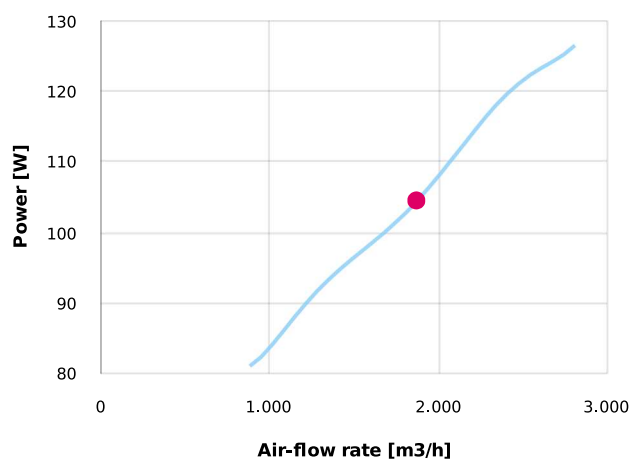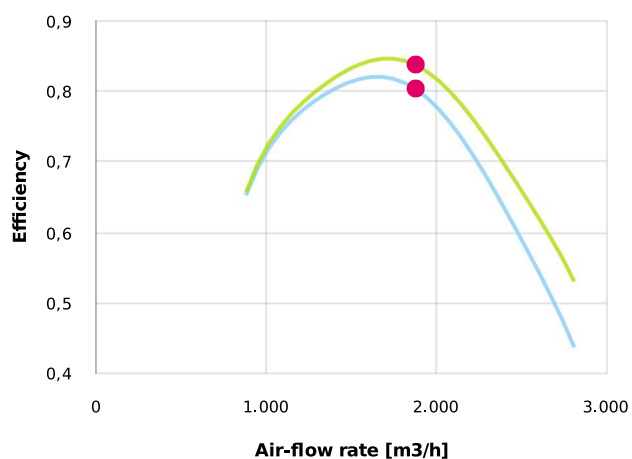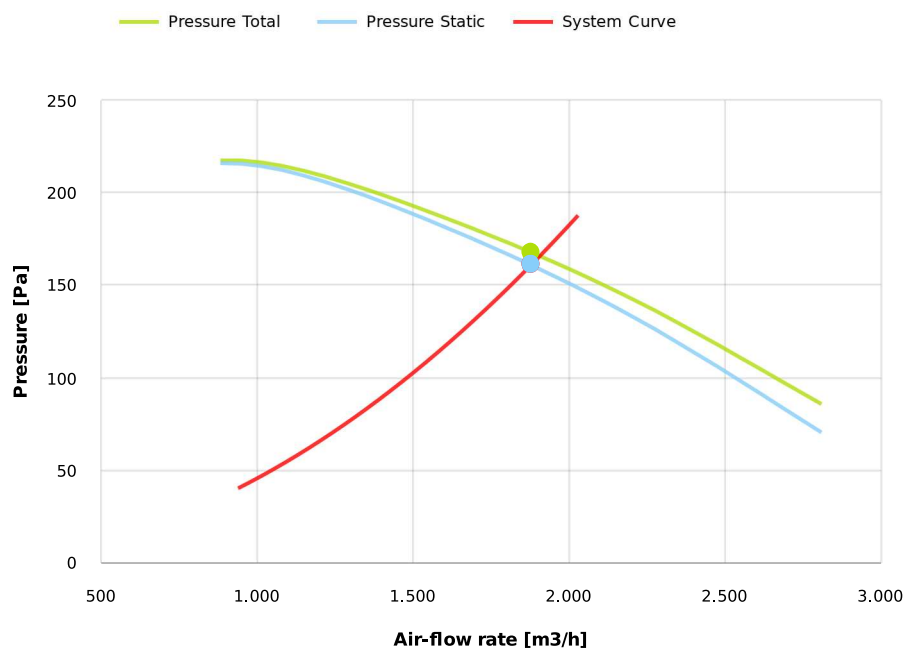

Dimensions

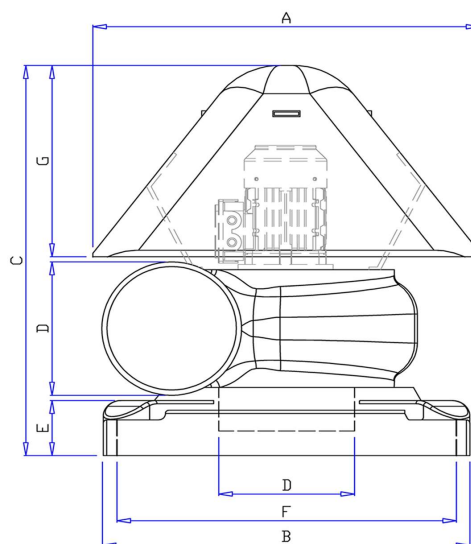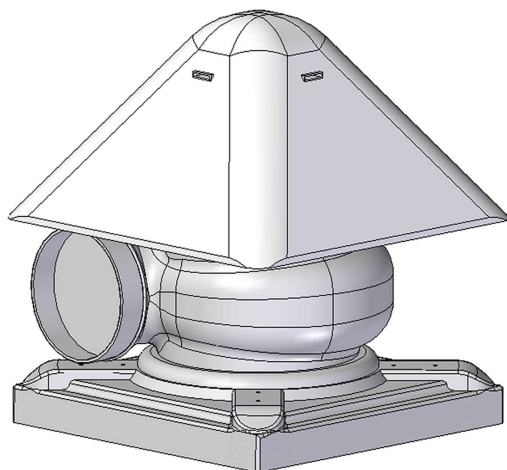

A	B	C	D	E	F	G
660	750	685	315	100	700	55

Configurations & cad

LG 0°

