


Research Data

Air-flow rate[m ³ /h]	2412
Pressure[Pa]	592.2
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO454ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	70
Frequency[Hz]	50
Speed[rpm]	1410
Power[kW]	1.1
IP	55
INS	



P-CO454ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





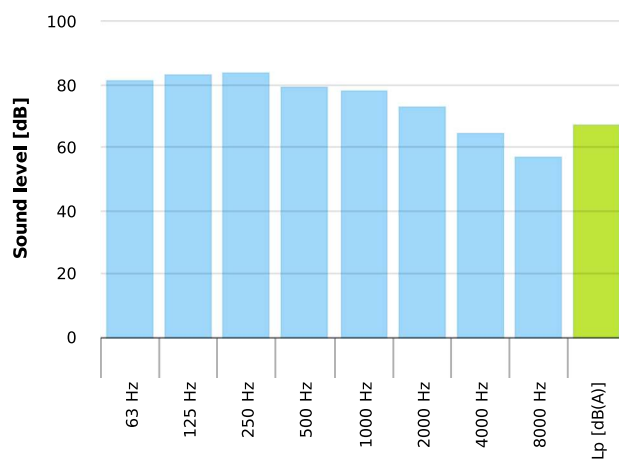


Table engines



Class IE	IE1	IE2	IE3
Size	90S	90	90S
Power[kW]	1.1	1.1	1.1
Current[A]	2.64	2.75	2.6
Voltage[V]	400	400	400
Cos φ	0.79	0.71	0.72
n	0.762	0.814	0.841

Working point

Q [m ³ /h]	2412
P _{sta} [Pa]	592.2
P _{tot} [Pa]	599.2
P _{in} [kW] [W]	497.1
n _{sta}	0.796
n _{tot}	0.806
Rpm	1410

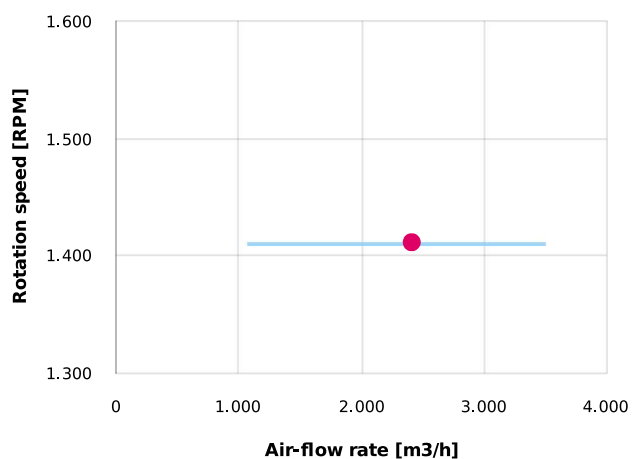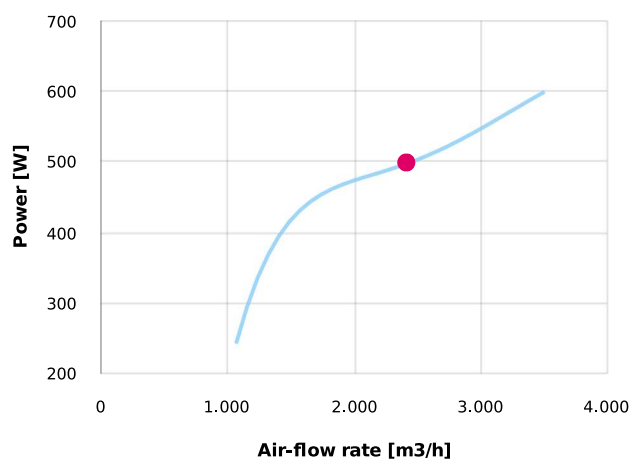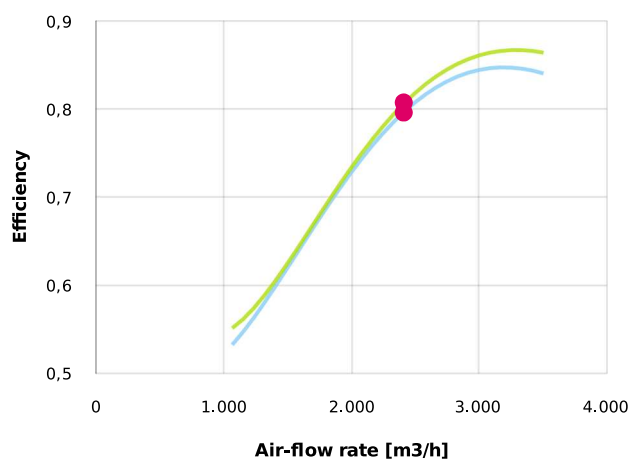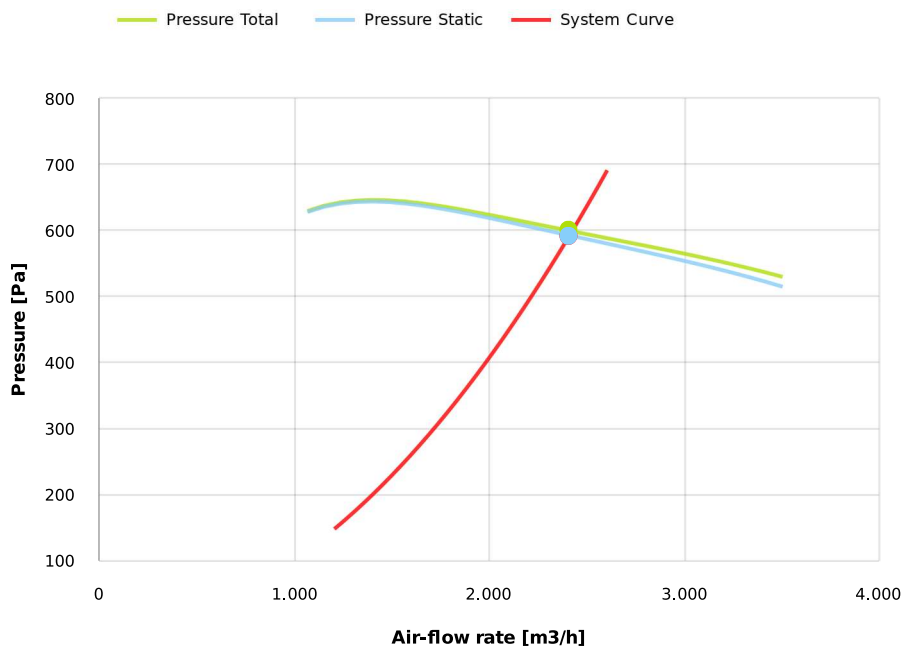

Dimensions

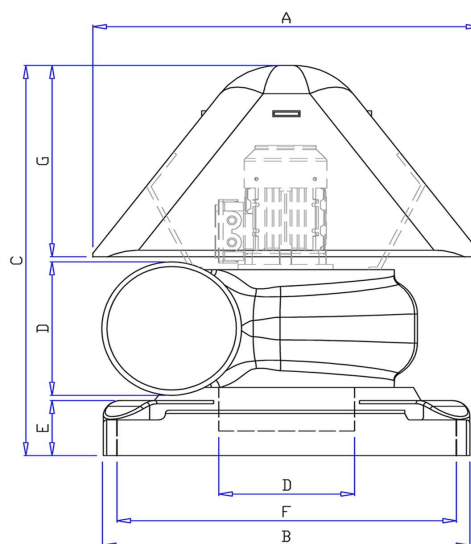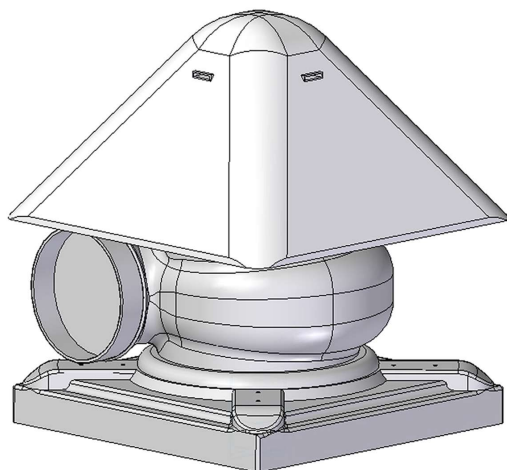

A	B	C	D	E	F	G
660	750	710	355	100	700	360

Configurations & cad

LG 0°

