


Research Data

Air-flow rate[m ³ /h]	2096
Pressure[Pa]	229.2
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	P-CO456ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	60
Frequency[Hz]	50
Speed[rpm]	920
Power[kW]	0.37
IP	55
INS	



P-CO456ATEX

Pe moulded housing - PP moulded impeller - PE base-
ABS protection cap - stainless steel screws

Certificazioni





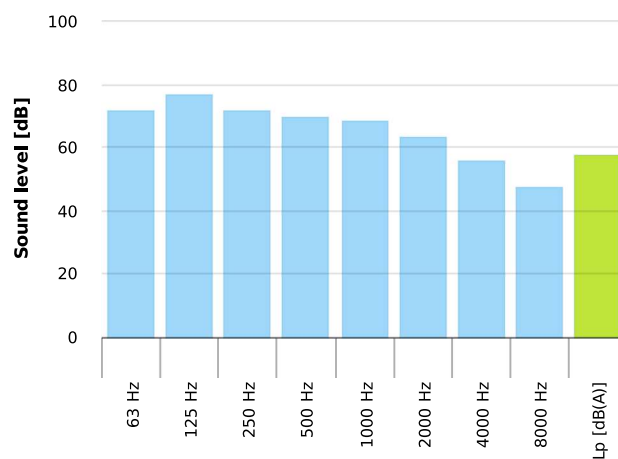


Table engines



Class IE	IE1
Size	71
Power[kW]	0.37
Current[A]	1.27
Voltage[V]	400
Cos φ	0.67
n	0.61

Working point

Q [m ³ /h]	2096
P _{sta} [Pa]	229.2
P _{tot} [Pa]	234.5
P _{in} [kW] [W]	158.0
n _{sta}	0.847
n _{tot}	0.866
Rpm	920

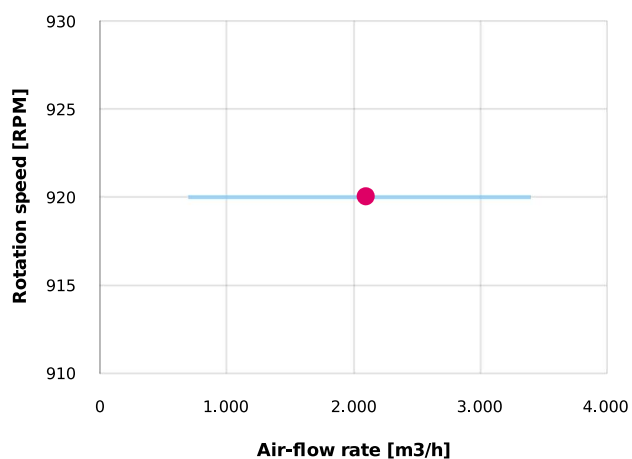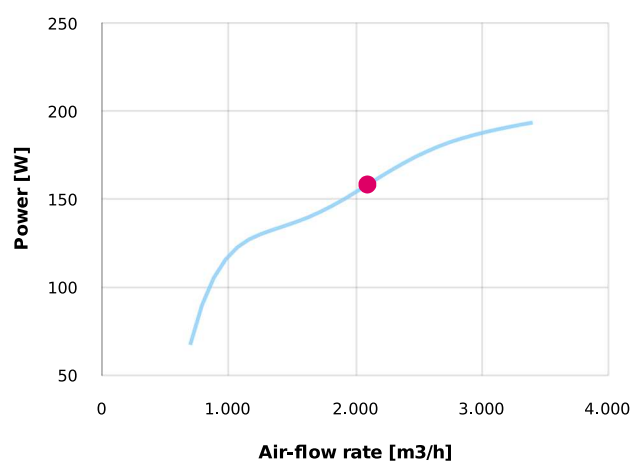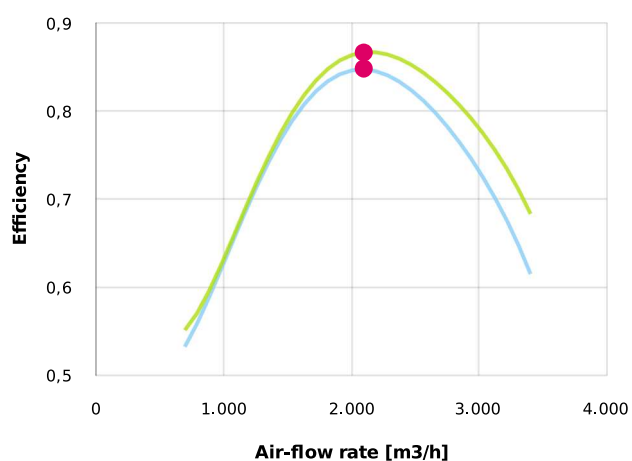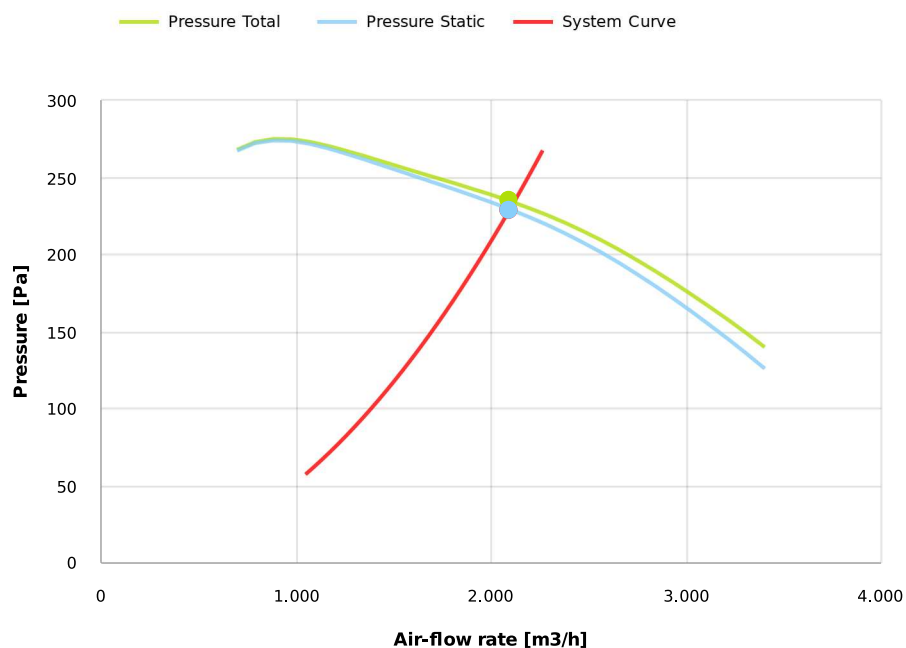

Dimensions

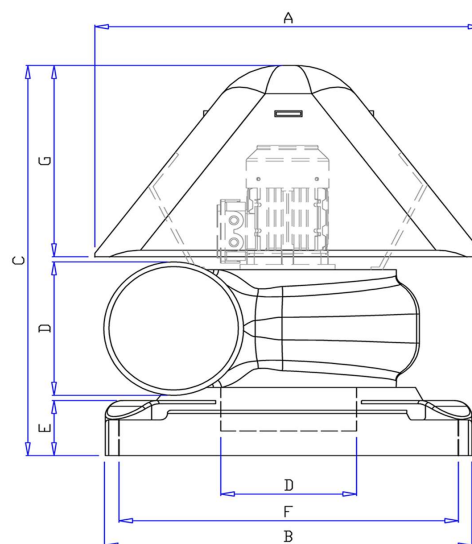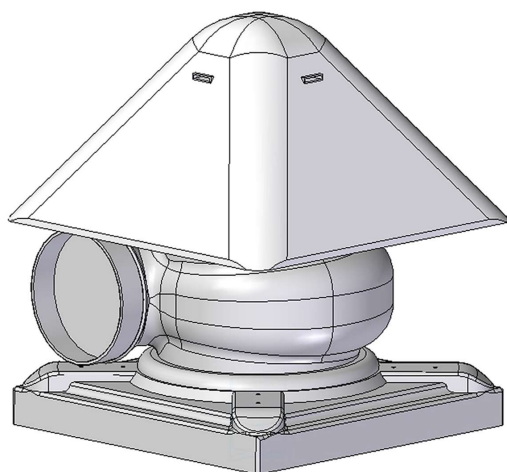

A	B	C	D	E	F	G
660	750	710	355	100	700	360

Configurations & cad

LG 0°

