


Research Data

Air-flow rate[m ³ /h]	283.1
Pressure[Pa]	1019
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS252
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	26
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	0.37
IP	55
INS	


PAS252

PP welded housing - PP welded impeller / INOX /
Fe+Ebonite - epoxy painted motor support - stainless
steel screws

Certificazioni





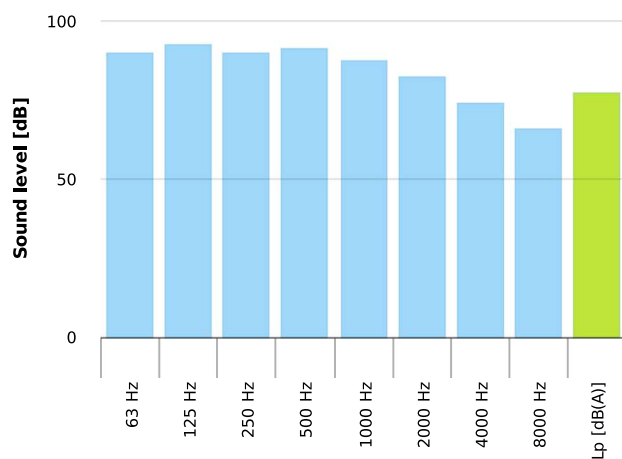


Table engines


Class IE	IE1
Size	63
Power[kW]	0.37
Current[A]	1.05
Voltage[V]	400
Cos φ	0.78
n	0.65

Working point

Q [m3/h]	283.1
Psta [Pa]	1019.
Ptot [Pa]	1054.
Pin [kW] [W]	132.6
nsta	0.605
ntot	0.626
Rpm	2800

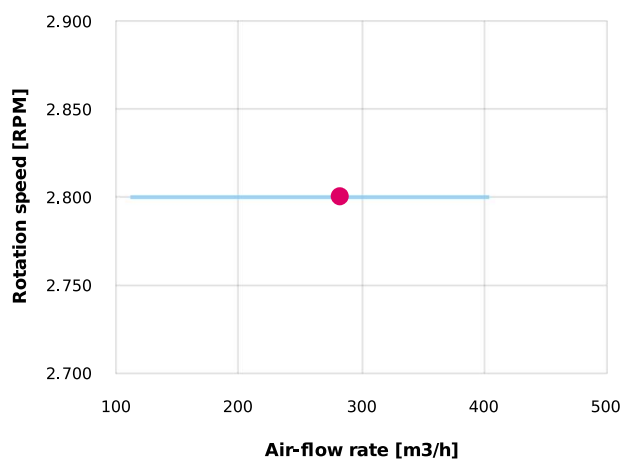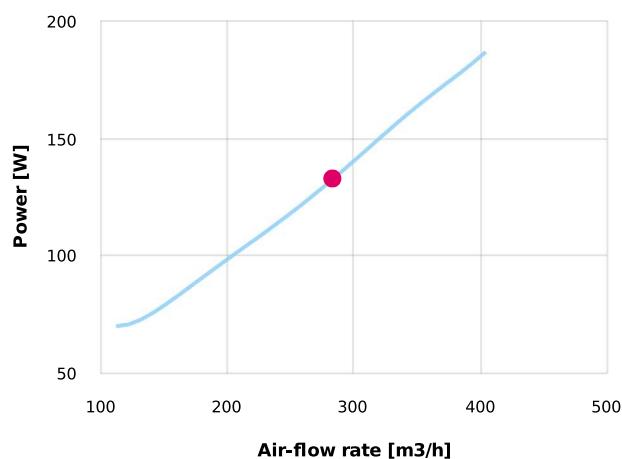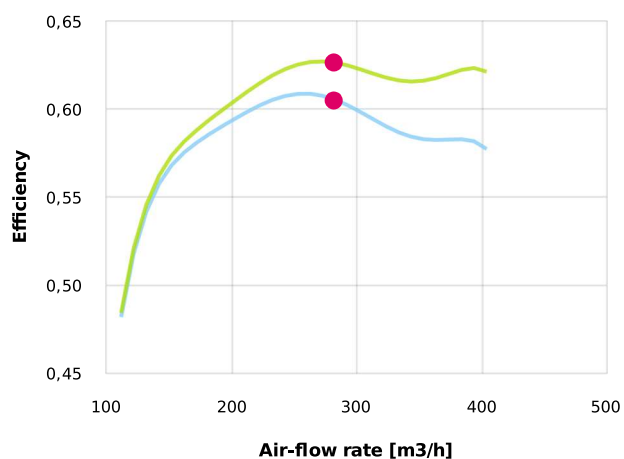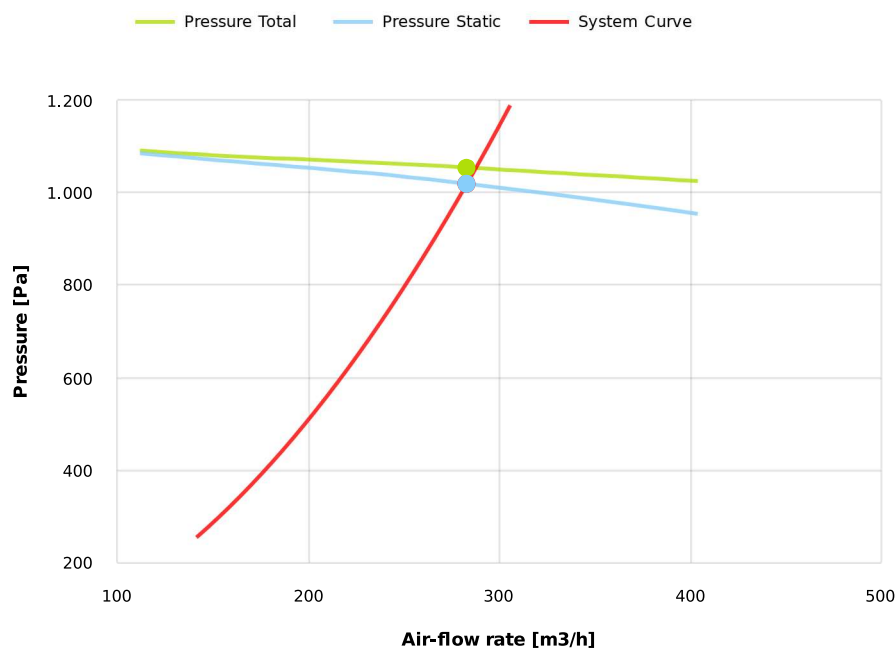

Dimensions

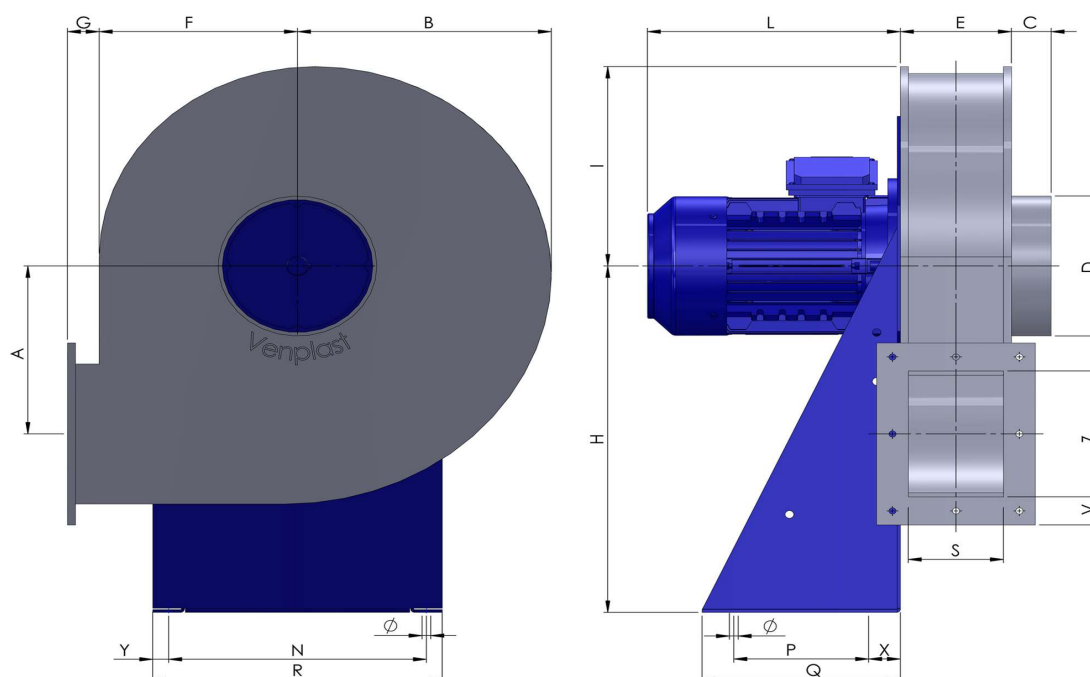

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
160	205	50	125	100	172	40	310	187	219	255	11	100	140
R			S		V		X		Y		Z		
290			80		40		20		18		130		

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°



LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

