


Research Data

Air-flow rate[m ³ /h]	396.5
Pressure[Pa]	1276
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS282
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	27
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	0.55
IP	55
INS	



PAS282

PP welded housing - PP welded impeller / INOX /
Fe+Ebonite - epoxy painted motor support - stainless
steel screws

Certificazioni





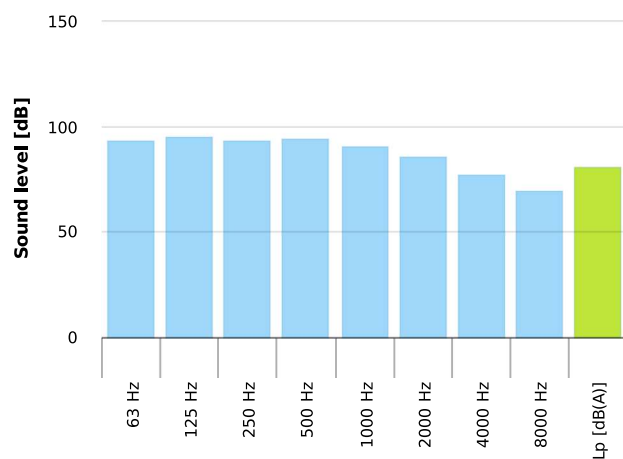


Table engines


Class IE	IE1
Size	71
Power[kW]	0.55
Current[A]	1.42
Voltage[V]	400
Cos φ	0.79
n	0.71

Working point

Q [m ³ /h]	396.5
P _{sta} [Pa]	1276.
P _{tot} [Pa]	1323.
P _{in} [kW] [W]	234.6
n _{sta}	0.599
n _{tot}	0.621
Rpm	2800

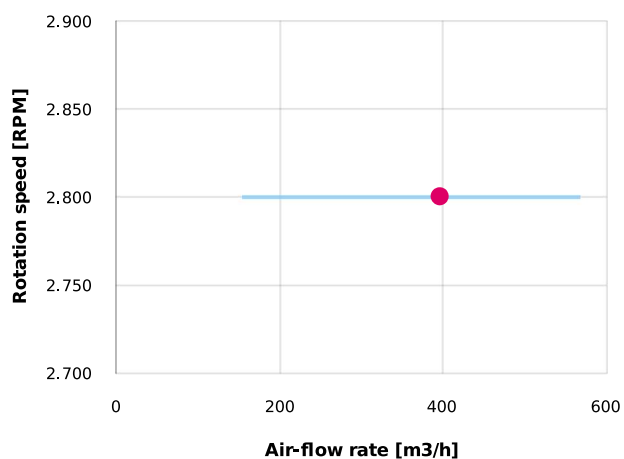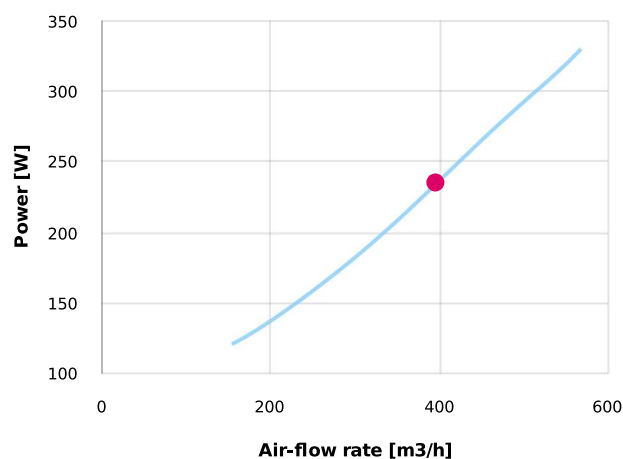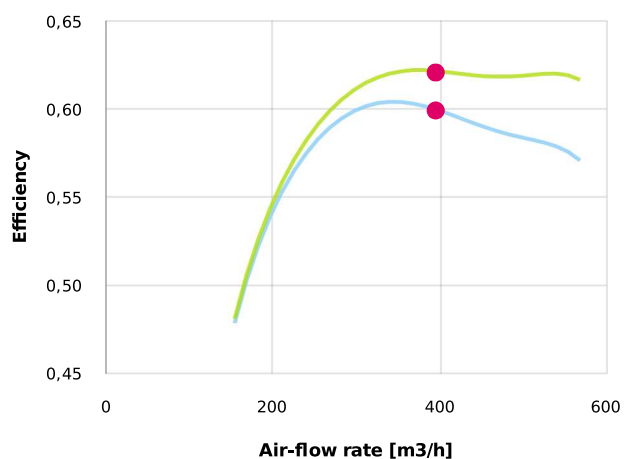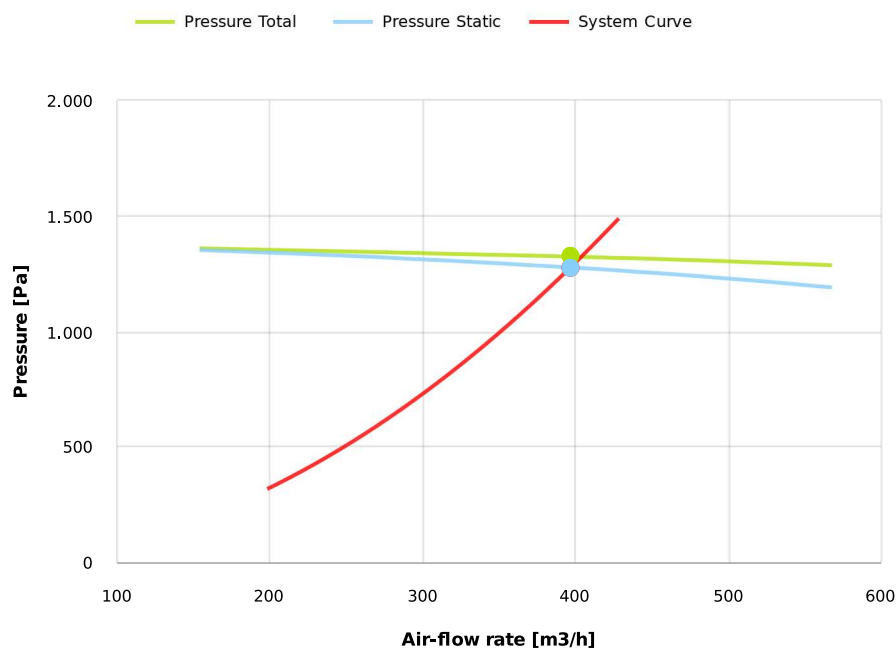

Dimensions

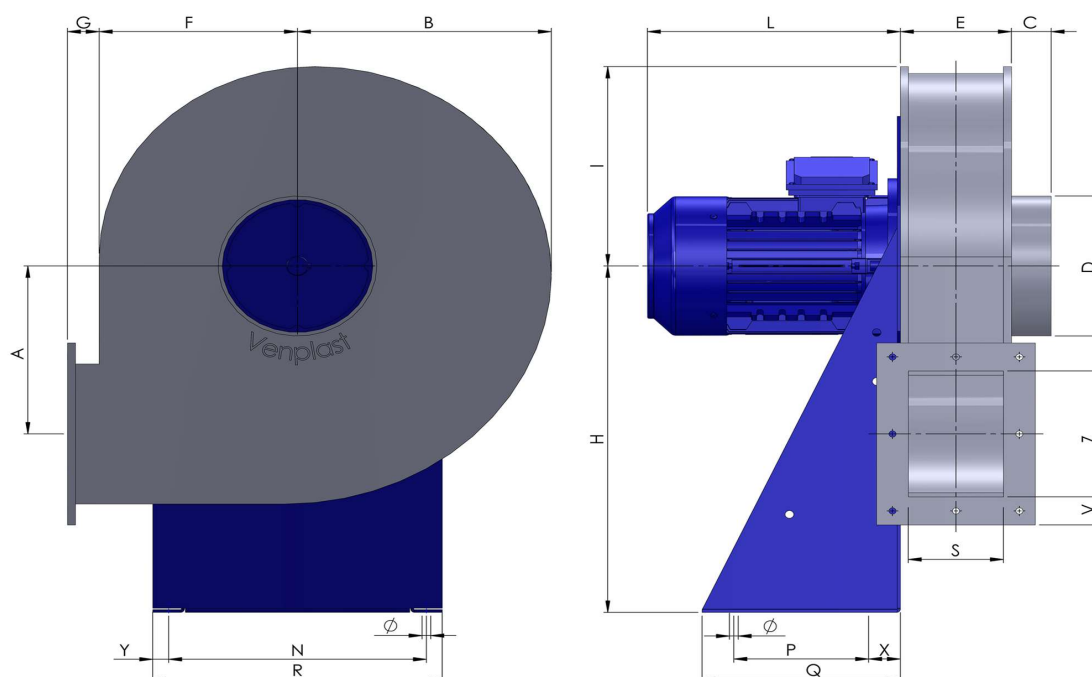

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
175	229	50	140	110	190	40	350	215	240	280	11	120	190
R			S		V		X		Y		Z		
316			90		40		35		18		140		

Configurations & cad

