


Research Data

Air-flow rate[m ³ /h]	808
Pressure[Pa]	2012
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS352
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	32
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	1.5
IP	55
INS	


PAS352

PP welded housing - PP welded impeller / INOX /
Fe+Ebonite - epoxy painted motor support - stainless
steel screws

Certificazioni





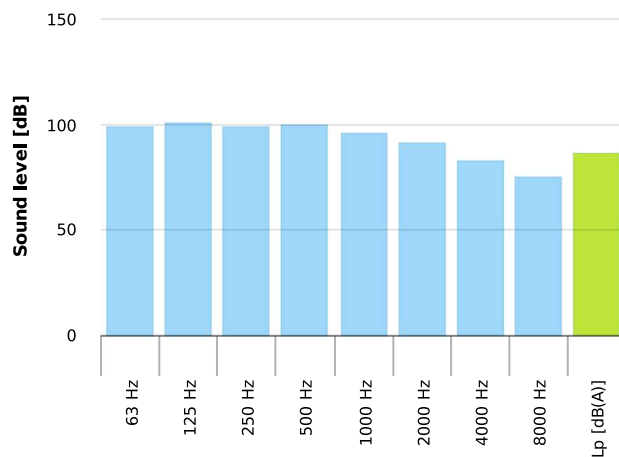


Table engines


Class IE	IE1	IE2	IE3
Size	90S	90S	90S
Power[kW]	1.5	1.5	1.5
Current[A]	3.32	3.21	3.1
Voltage[V]	400	400	400
Cos φ	0.83	0.83	0.82
n	0.785	0.813	0.842

Working point

Q [m ³ /h]	808
P _{sta} [Pa]	2012.
P _{tot} [Pa]	2112.
P _{in} [kW] [W]	759.9
n _{sta}	0.594
n _{tot}	0.624
Rpm	2800

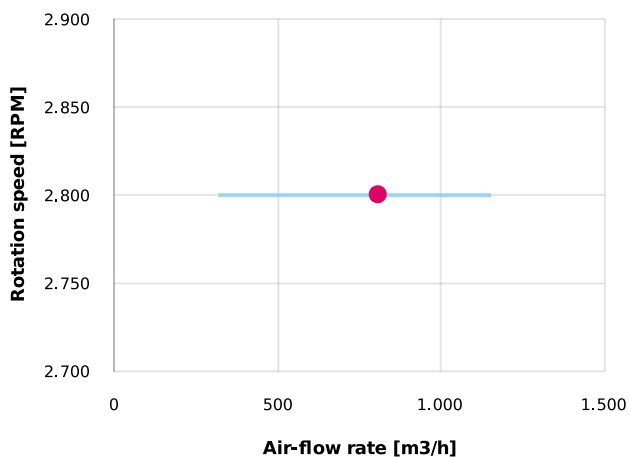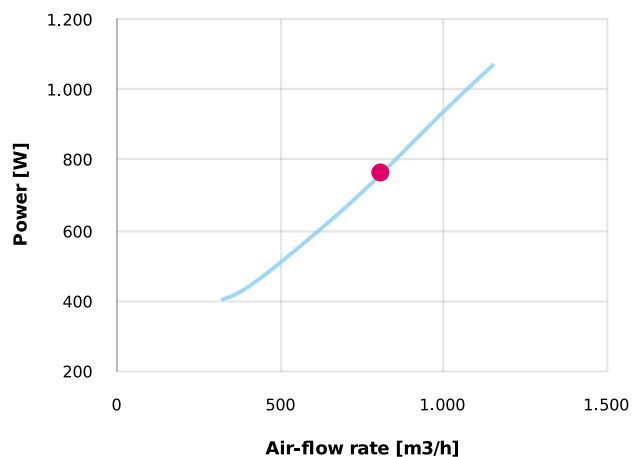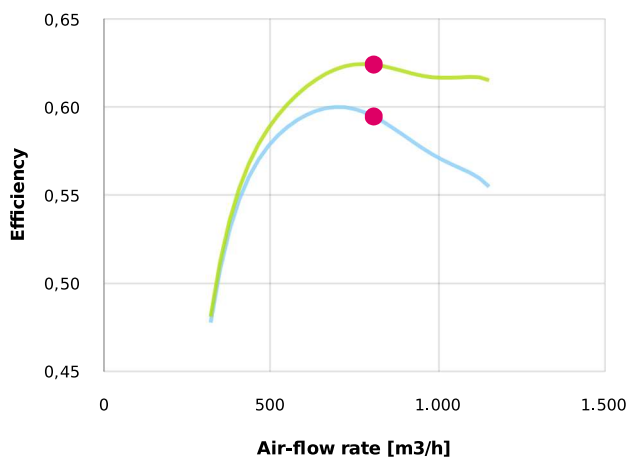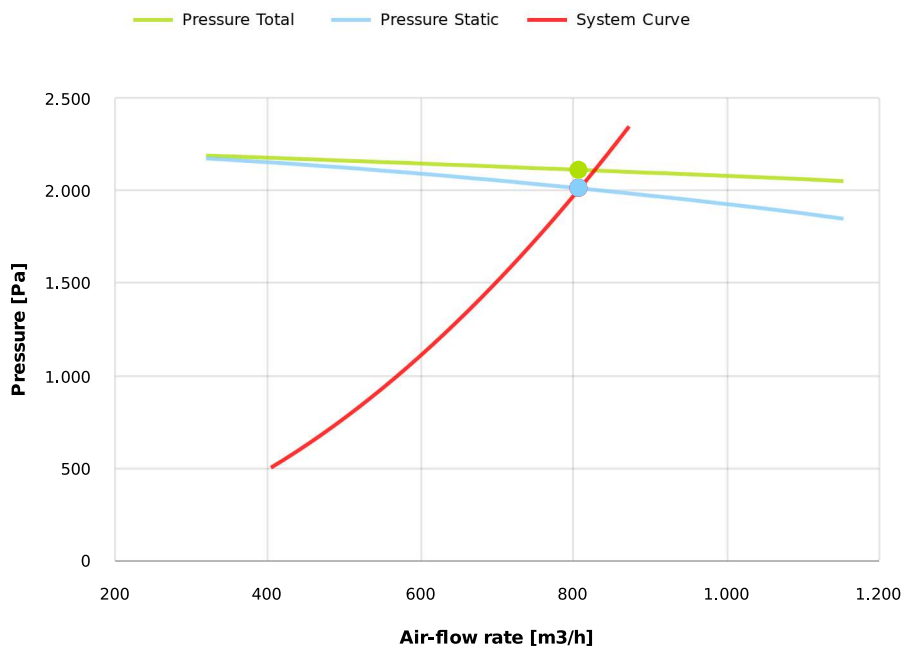

Dimensions

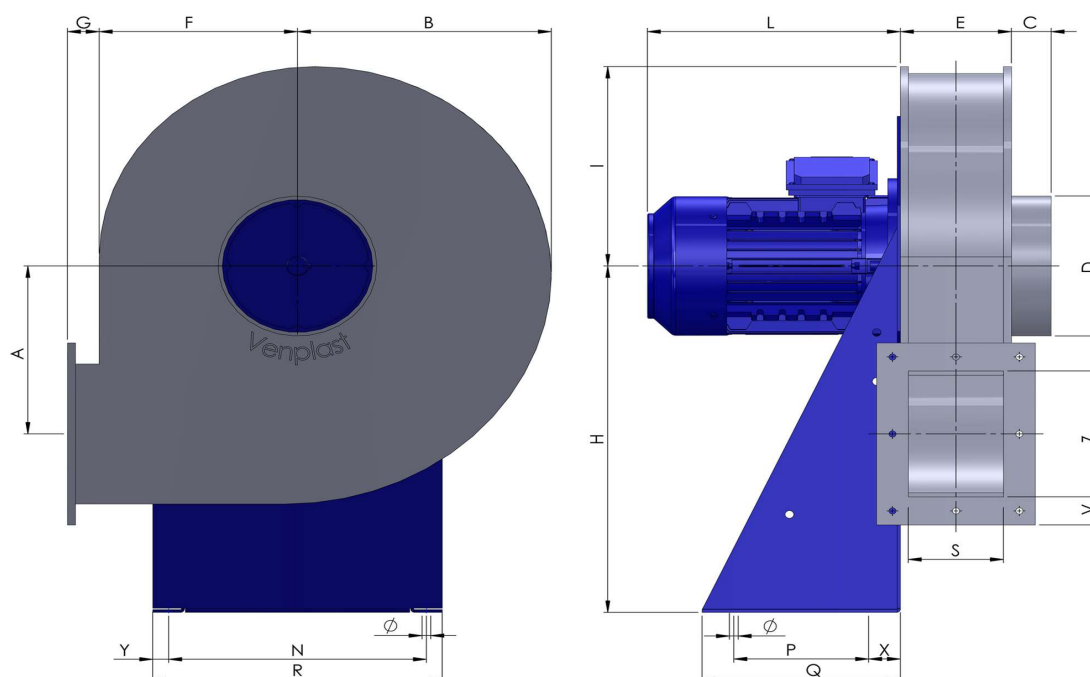

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
215	276	50	160	130	225	40	445	255	290	355	11	150	230
R			S		V		X		Y		Z		
390			110		40		40		18		160		

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°



LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

