


Research Data

Air-flow rate[m ³ /h]	1088
Pressure[Pa]	2595
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS402ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	75
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	2.2
IP	55
INS	



PAS402ATEX

PP welded housing - PP welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni





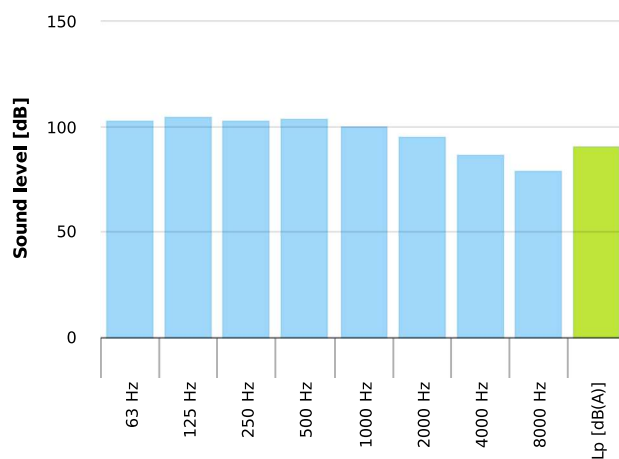


Table engines


Class IE	IE1	IE2	IE3
Size	90L	90L	90L
Power[kW]	2.2	2.2	2.2
Current[A]	4.61	4.6	4.4
Voltage[V]	400	400	400
Cos φ	0.85	0.83	0.84
n	0.81	0.832	0.859

Working point

Q [m³/h]	1088
P_{sta} [Pa]	2595.
P_{tot} [Pa]	2715.
P_{in} [kW] [W]	1310.
n_{sta}	0.598
n_{tot}	0.626
Rpm	2800

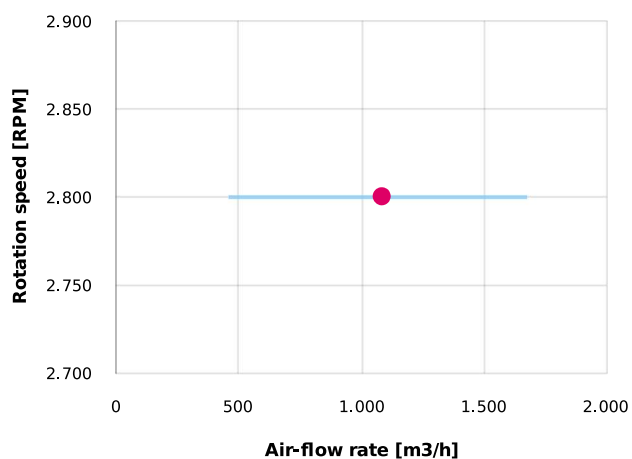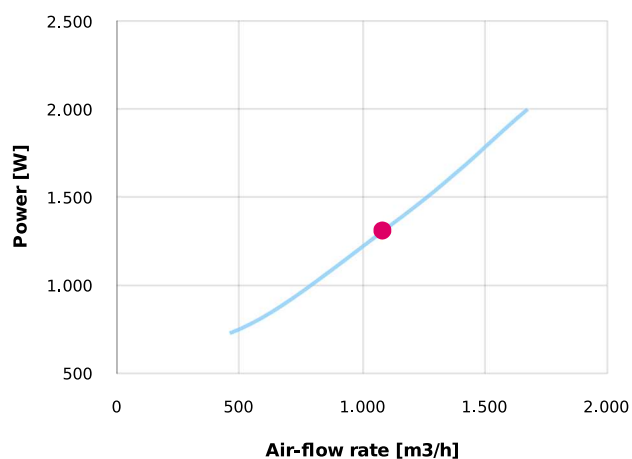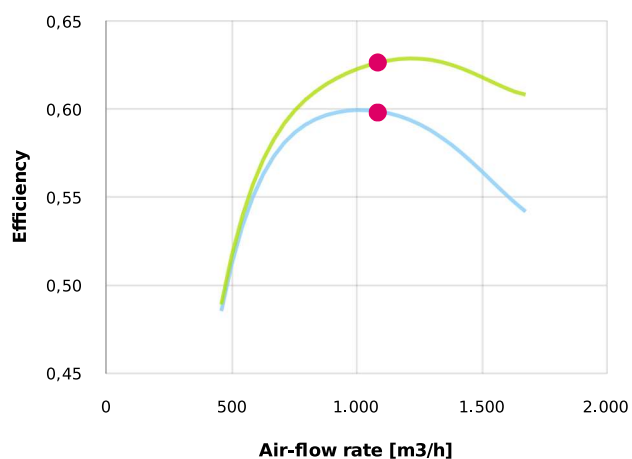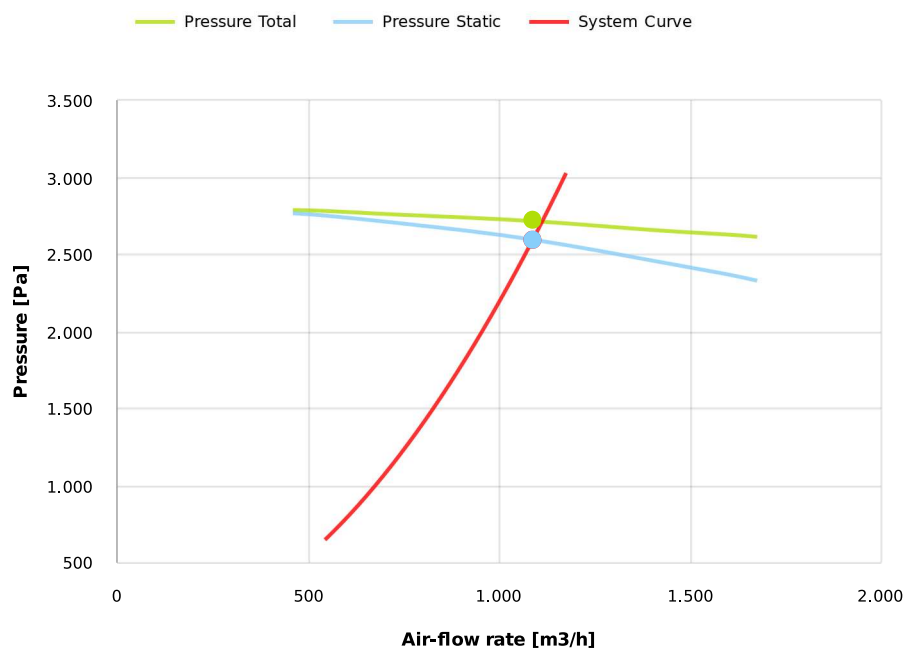

Dimensions

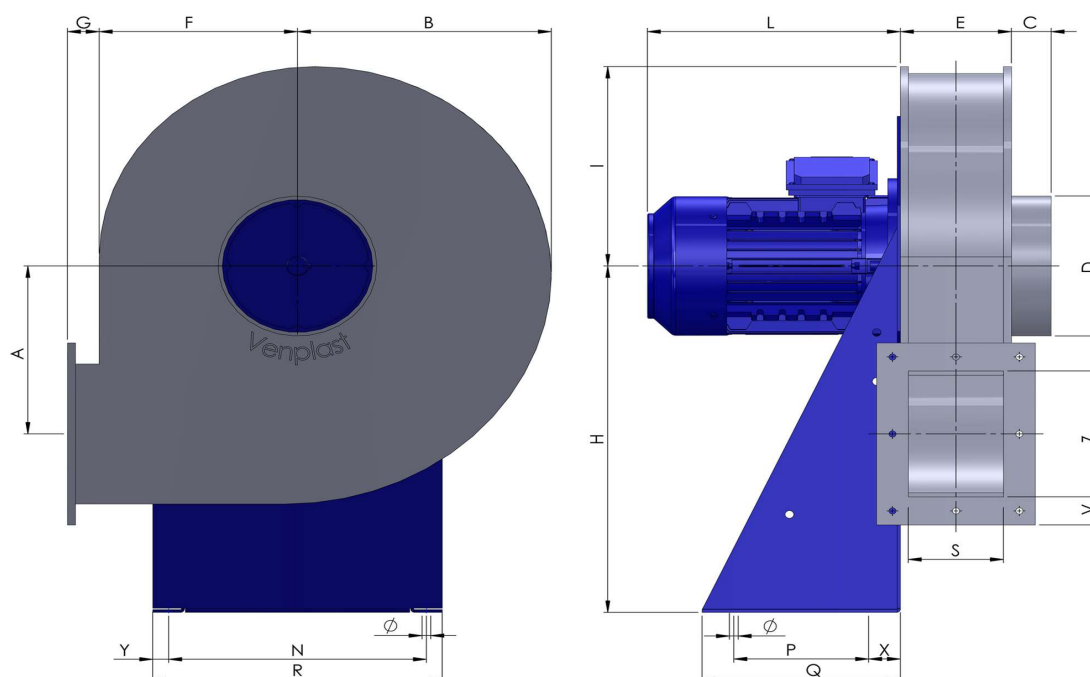

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
240	320	50	180	140	250	40	495	285	290	325	11	170	250
R		S			V		X		Y		Z		
365		120			40		40		20		180		

Configurations & cad

