


Research Data

Air-flow rate[m ³ /h]	1130
Pressure[Pa]	2579
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS402
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	53
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	2.2
IP	55
INS	


PAS402

PP welded housing - PP welded impeller / INOX /
Fe+Ebonite - epoxy painted motor support - stainless
steel screws

Certificazioni





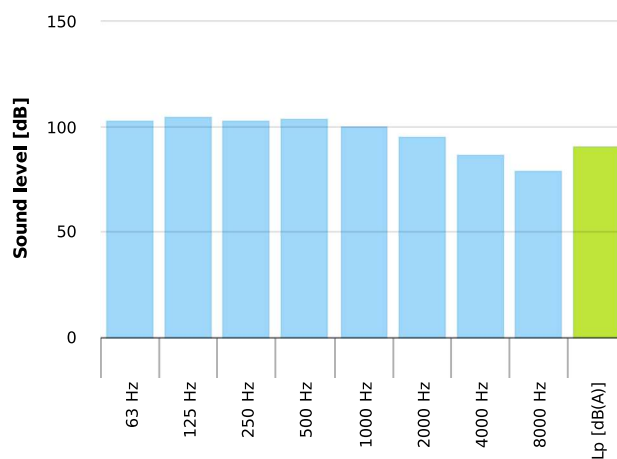


Table engines


Class IE	IE1	IE2	IE3
Size	90L	90L	90L
Power[kW]	2.2	2.2	2.2
Current[A]	4.61	4.6	4.4
Voltage[V]	400	400	400
Cos φ	0.85	0.83	0.84
n	0.81	0.832	0.859

Working point

Q [m³/h]	1130
P_{sta} [Pa]	2579.
P_{tot} [Pa]	2708.
P_{in} [kW] [W]	1354.
n_{sta}	0.597
n_{tot}	0.627
Rpm	2800

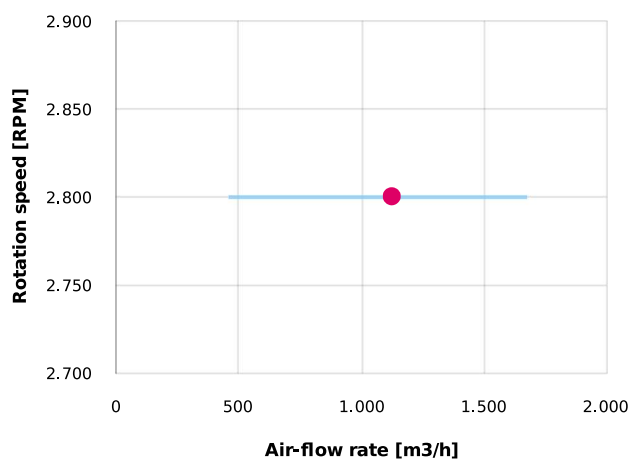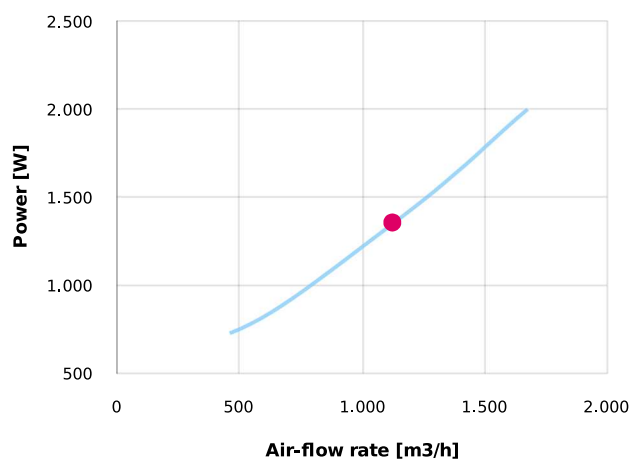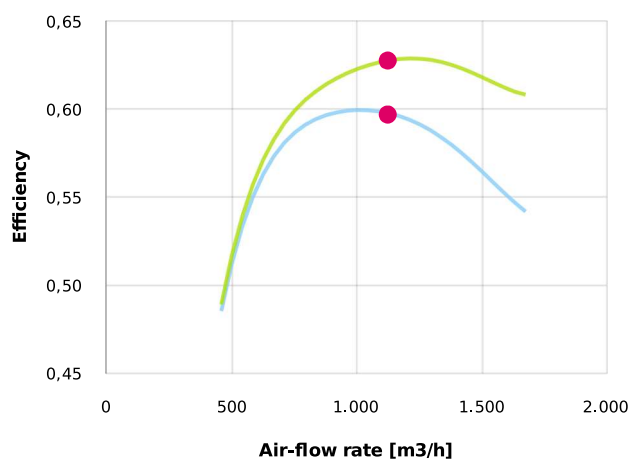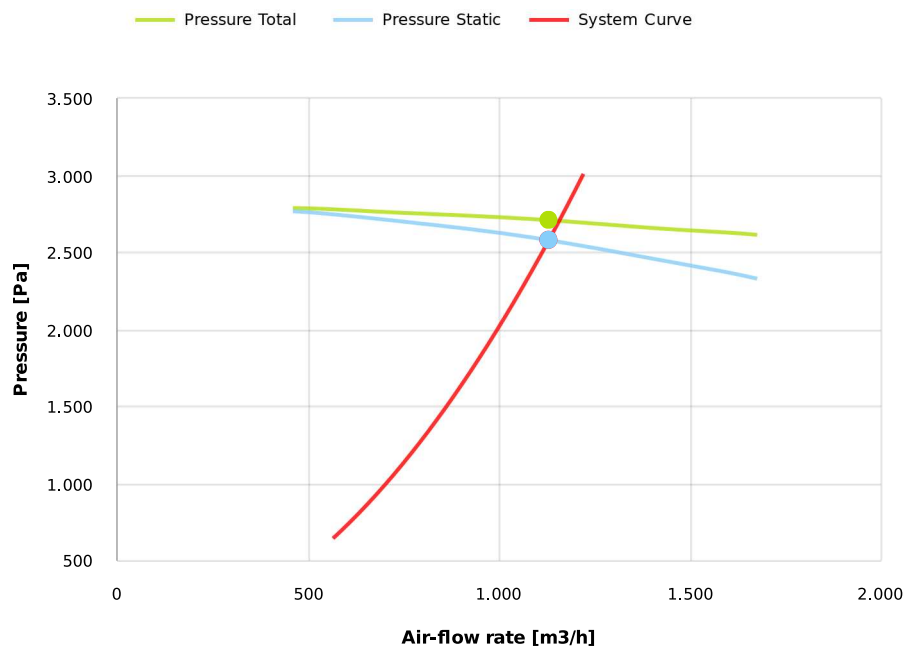


Dimensions

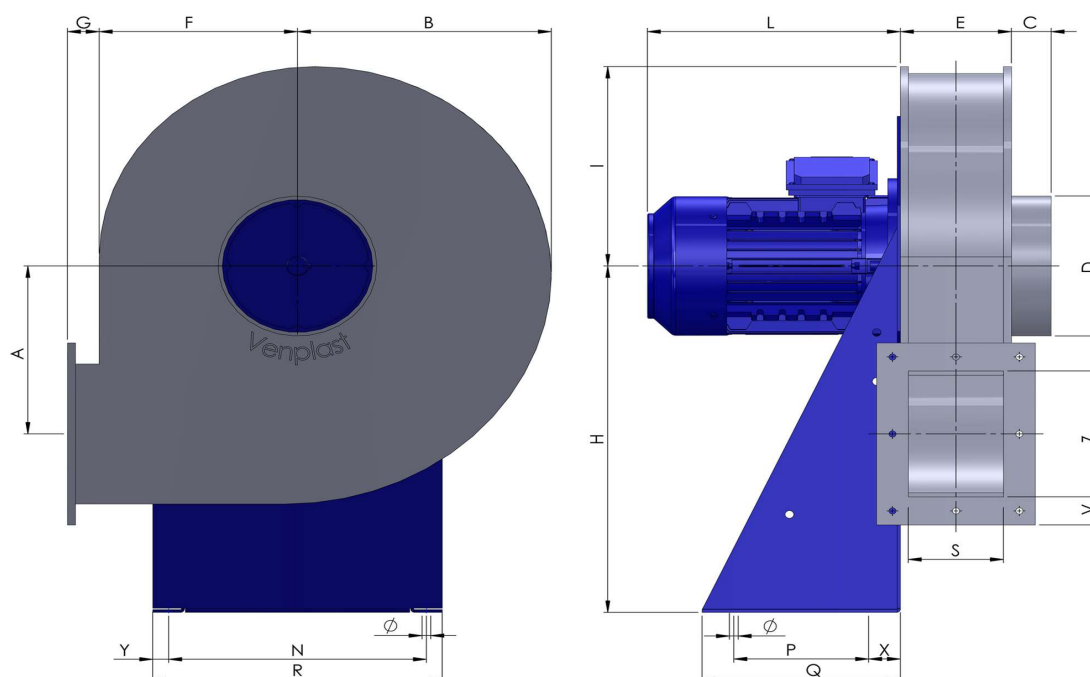

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
240	320	50	180	140	250	40	495	285	290	325	11	170	250
R			S			V		X		Y		Z	
365			120			40		40		20		180	

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°



LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

