


Research Data

Air-flow rate[m ³ /h]	2083
Pressure[Pa]	2562
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS562ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	235
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	11
IP	55
INS	



PAS562ATEX

Pe-el antistatic welded housing - PP welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni

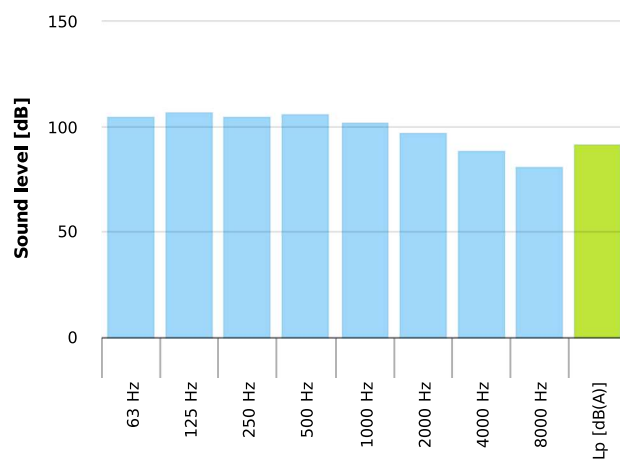
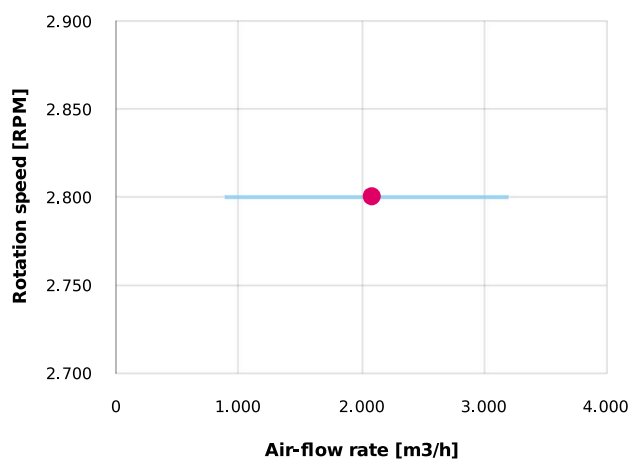
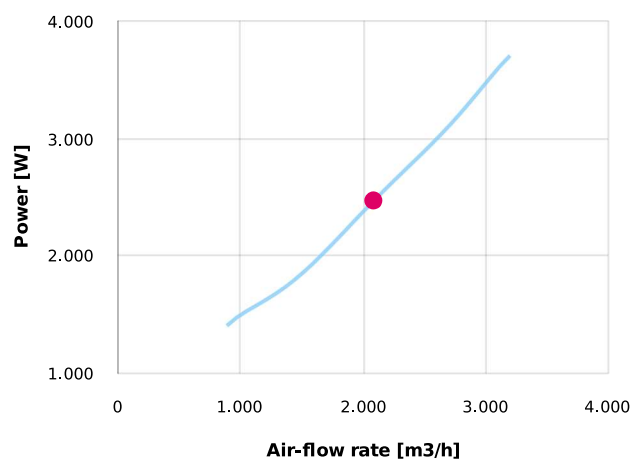
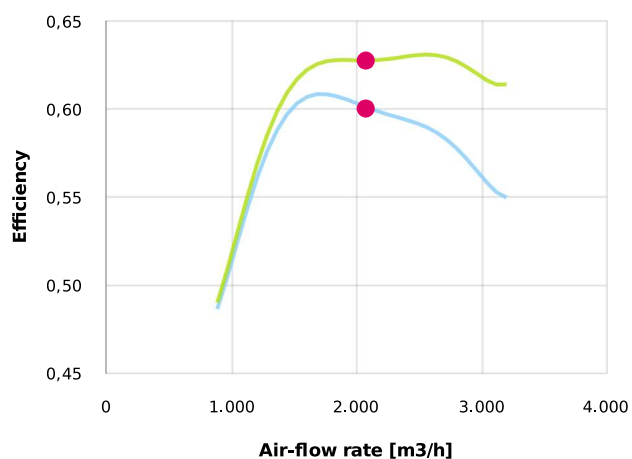
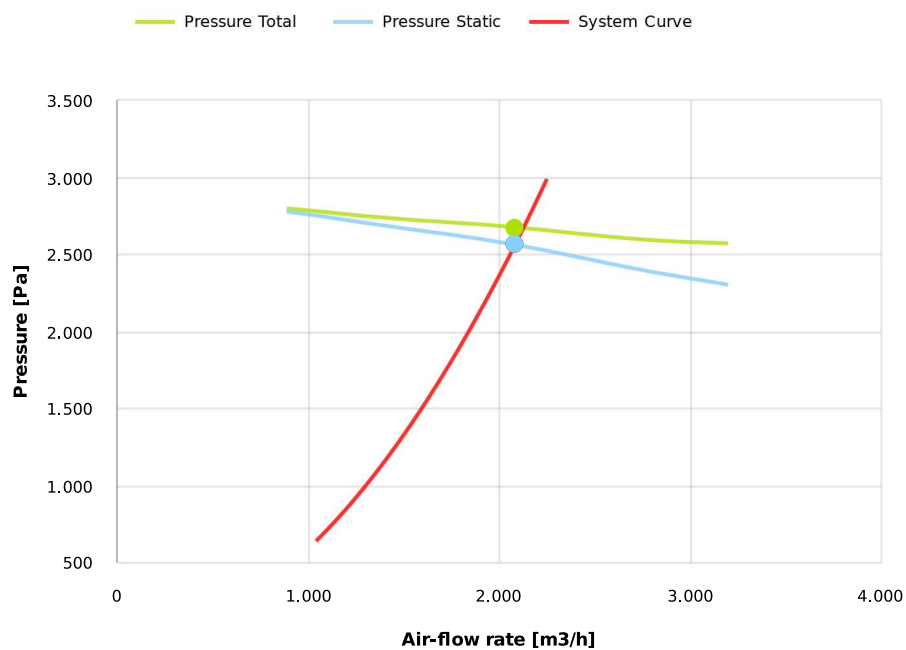


Table engines

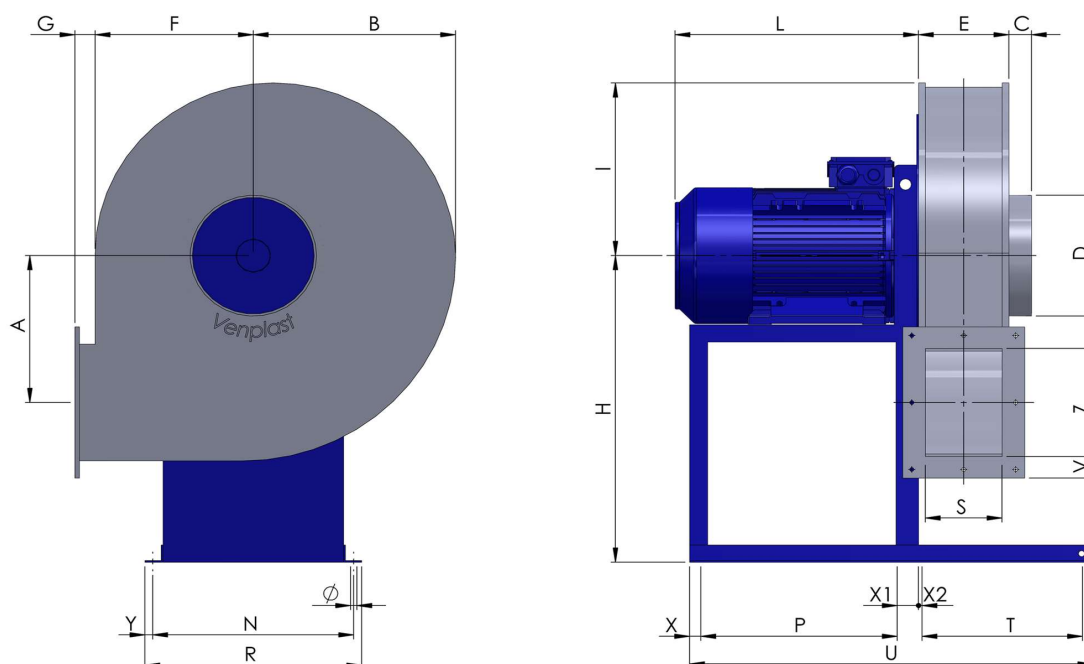
Class IE	IE1	IE2	IE3
Size	160M	160M	160M
Power[kW]	11	11	11
Current[A]	19.96	20	19.9
Voltage[V]	400	400	400
Cos φ	0.9	0.89	0.88
n	0.884	0.894	0.912

Working point

Q [m³/h]	2083
P_{sta} [Pa]	2562.
P_{tot} [Pa]	2675.
P_{in} [kW] [W]	2464.
n_{sta}	0.6
n_{tot}	0.627
Rpm	2800



Dimensions















A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
340	448	50	250	200	350	50	710	400	539	445	11	435	480
S	T	U	V	X	X1	X2	Y	Z					
170	355	893	50	25	40	15	18	250					

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
