


Research Data

Air-flow rate[m ³ /h]	3898
Pressure[Pa]	6566
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS632ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	255
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	15
IP	55
INS	



PAS632ATEX

Pe-el antistatic welded housing - PP welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni

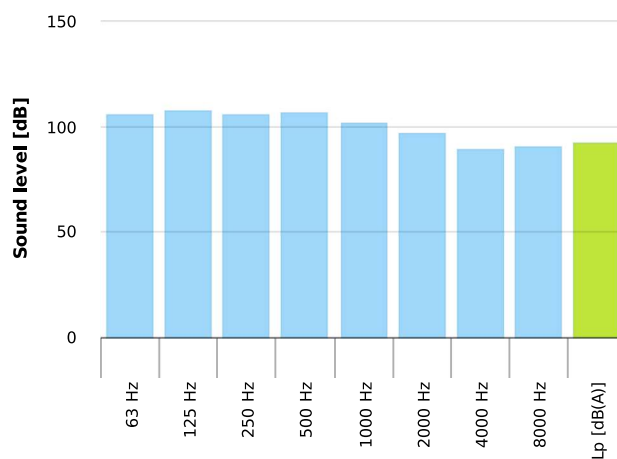
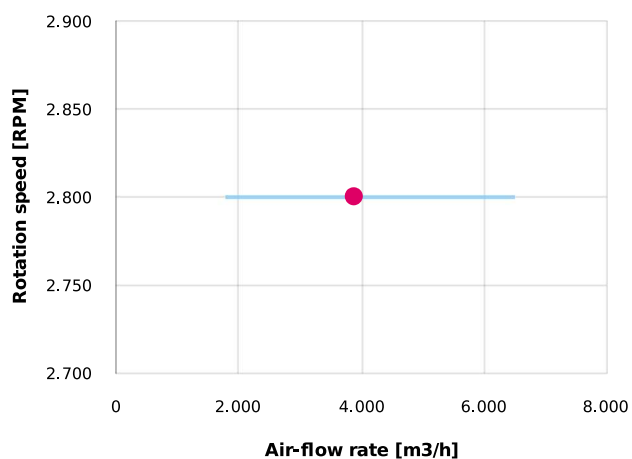
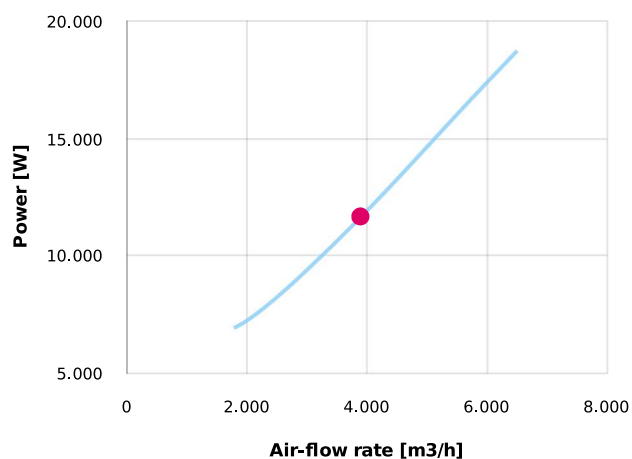
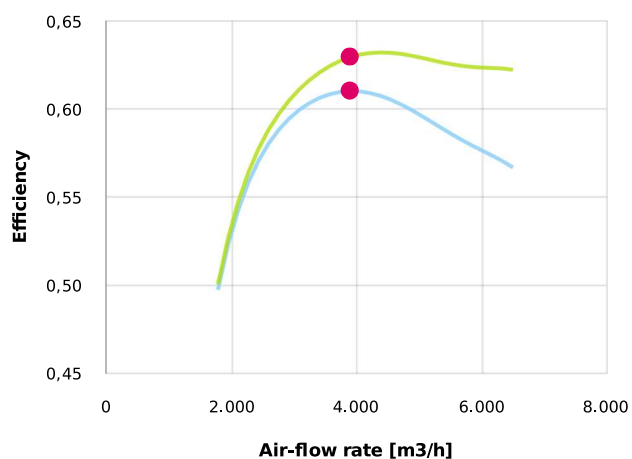
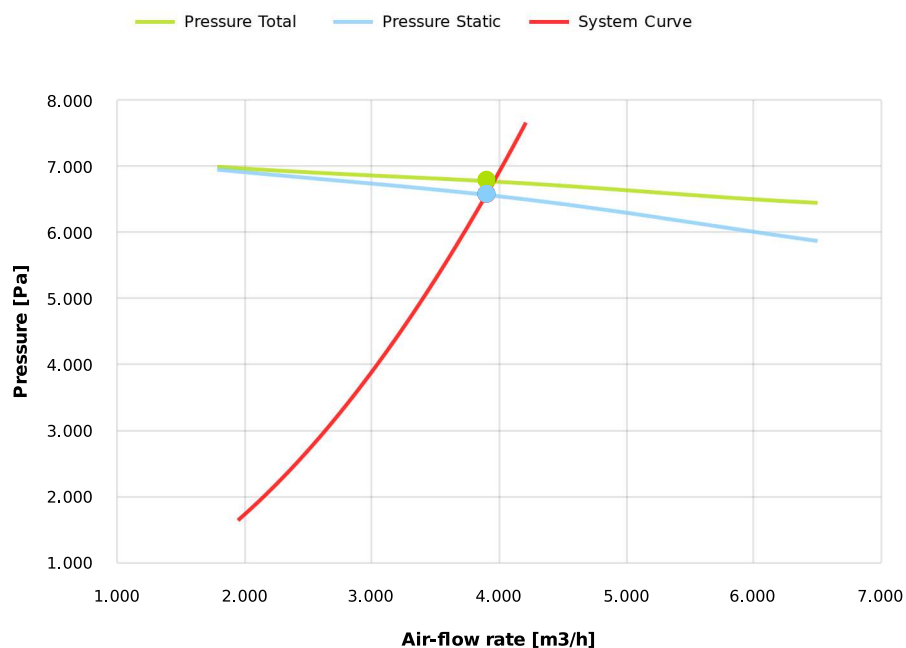


Table engines

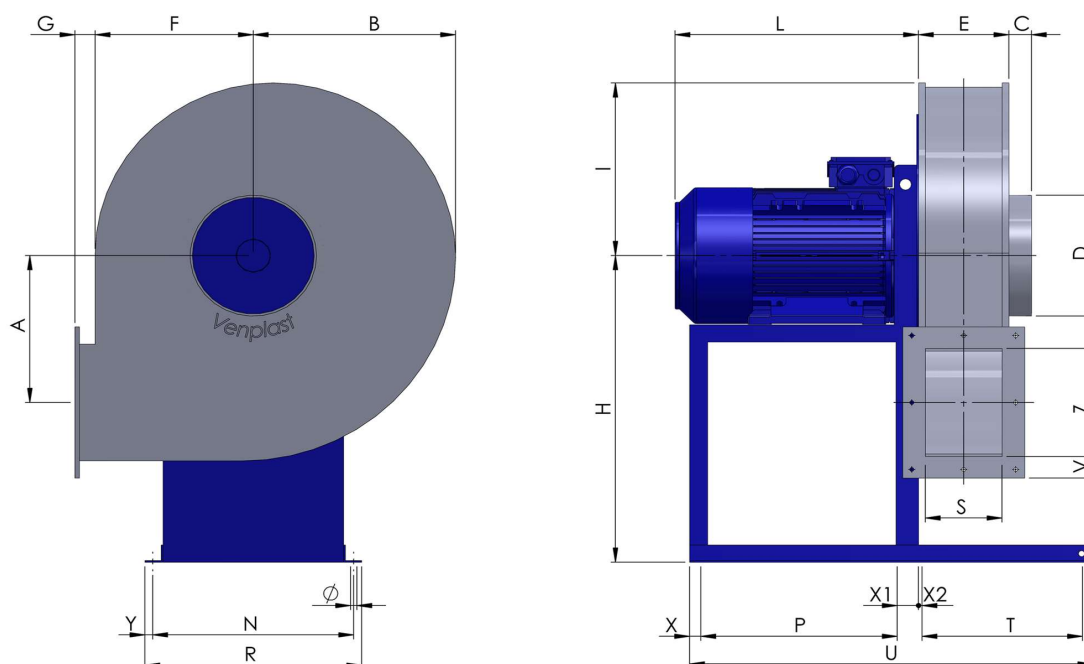
Class IE	IE1	IE2	IE3
Size	160M	160M	160M
Power[kW]	15	15	15
Current[A]	26.61	26.6	26.5
Voltage[V]	400	400	400
Cos φ	0.91	0.9	0.89
n	0.894	0.903	0.919

Working point

Q [m³/h]	3898
P_{sta} [Pa]	6566.
P_{tot} [Pa]	6773.
P_{in} [kW] [W]	11654
n_{sta}	0.61
n_{tot}	0.629
Rpm	2800











Dimensions








A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
380	485	50	280	240	465	50	800	446	539	549	11	520	585
S	T	U	V	X	X1	X2	Y	Z					
210	400	1030	50	25	40	15	18	280					

Configurations & cad

LG 0°

LG 45°

LG 90°

LG 135°

LG 180°

LG 225°

LG 270°

LG 315°

RD 0°

RD 45°

RD 90°

RD 135°

RD 180°

RD 225°

RD 270°

RD 315°
