


Research Data

Air-flow rate[m ³ /h]	4549
Pressure[Pa]	6414
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PAS632
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	195
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	15
IP	55
INS	


PAS632

PP welded housing - PP welded impeller - epoxy painted motor support - stainless steel screws

Certificazioni





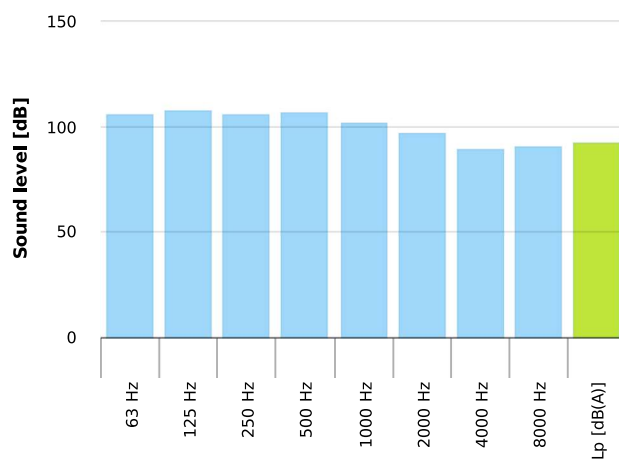


Table engines


Class IE	IE1	IE2	IE3
Size	160M	160M	160M
Power[kW]	15	15	15
Current[A]	26.61	26.6	26.5
Voltage[V]	400	400	400
Cos φ	0.91	0.9	0.89
n	0.894	0.903	0.919

Working point

Q [m³/h]	4549
P_{sta} [Pa]	6414
P_{tot} [Pa]	6697
P_{in} [kW] [W]	13394
n_{sta}	0.605
n_{tot}	0.631
Rpm	2800

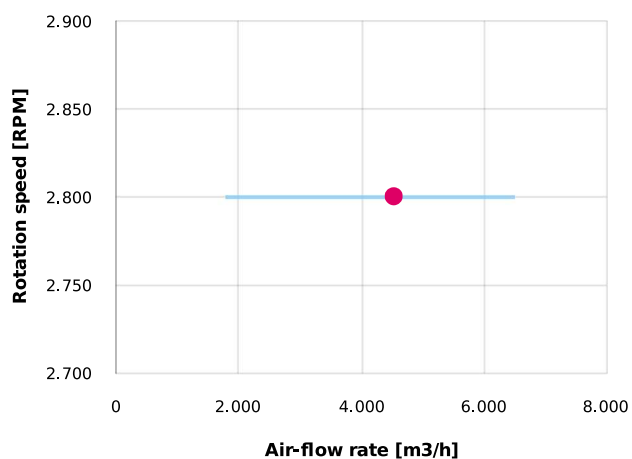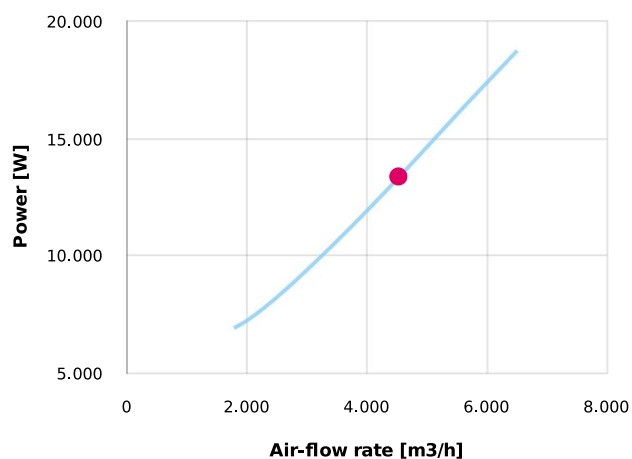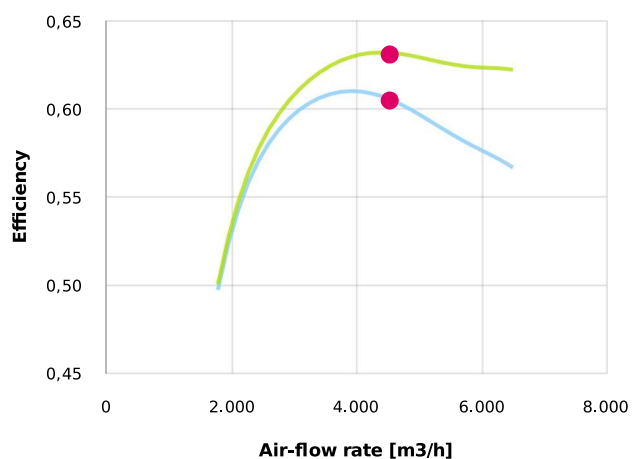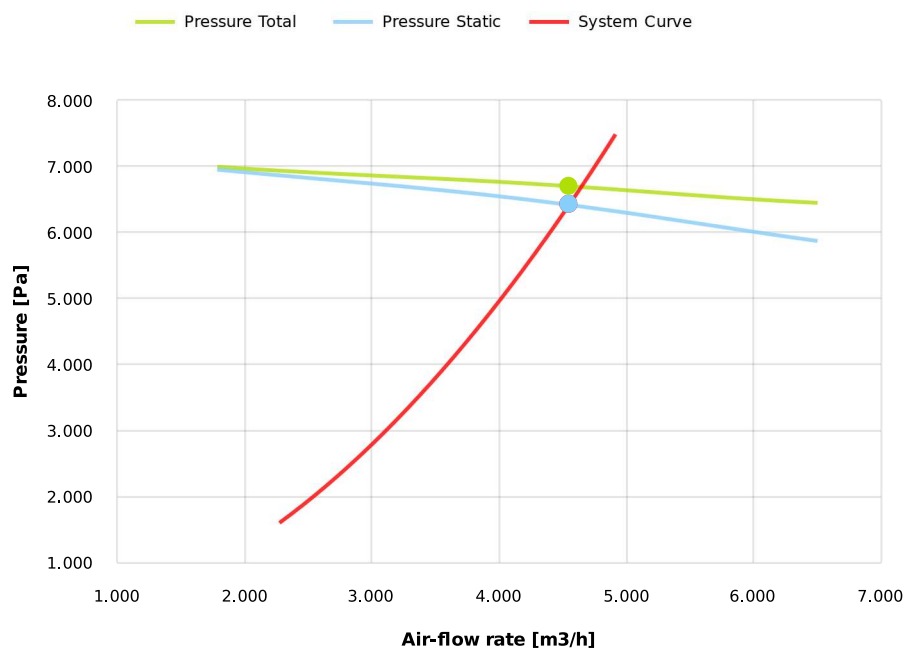

Dimensions

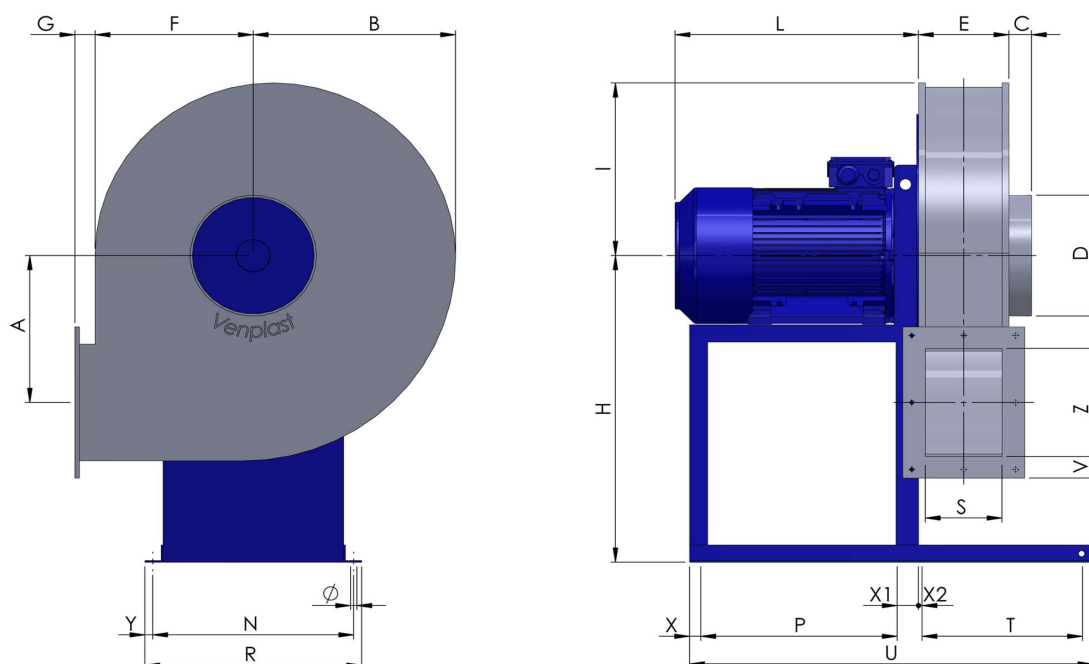

A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
380	485	50	280	240	465	50	800	446	539	549	11	520	585
S	T	U	V	X	X1	X2	Y	Z					
210	400	1030	50	25	40	15	18	280					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°



LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

