

Research Data


Air-flow rate[m ³ /h]	2271
Pressure[Pa]	389.8
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC506
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	62
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.18
IP	55
INS	

Table engines

Motors data are not available



PMM-Q506






PP welded housing - PP/INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





Working point

Q [m³/h]	2271
P_{sta} [Pa]	389.8
P_{tot} [Pa]	416.9
P_{in} [kW] [W]	389.9
n_{sta}	0.631
n_{tot}	0.675
Rpm	930

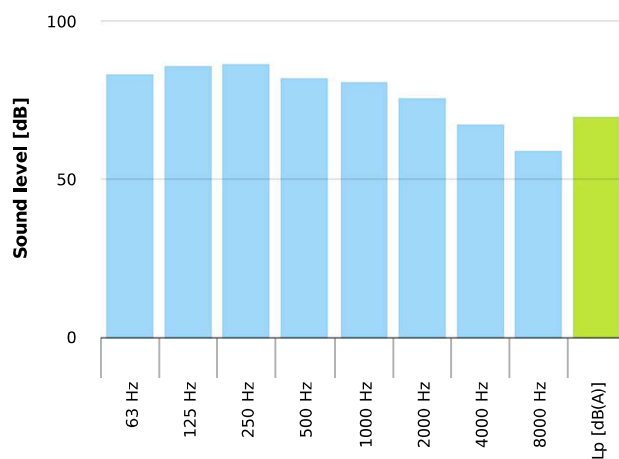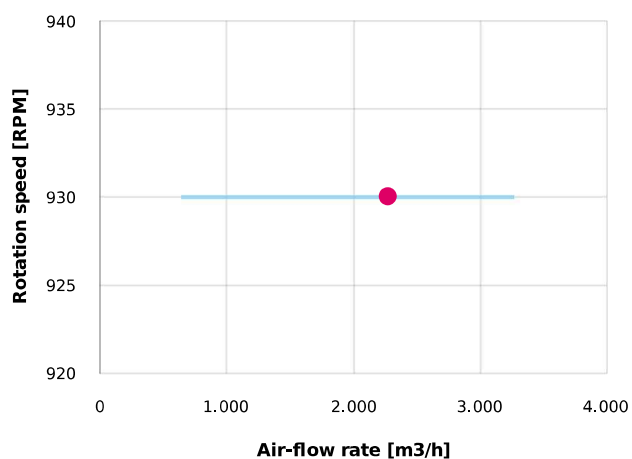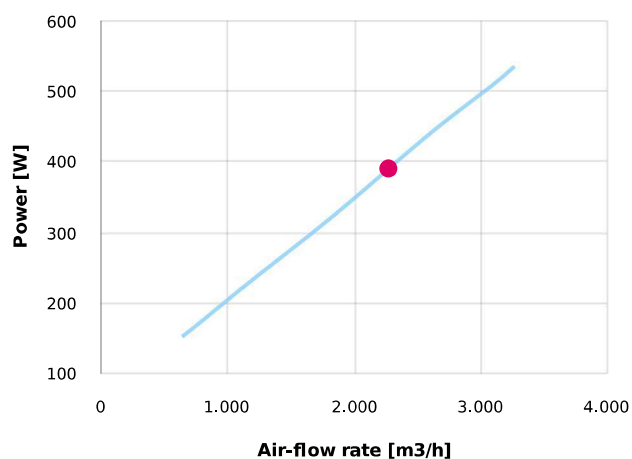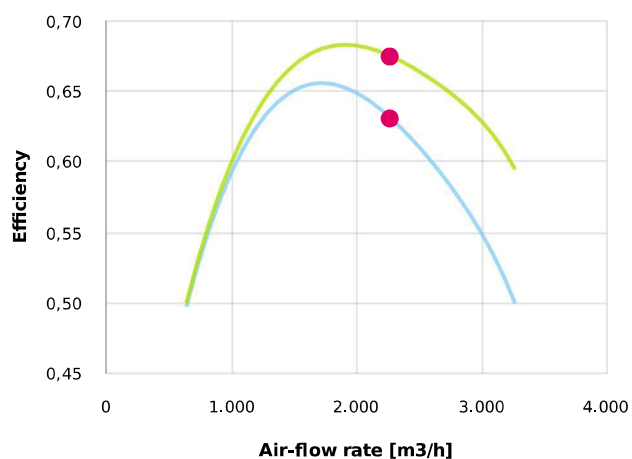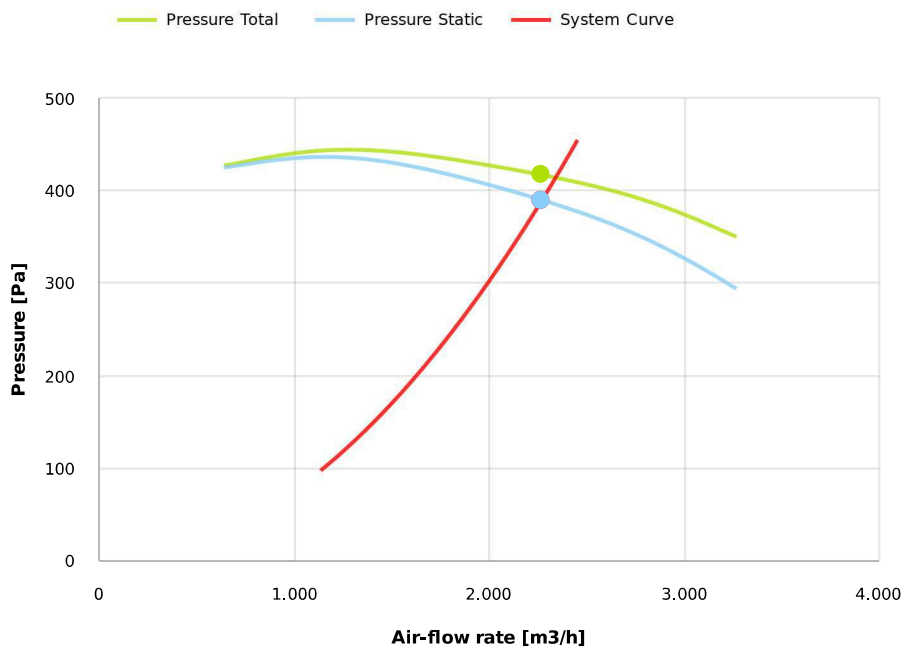


Dimensions

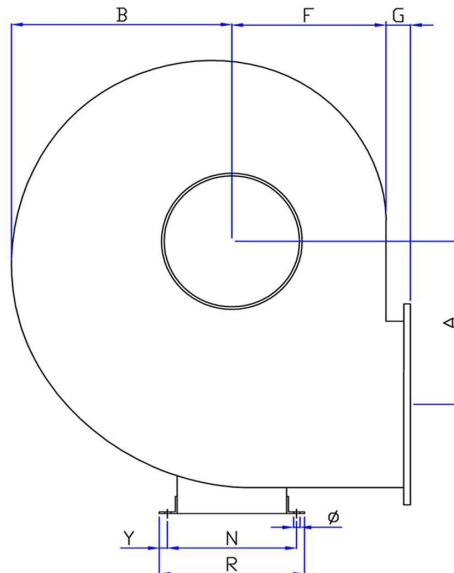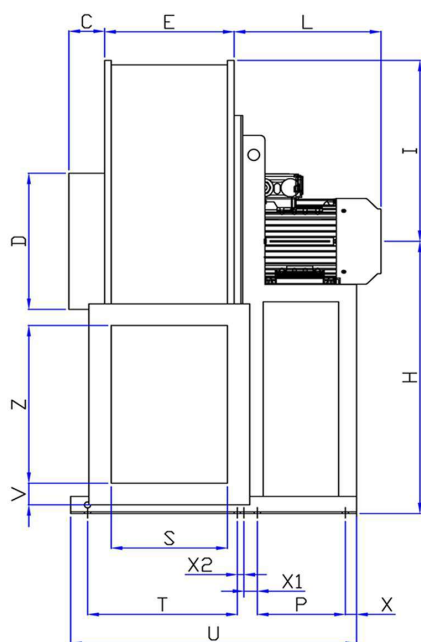


A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
337	390	80	315	280	450	50	630	395	250	289	14	197	325
S	T	U	V	X	X1	X2	Y	Z					
260	335	635	50	25	30	15	18	365					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

