


Research Data

Air-flow rate[m ³ /h]	5921
Pressure[Pa]	974.2
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC564
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	110
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	5.5
IP	55
INS	



PMM-Q564

PP welded housing - PP/INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





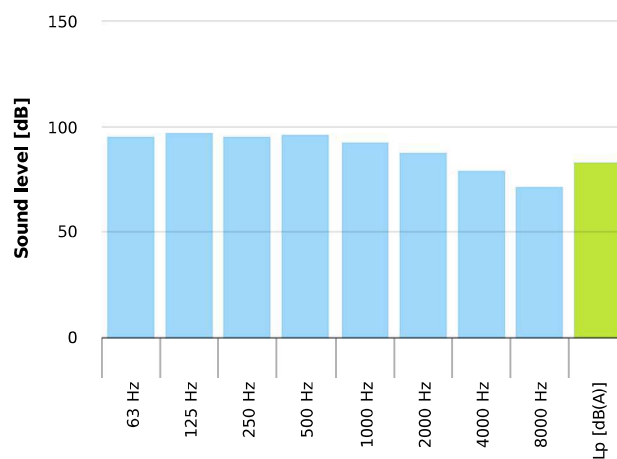


Table engines



Class IE	IE1	IE2	IE3
Size	132S	132S	132S
Power[kW]	5.5	5.5	5.5
Current[A]	11.03	11	10.6
Voltage[V]	400	400	400
Cos φ	0.84	0.82	0.84
n	0.857	0.877	0.896

Working point

Q [m ³ /h]	5921
P _{sta} [Pa]	974.2
P _{tot} [Pa]	1055.
P _{in} [kW] [W]	2928.
n _{sta}	0.546
n _{tot}	0.592
Rpm	1450

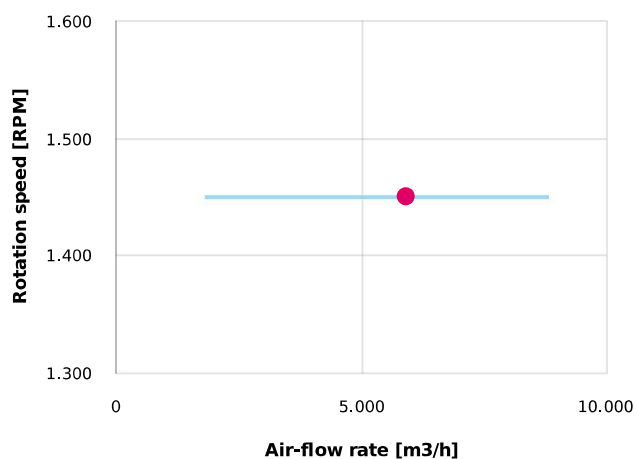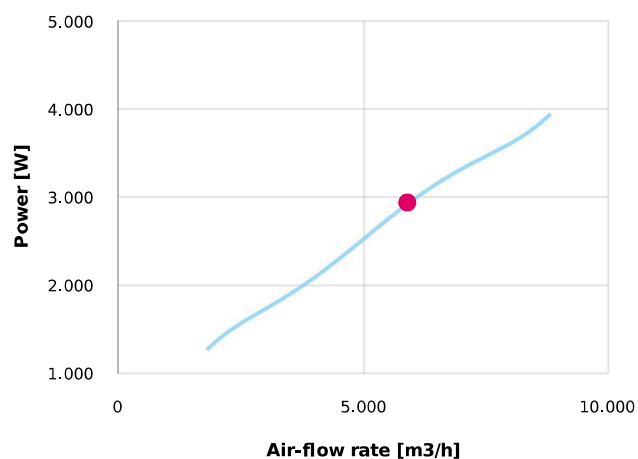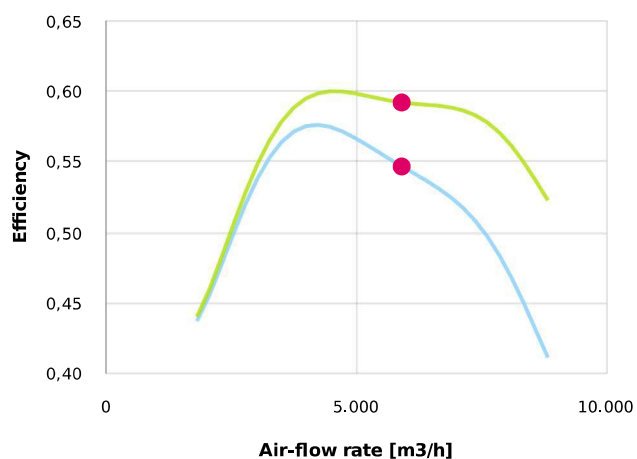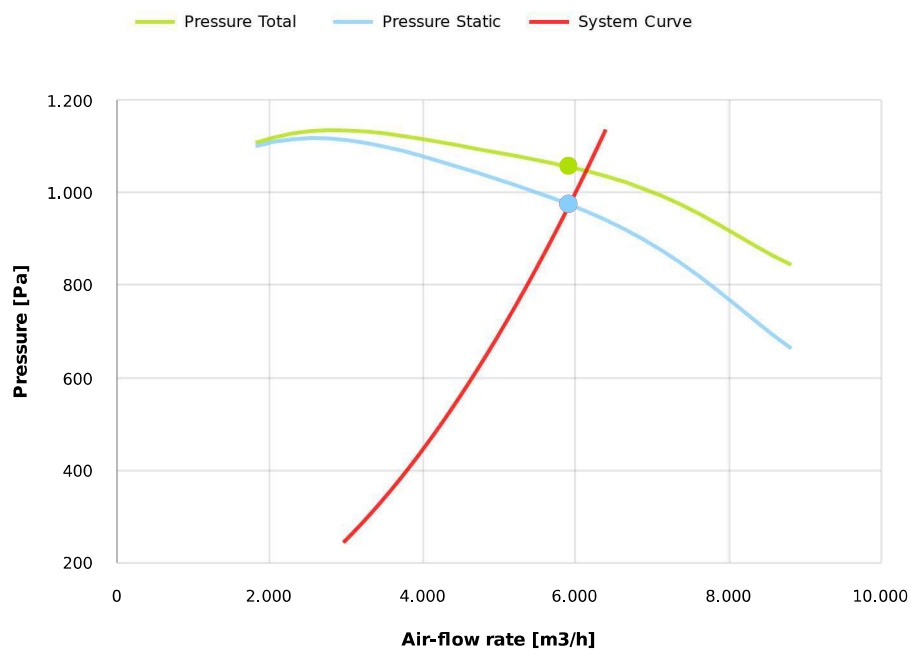


Dimensions

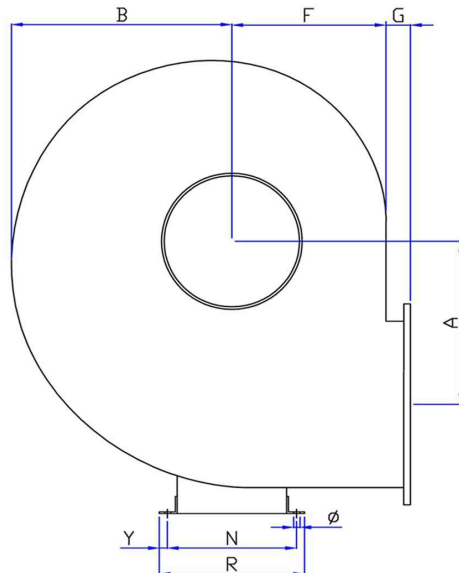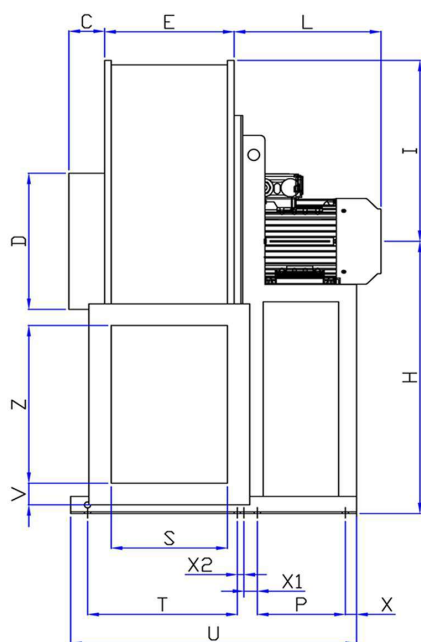


A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
416	560	80	400	330	388	50	710	445	340	445	14	437	481
S	T	U	V	X	X1	X2	Y	Z					
310	355	895	50	25	40	15	18	460					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

