


Research Data

Air-flow rate[m ³ /h]	8655
Pressure[Pa]	1177
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC634
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	112
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	7.5
IP	55
INS	



PMM-Q634

PP welded housing - PP/INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





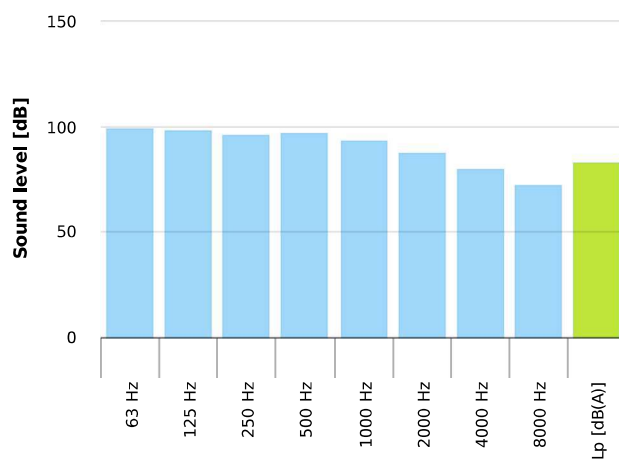


Table engines


Class IE	IE1	IE2	IE3
Size	132M	132M	132M
Power[kW]	7.5	7.5	7.5
Current[A]	14.64	14.5	14.1
Voltage[V]	400	400	400
Cos φ	0.85	0.84	0.85
n	0.87	0.887	0.904

Working point

Q [m³/h]	8655
P_{sta} [Pa]	1177.
P_{tot} [Pa]	1318.
P_{in} [kW] [W]	5408.
n_{sta}	0.523
n_{tot}	0.586
Rpm	1450

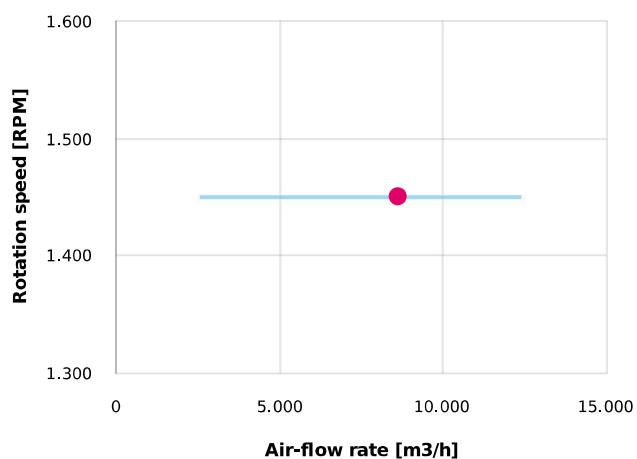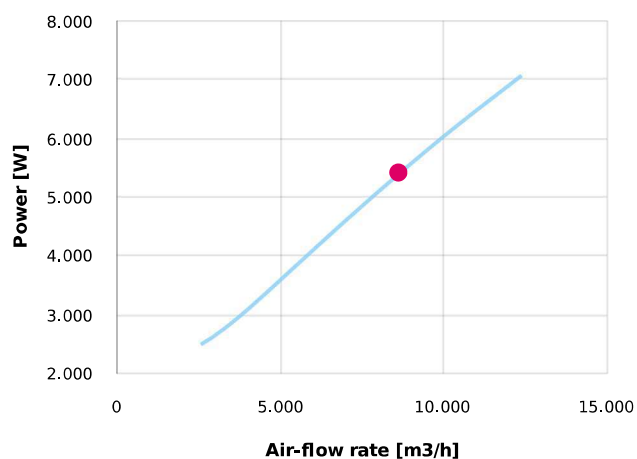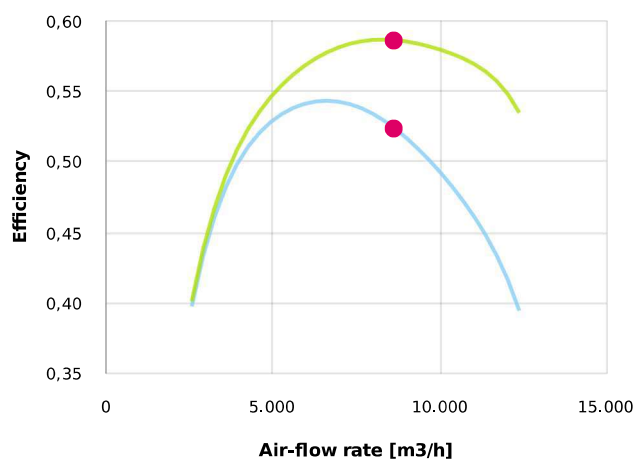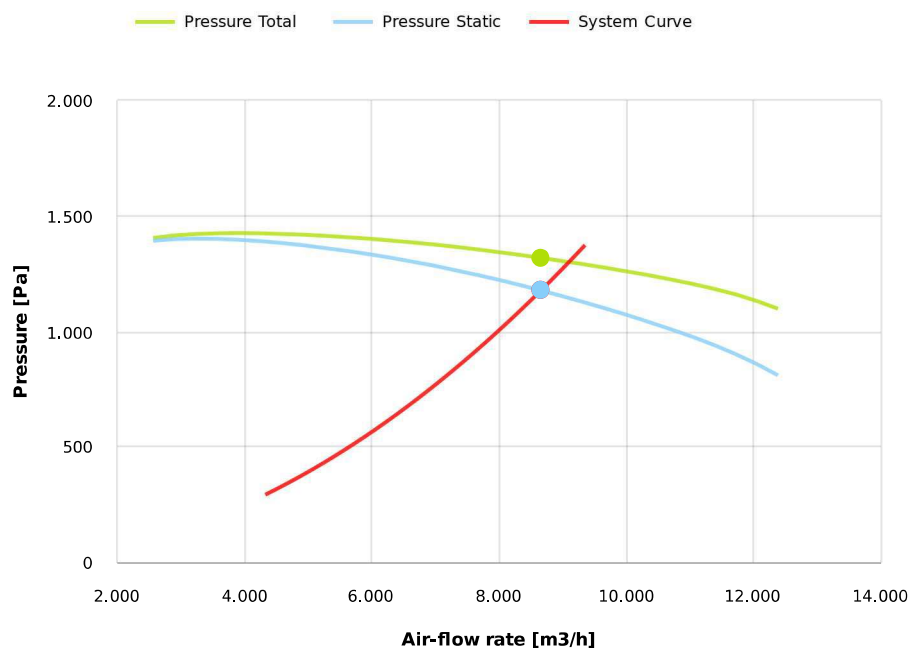


Dimensions

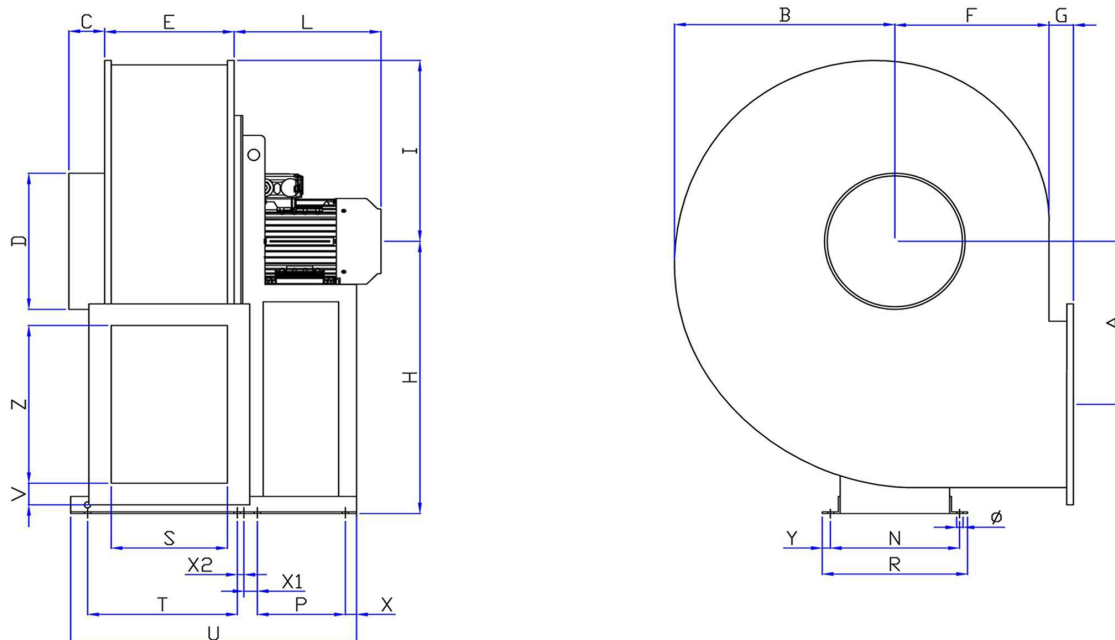


A	B	C	D	E	F	G	H	I	L	N	Ø	P	R
406	573	80	450	350	418	50	800	492	420	337	14	270	373
S	T	U	V	X	X1	X2	Y	Z					
330	400	773	50	25	40	15	18	480					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

