


Research Data

Air-flow rate[m ³ /h]	12420
Pressure[Pa]	1579
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC714
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	511
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	11
IP	55
INS	



PMM-Q714

PP welded housing - PP/INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





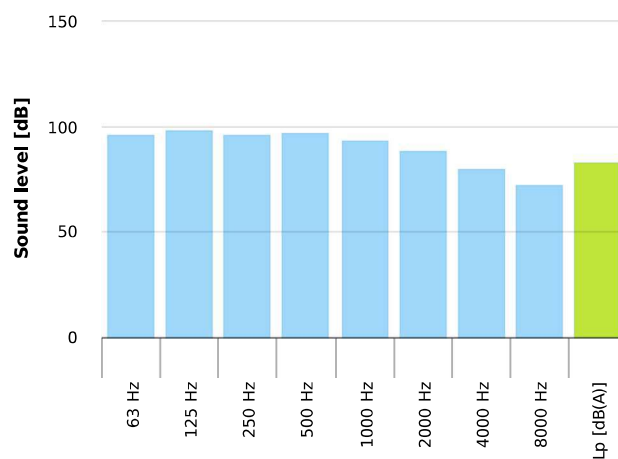


Table engines


Class IE	IE1	IE2	IE3
Size	160M	160M	160M
Power[kW]	11	11	11
Current[A]	20.64	21	20.4
Voltage[V]	400	400	400
Cos φ	0.86	0.84	0.85
n	0.884	0.898	0.914

Working point

Q [m ³ /h]	12420
P _{sta} [Pa]	1579.
P _{tot} [Pa]	1616.
P _{in} [kW] [W]	9413.
n _{sta}	0.578
n _{tot}	0.592
Rpm	1450

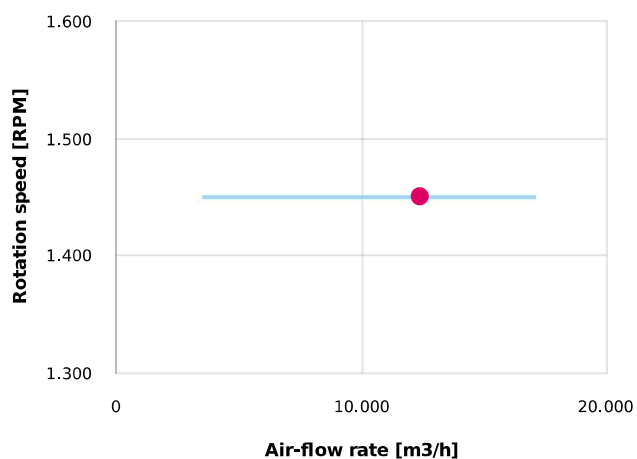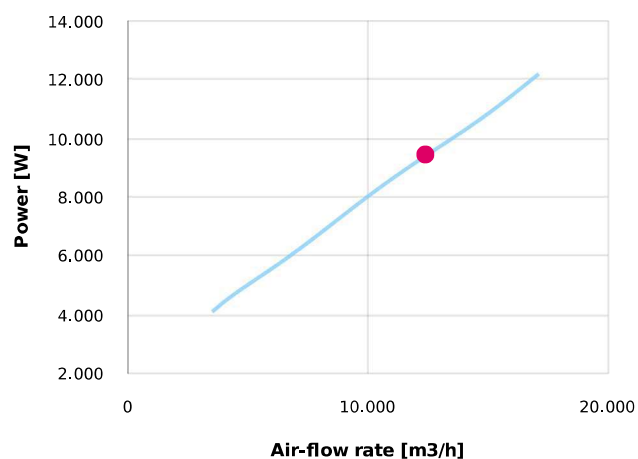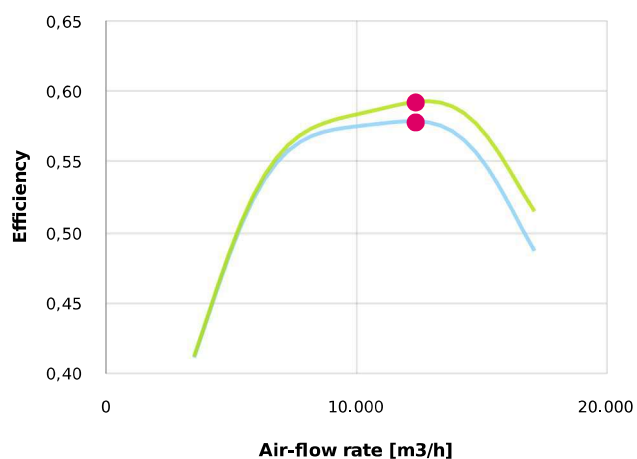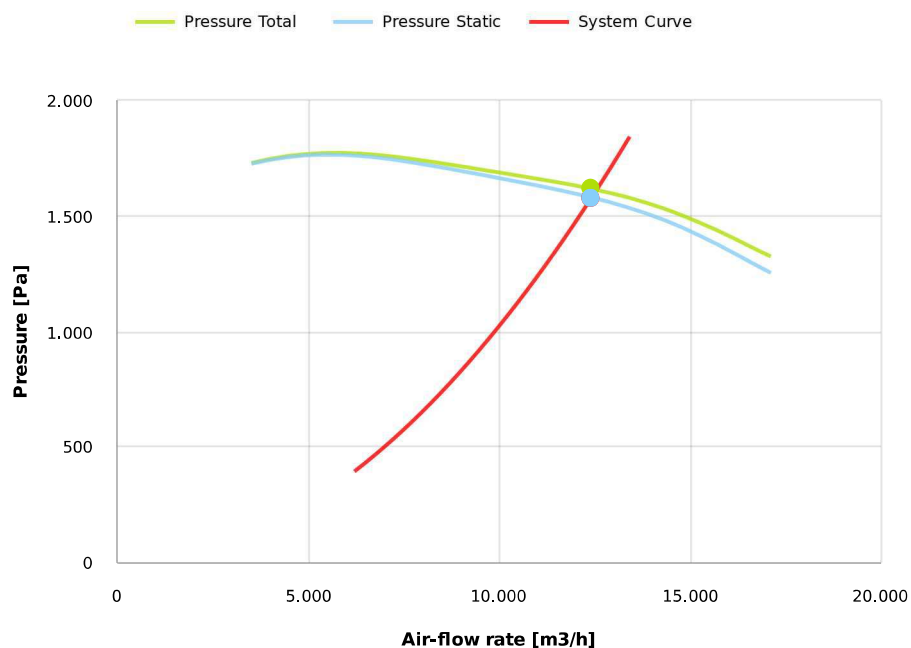

Dimensions

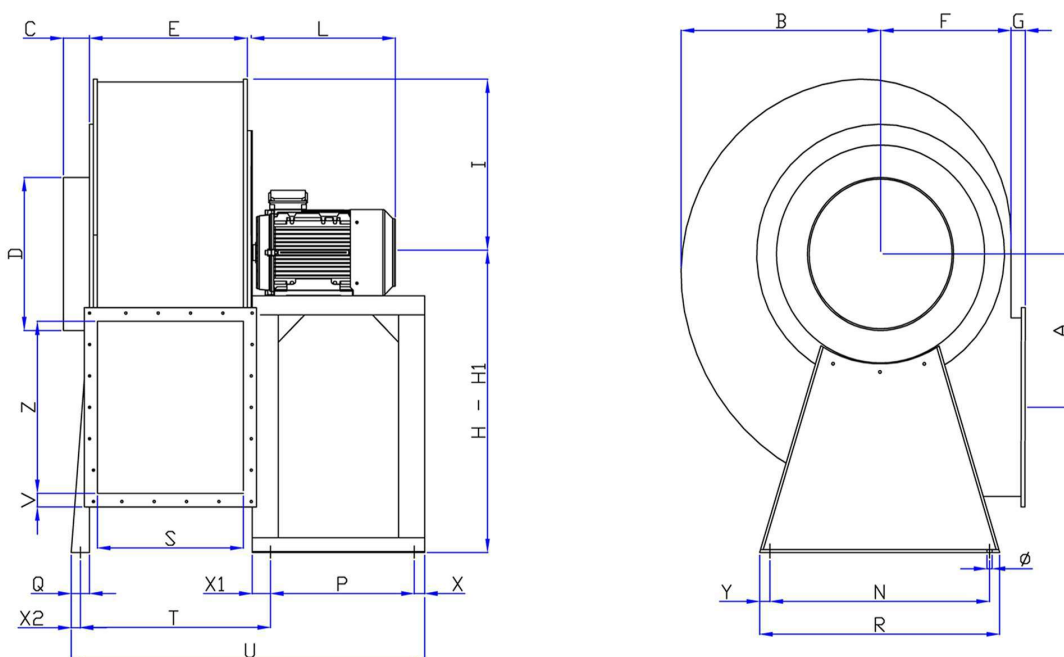


A	B	C	D	E	F	G	H	H1	I	L	N	Ø	P
527	690	100	500	430	450	50	850	700	571	550	772	20	551
Q	R	S	T	U	V	X	X1	X2	Y	Z			
60	850	420	560	1300	50	40	60	30	40	520			

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°



LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

