


Research Data

Air-flow rate[m ³ /h]	17667
Pressure[Pa]	2085
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC804
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	583
Frequency[Hz]	50
Speed[rpm]	1450
Power[kW]	30
IP	55
INS	



PMM-Q804

PP welded housing - PP/INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





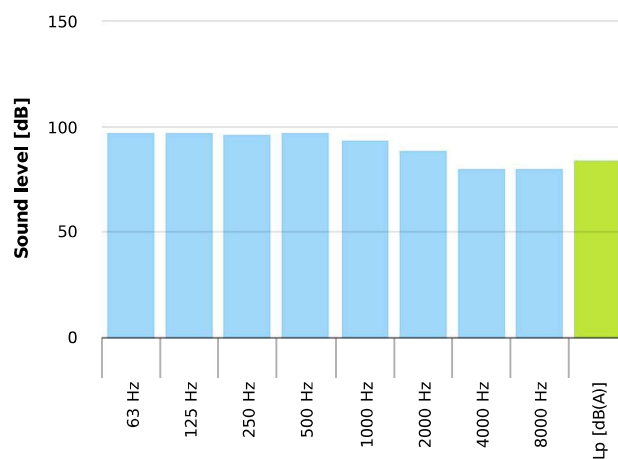


Table engines


Class IE	IE1	IE2	IE3
Size	200L	200L	200L
Power[kW]	30	30	30
Current[A]	54.7	54.6	52.6
Voltage[V]	400	400	400
Cos φ	0.86	0.86	0.88
n	0.92	0.923	0.936

Working point

Q [m ³ /h]	17667
P _{sta} [Pa]	2085.
P _{tot} [Pa]	2138.
P _{in} [kW] [W]	17689
n _{sta}	0.577
n _{tot}	0.592
Rpm	1450

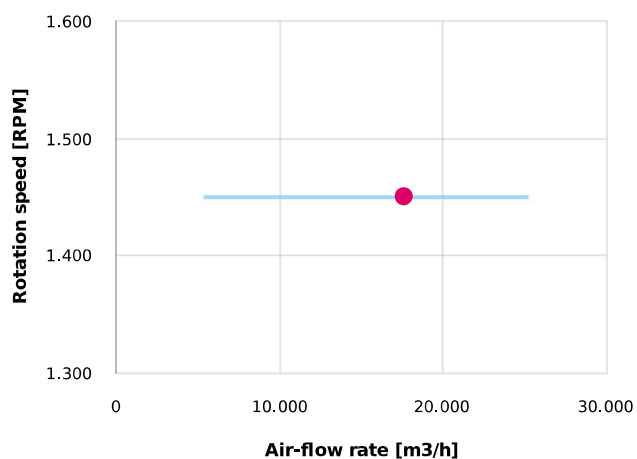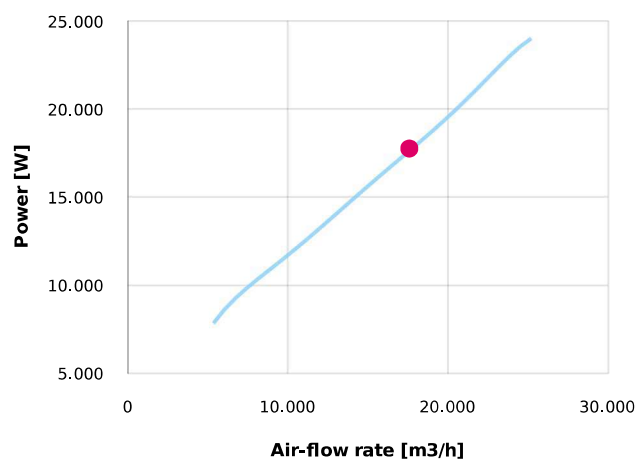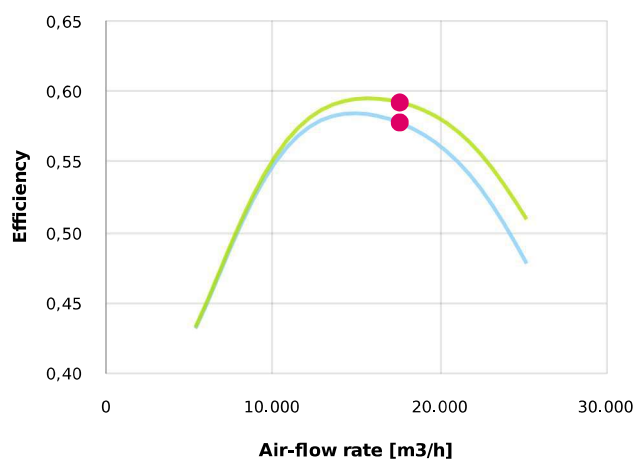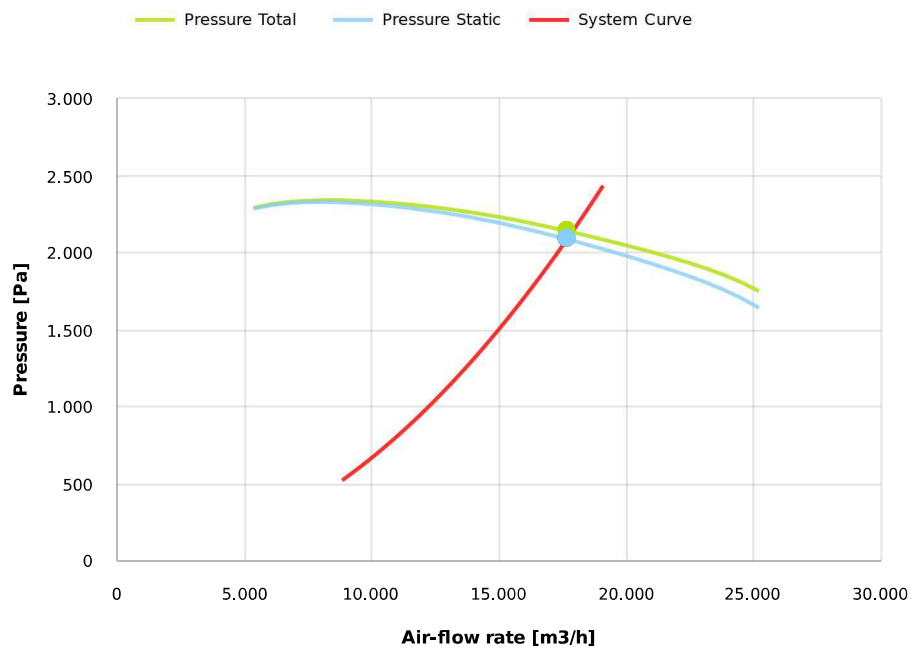

Dimensions

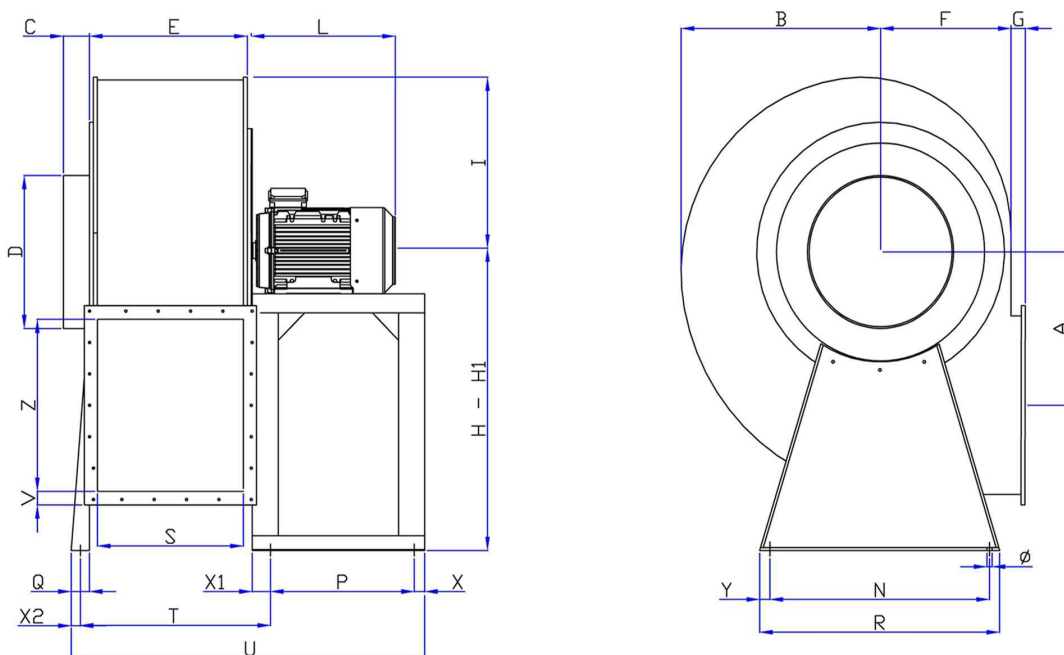


A	B	C	D	E	F	G	H	H1	I	L	N	Ø	P
591	760	100	560	480	490	50	950	780	640	640	862	20	551
Q	R	S	T	U	V	X	X1	X2	Y	Z			
60	925	470	690	1319	50	40	60	30	40	570			

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°



LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

