

Research Data


Air-flow rate[m ³ /h]	182
Pressure[Pa]	119.3
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC204
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	9
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.12
IP	55
INS	

Table engines

Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.47
Voltage[V]	400
Cos φ	0.64
n	0.57


PMM204






Pe moulded housing - PP impeller - Epoxy painted motor support - Stainless steel screws

Certificazioni





Working point

Q [m ³ /h]	182
P _{sta} [Pa]	119.3
P _{tot} [Pa]	121.9
P _{in} [kW] [W]	10.63
n _{sta}	0.567
n _{tot}	0.579
Rpm	1370

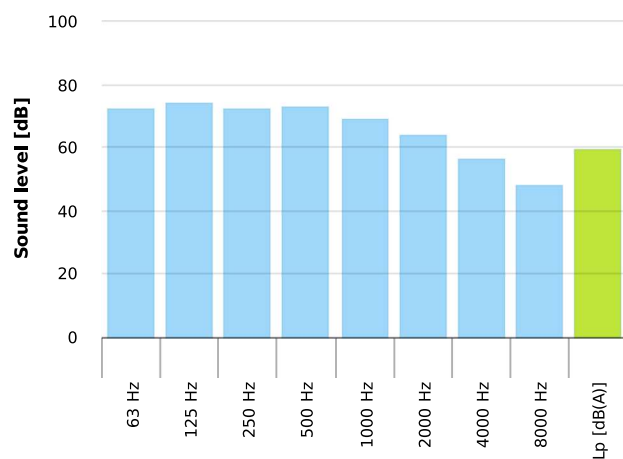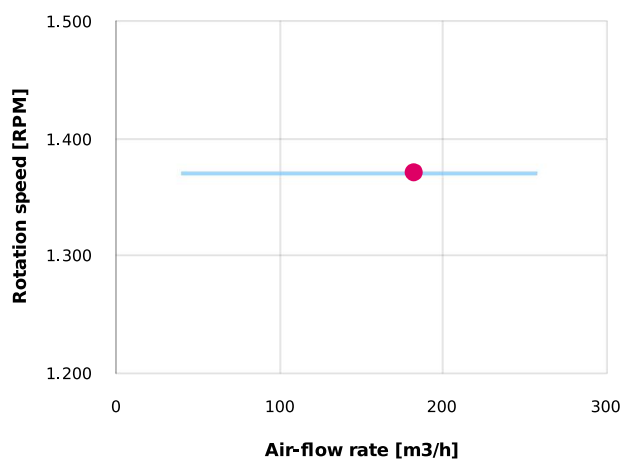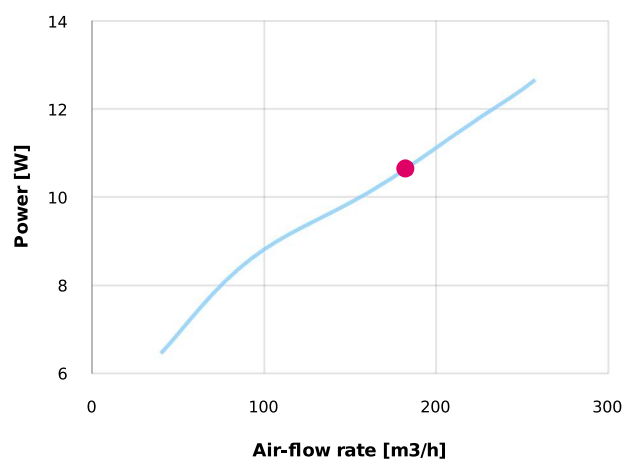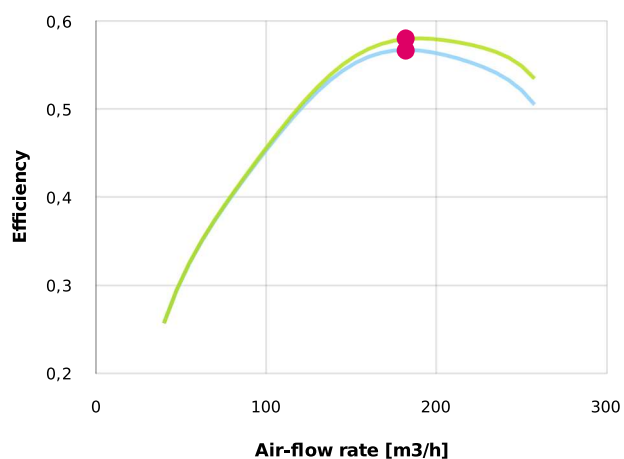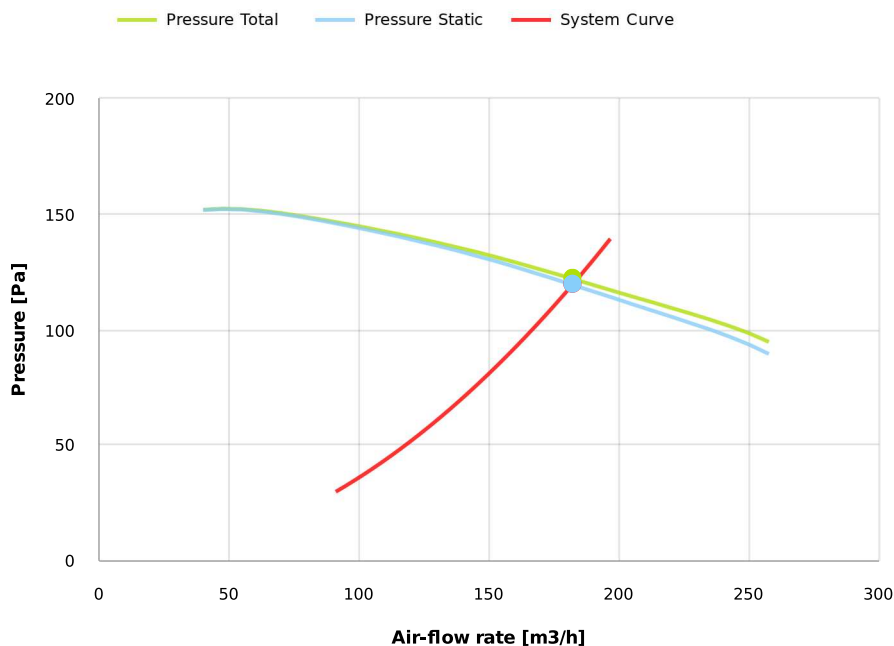


Dimensions

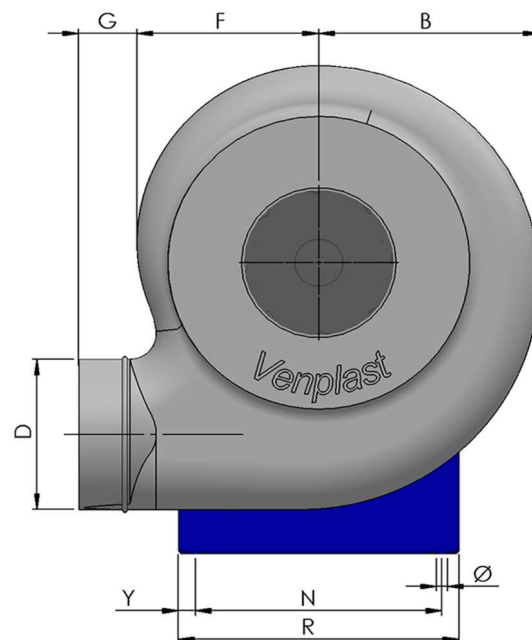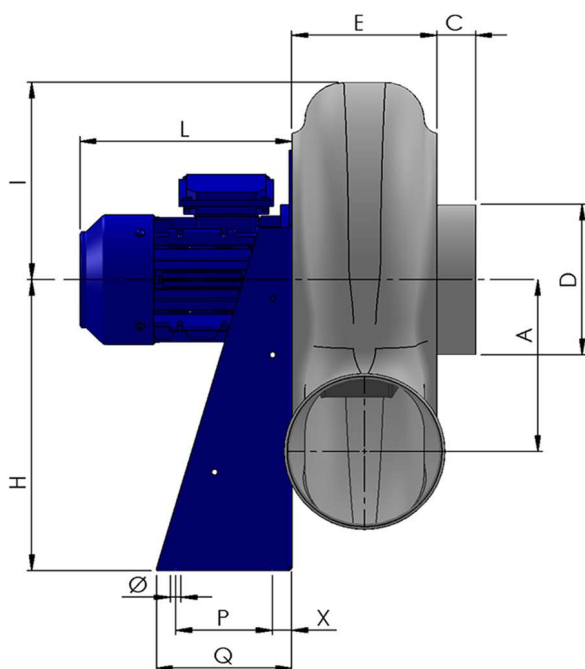


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
142	187	40	125	120	150	60	250	165	195	200	11	100	140
R				X				Y					
235				20				17.5					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

