

Research Data


Air-flow rate[m ³ /h]	539.6
Pressure[Pa]	231.3
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC284
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	14
Frequency[Hz]	50
Speed[rpm]	1370
Power[kW]	0.18
IP	55
INS	

Table engines

Class IE	IE1
Size	63
Power[kW]	0.18
Current[A]	0.68
Voltage[V]	400
Cos φ	0.65
n	0.59



PMM284






Pe moulded housing - PP impeller - Epoxy painted motor support - Stainless steel screws

Certificazioni




Working point

Q [m ³ /h]	539.6
P _{sta} [Pa]	231.3
P _{tot} [Pa]	236.7
P _{in} [kW] [W]	65.46
n _{sta}	0.529
n _{tot}	0.542
Rpm	1370

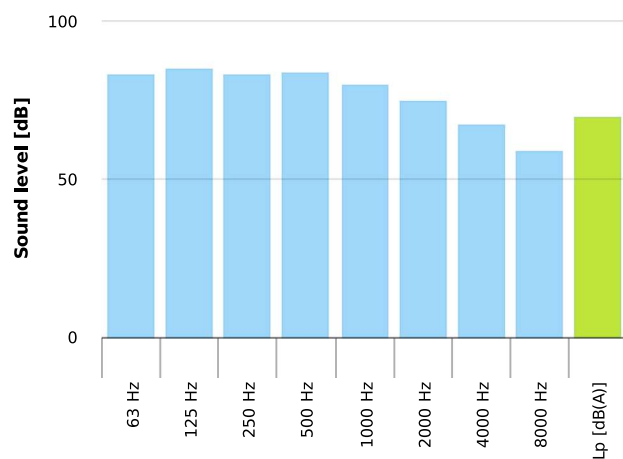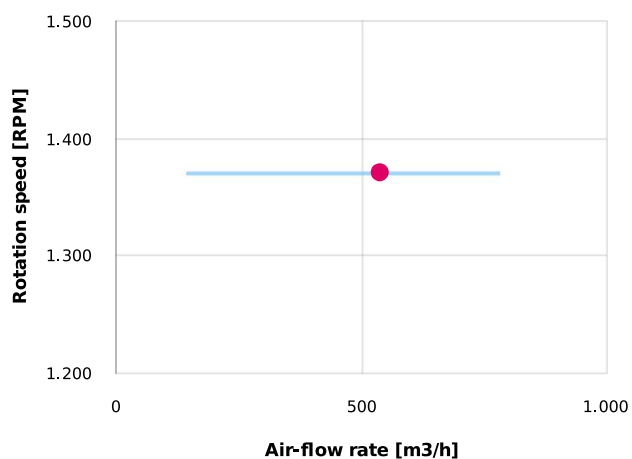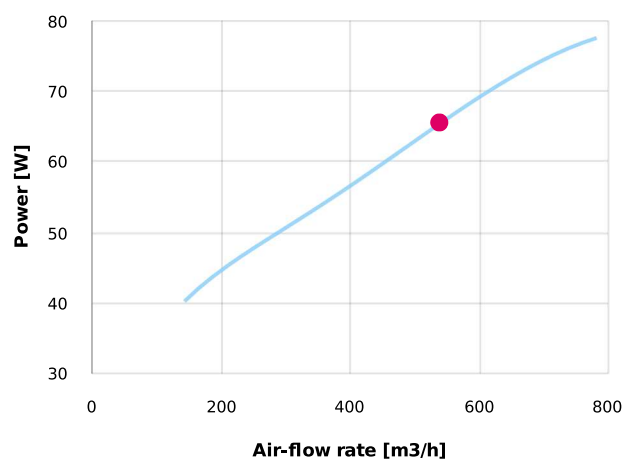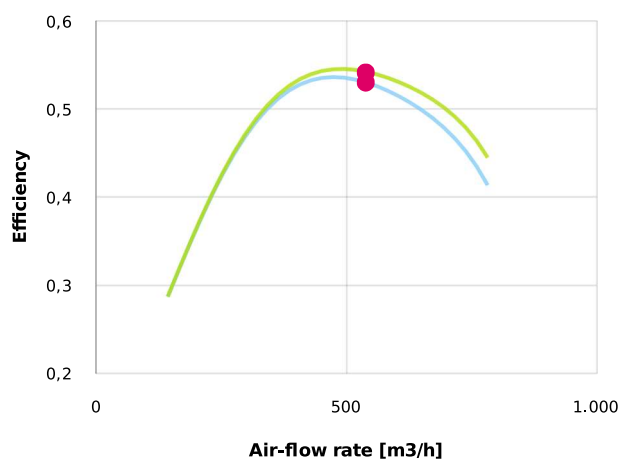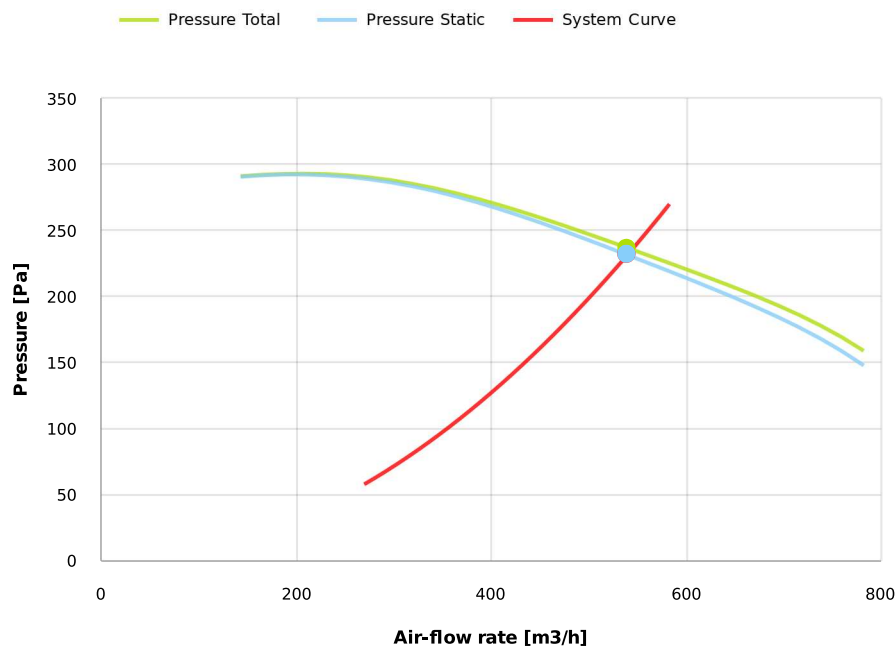

Dimensions

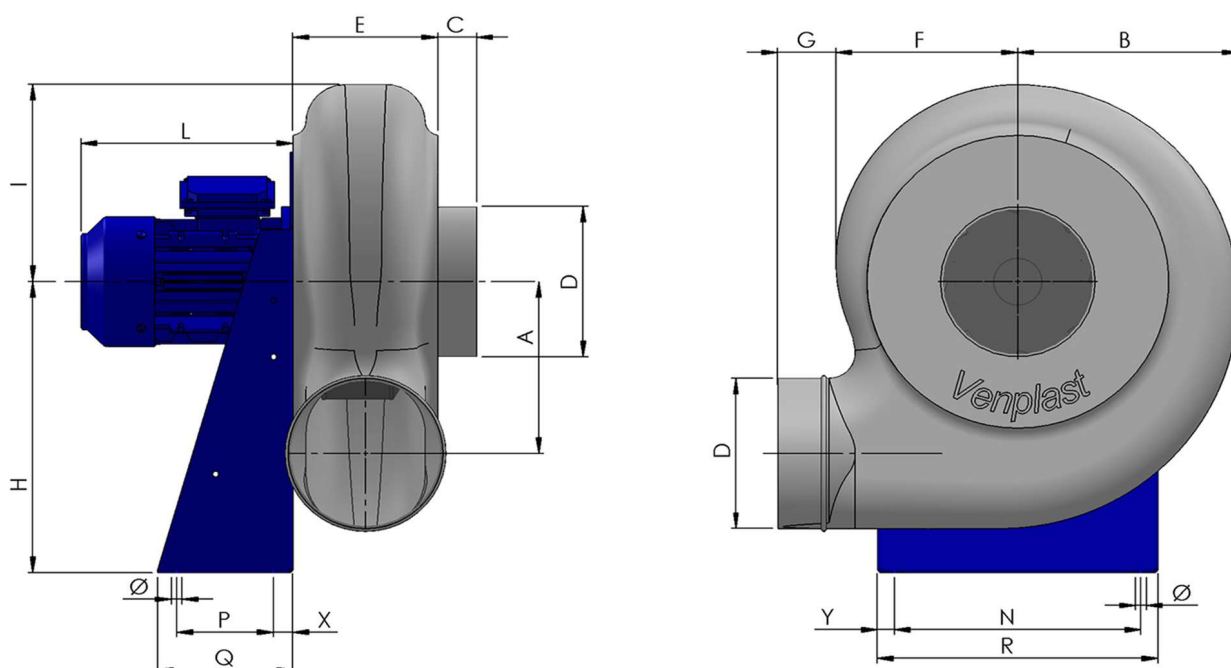

A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
208	274	40	180	160	204	60	350	230	190	277	11	120	190
R				X				Y					
316				35				18					

Configurations & cad

