

Research Data


Air-flow rate[m ³ /h]	633.8
Pressure[Pa]	155.5
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC316
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	19
Frequency[Hz]	50
Speed[rpm]	930
Power[kW]	0.12
IP	55
INS	

Table engines

Class IE	IE1
Size	63
Power[kW]	0.12
Current[A]	0.62
Voltage[V]	400
Cos φ	0.62
n	0.45



PMM316





Pe moulded housing - PP impeller - Epoxy painted motor support - Stainless steel screws

Certificazioni





Working point

Q [m ³ /h]	633.8
P _{sta} [Pa]	155.5
P _{tot} [Pa]	160.4
P _{in} [kW] [W]	41.77
n _{sta}	0.654
n _{tot}	0.675
Rpm	930

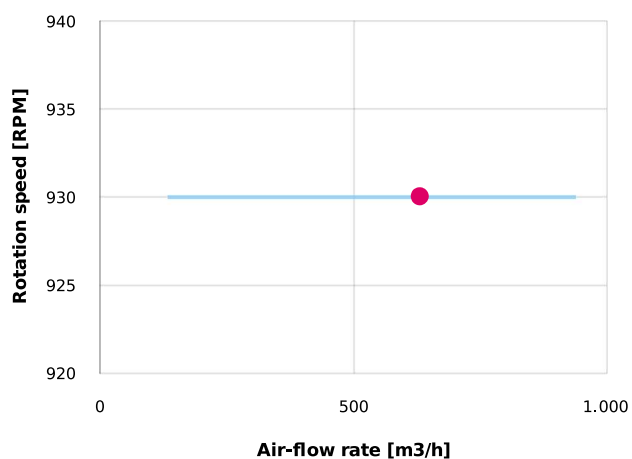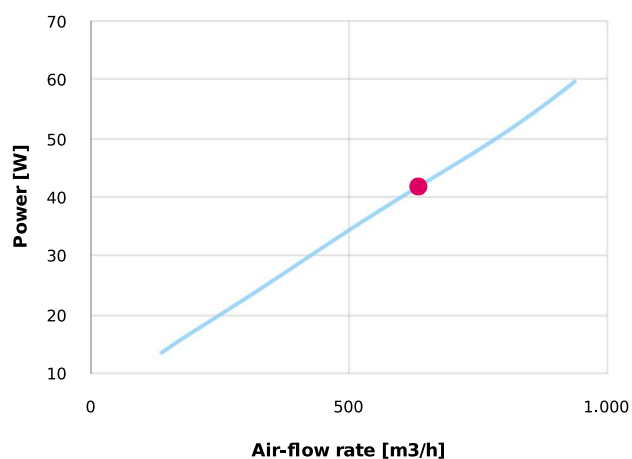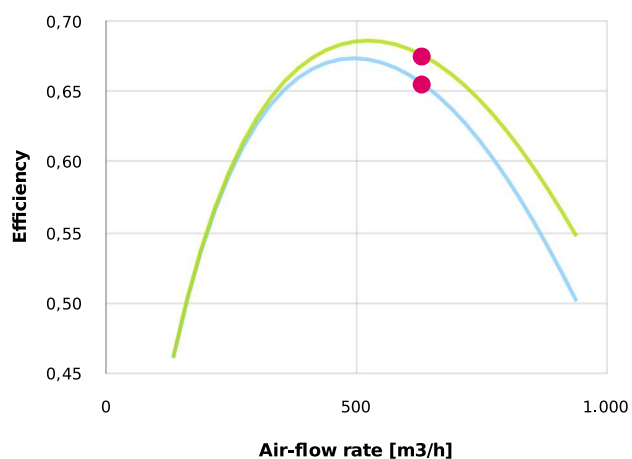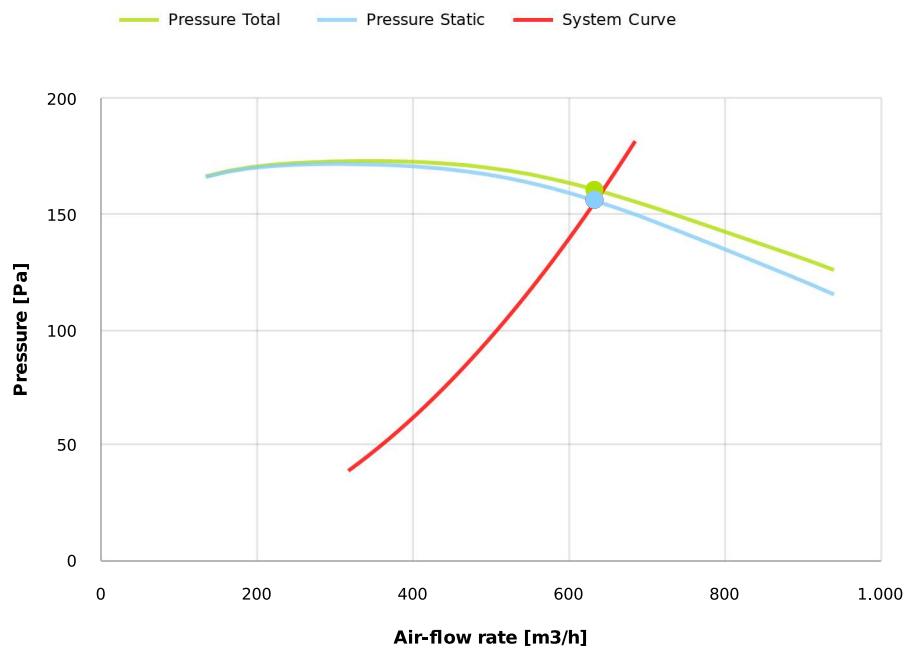


Dimensions

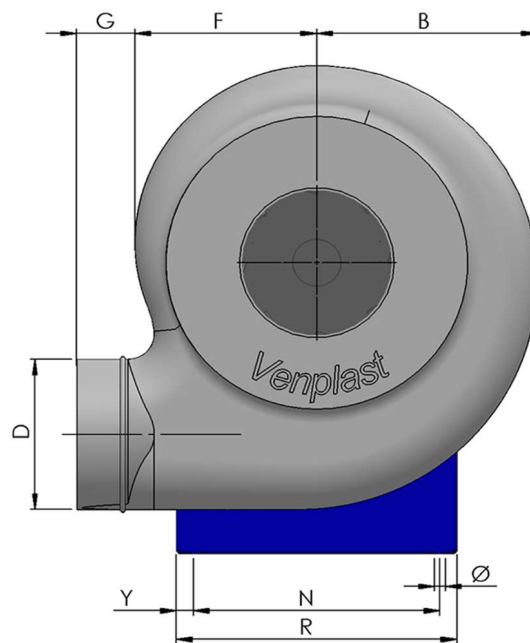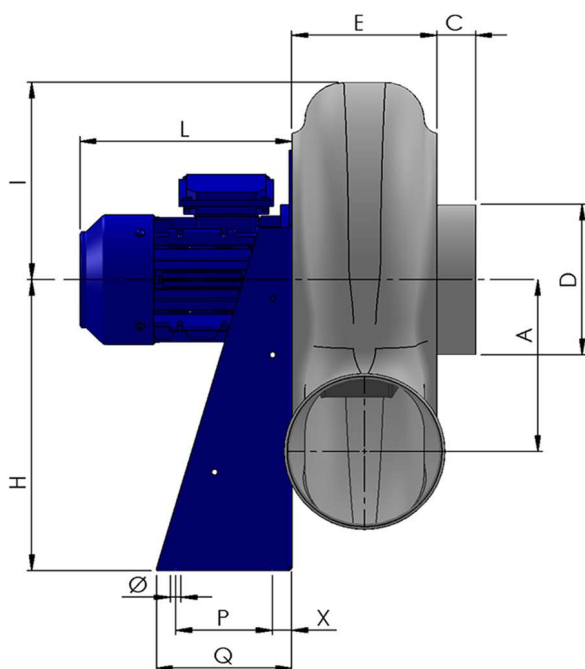


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
230	310	40	200	170	220	60	410	245	210	320	11	150	230
R				X				Y					
355				40				17.5					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

