


Research Data

Air-flow rate[m ³ /h]	1651
Pressure[Pa]	596.4
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC404
Voltage[V]	400
Phases	3
Current[A]	
Poles	4
Weight[kg]	33
Frequency[Hz]	50
Speed[rpm]	1410
Power[kW]	0.75
IP	55
INS	



PMM404

Pe moulded housing - PP impeller - Epoxy painted motor support - Stainless steel screws

Certificazioni





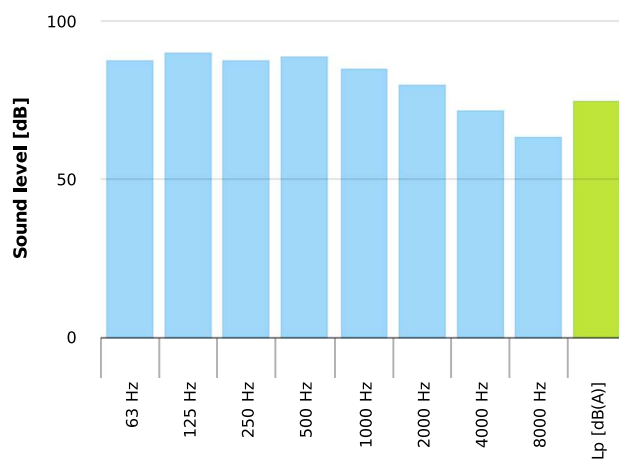


Table engines



Class IE	IE1	IE2	IE3
Size	80	80	80
Power[kW]	0.75	0.75	0.75
Current[A]	1.93	1.81	1.9
Voltage[V]	400	400	400
Cos φ	0.78	0.75	0.7
n	0.72	0.796	0.825

Working point

Q [m ³ /h]	1651
P _{sta} [Pa]	596.4
P _{tot} [Pa]	609.7
P _{in} [kW] [W]	413.3
n _{sta}	0.662
n _{tot}	0.677
Rpm	1410

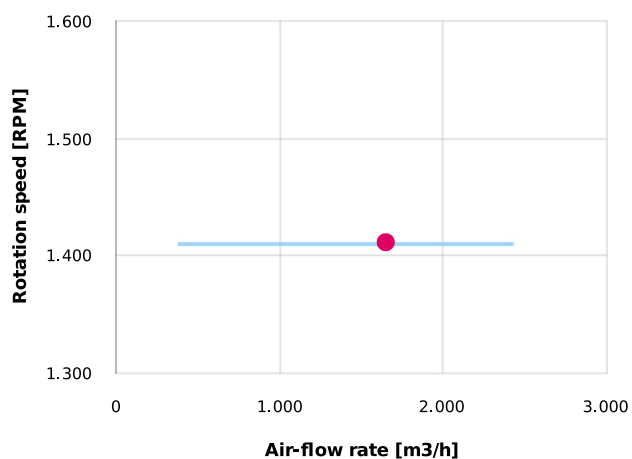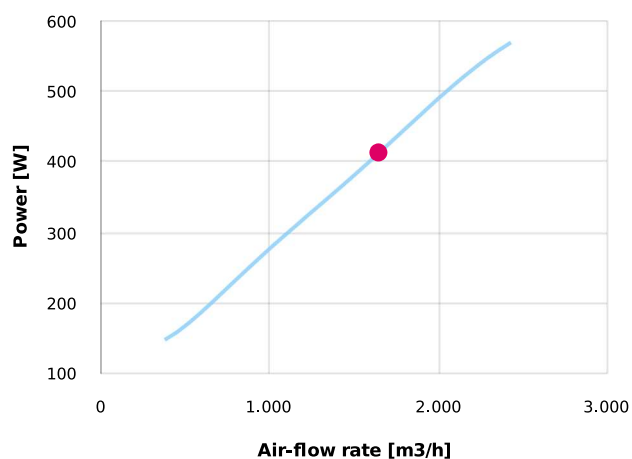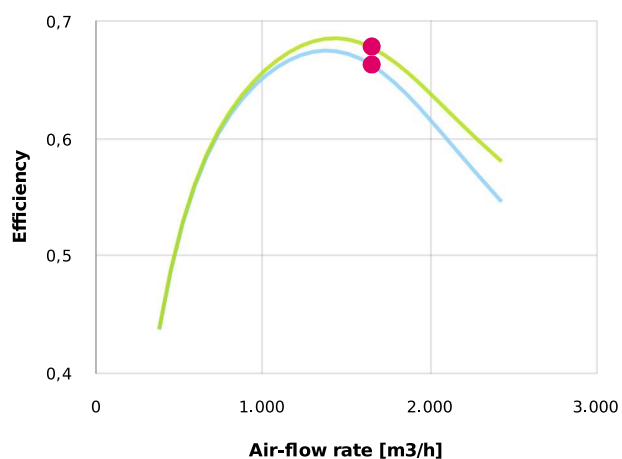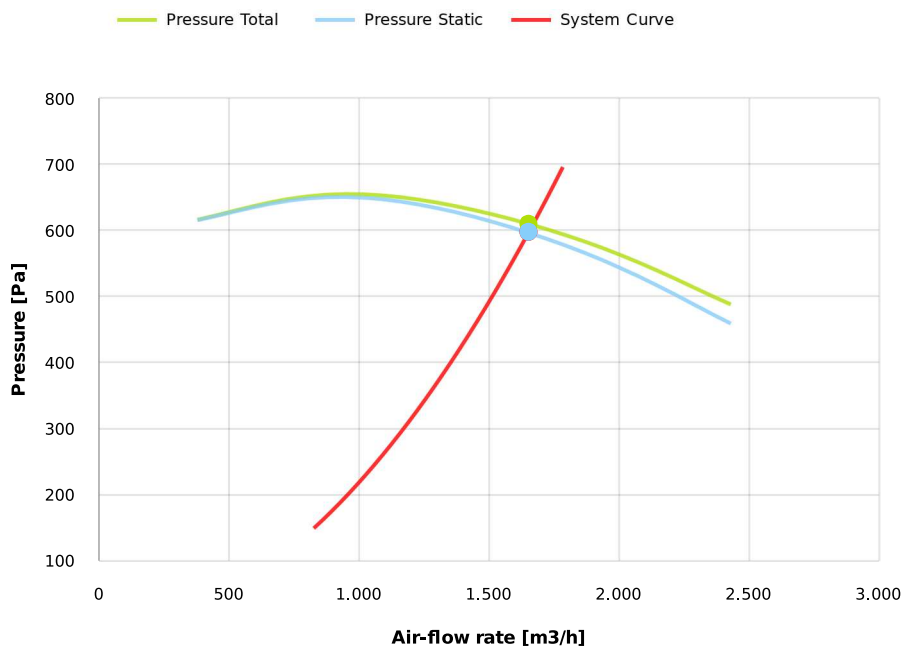


Dimensions

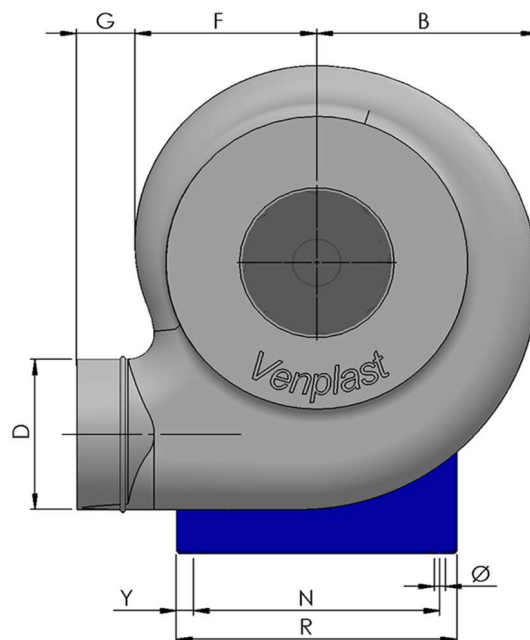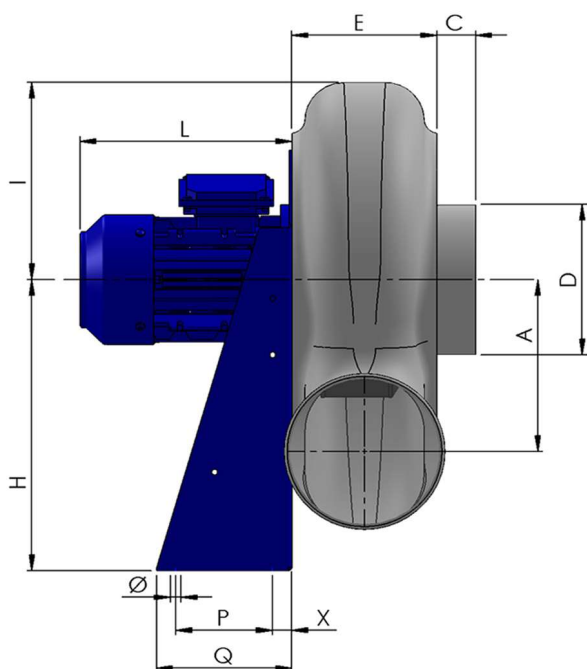


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	380	40	250	194	265	80	495	330	240	330	11	170	250
R				X				Y					
365				40				20					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

