

Research Data


Air-flow rate[m ³ /h]	1077
Pressure[Pa]	253.9
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PC406
Voltage[V]	400
Phases	3
Current[A]	
Poles	6
Weight[kg]	30
Frequency[Hz]	50
Speed[rpm]	920
Power[kW]	0.25
IP	55
INS	

Table engines

Class IE	IE1
Size	71
Power[kW]	0.25
Current[A]	0.87
Voltage[V]	400
Cos φ	0.7
n	0.59



PMM406






Pe moulded housing - PP impeller - Epoxy painted motor support - Stainless steel screws

Certificazioni





Working point

Q [m ³ /h]	1077
P _{sta} [Pa]	253.9
P _{tot} [Pa]	259.6
P _{in} [kW] [W]	114.7
n _{sta}	0.662
n _{tot}	0.677
Rpm	920

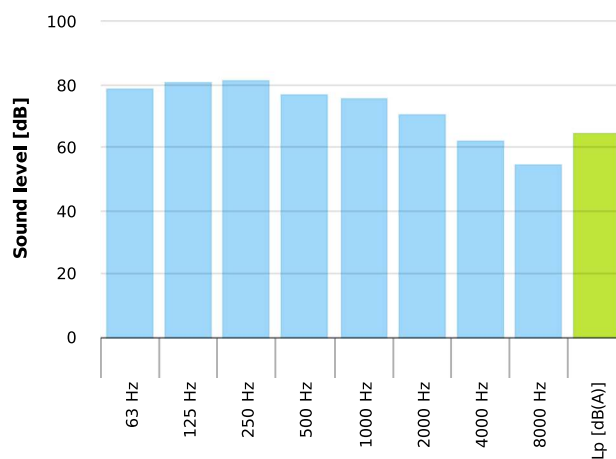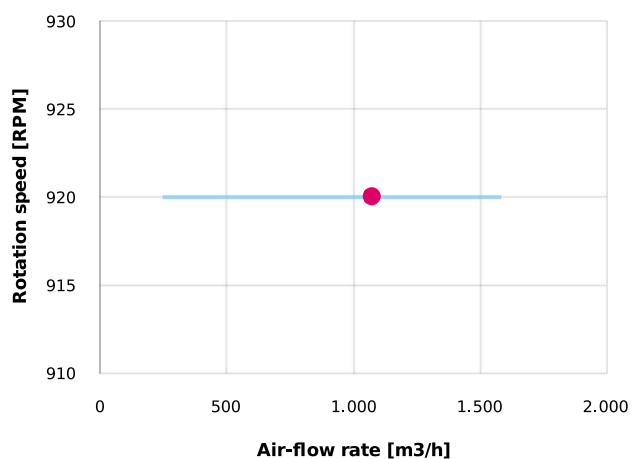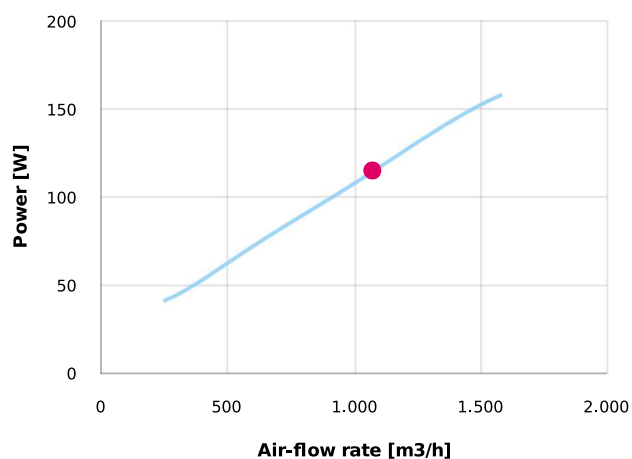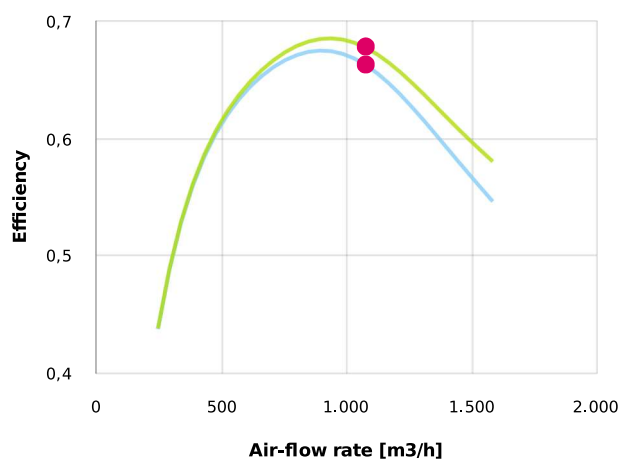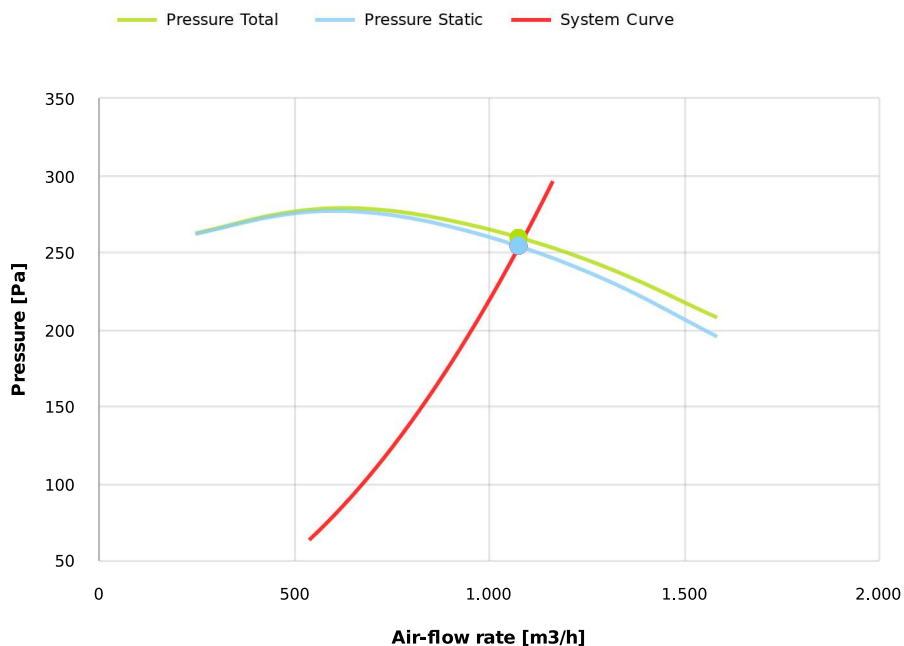


Dimensions

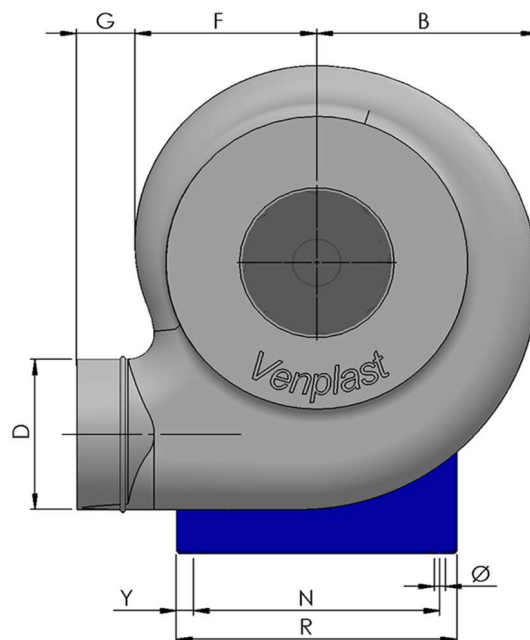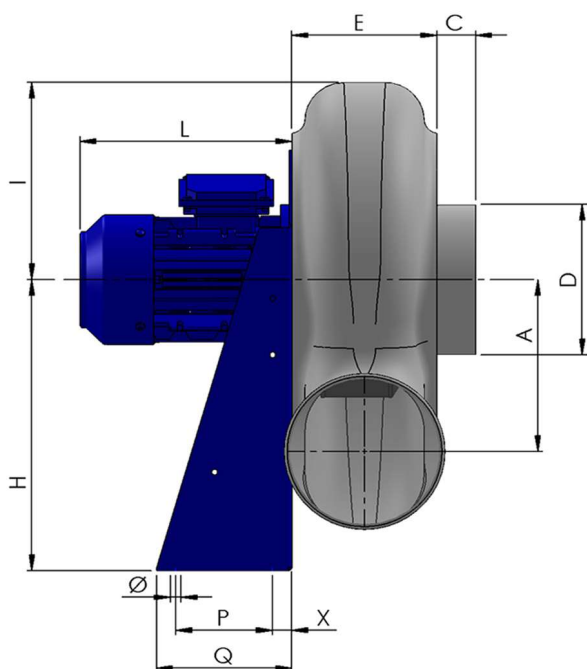


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
290	380	40	250	194	265	80	495	330	220	330	11	170	250
R				X				Y					
365				40				20					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

