


Research Data

Air-flow rate[m ³ /h]	294
Pressure[Pa]	333.3
Pressure Type	Psta
Power supply	all
Density[m ³ /h]	1.205

Label

Code	PA132ATEX
Voltage[V]	400
Phases	3
Current[A]	
Poles	2
Weight[kg]	14
Frequency[Hz]	50
Speed[rpm]	2800
Power[kW]	0.18
IP	55
INS	



PMN-A132ATEX

Pe-el antistatic housing -INOX impeller - epoxy painted motor support - stainless steel screws

Certificazioni





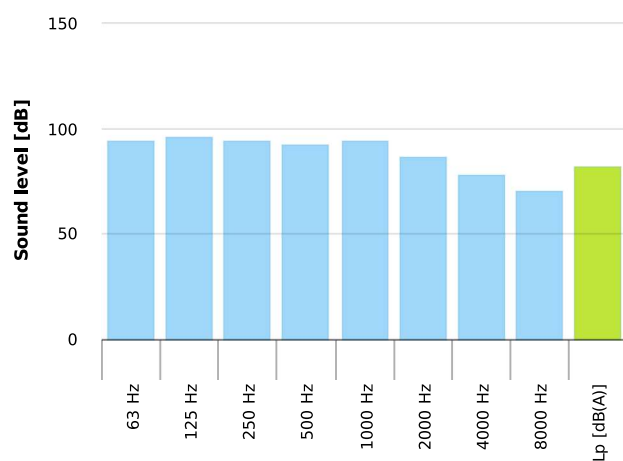


Table engines


Class IE	IE1
Size	63
Power[kW]	0.18
Current[A]	0.55
Voltage[V]	400
Cos φ	0.75
n	0.63

Working point

Q [m³/h]	294
P_{sta} [Pa]	333.3
P_{tot} [Pa]	340.1
P_{in} [kW] [W]	133.3
n_{sta}	0.203
n_{tot}	0.208
Rpm	2800

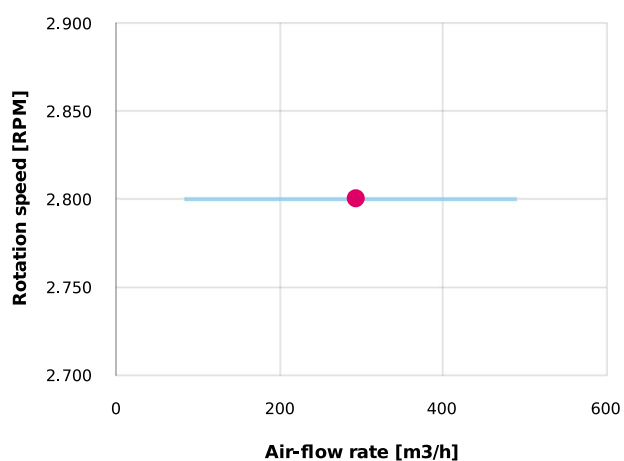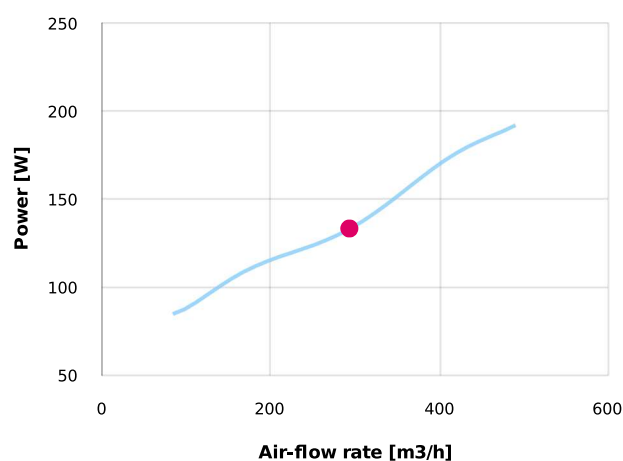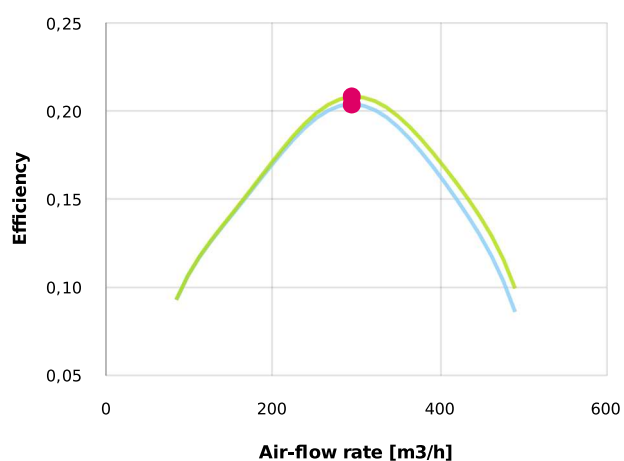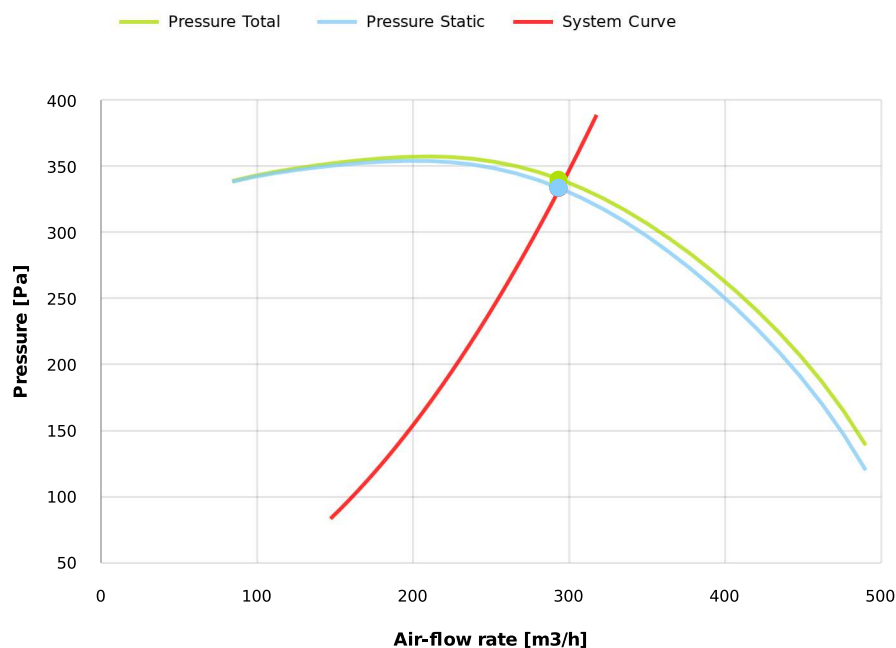


Dimensions

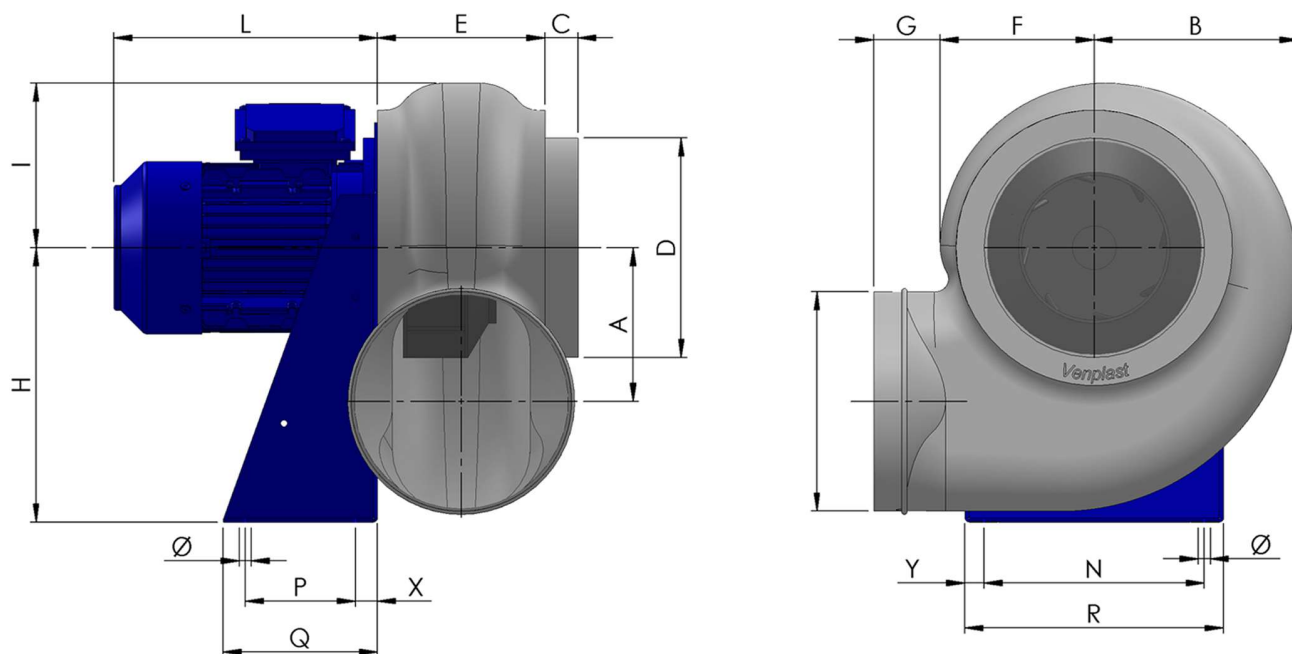


A	B	C	D	E	F	G	H	I	L	N	Ø	P	Q
90	125	25	125	110	94	55	170	110	190	210	11	50	85
R				X				Y					
235				17.5				12.5					

Configurations & cad


LG 0°




LG 45°




LG 90°




LG 135°




LG 180°




LG 225°




LG 270°




LG 315°




RD 0°




RD 45°




RD 90°




RD 135°




RD 180°



RD 225°



RD 270°



RD 315°

